MILITARY SPECIFICATION SHEET

INDICATOR, EVENTS, MINIATURE, DIGITAL, 28 VDC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for acquiring the indicator described herein shall consist of this specification and the latest issue in effect of MIL-I-8974.

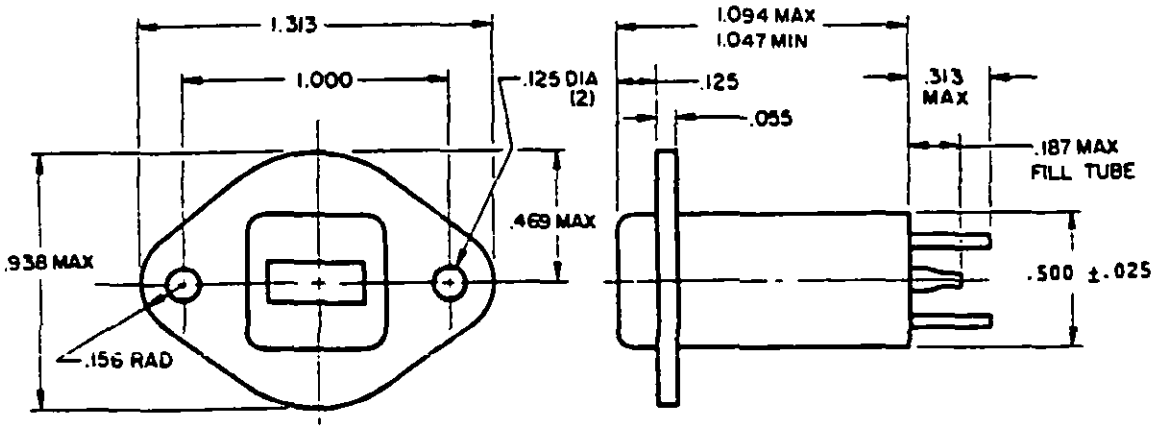

FIGURE 1.

REQUIREMENTS:

Dimensions and configuration: See Figure 1 and Table I. All dimensions are in inches. Unless otherwise specified, tolerances are ±.015.

TABLE I.

MILITARY PART NUMBER	MOUNTING	TEMPERATURE RANGE
M8974/2-003	W/O Flange	-55 to +125°C
M8974/2-004	W/Flange	-55 to +125°C

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

Power consumption: At 28 V DC and 25 ±2°C shall not exceed 1.5 W.

Weight: Shall not exceed .90 ounce.

Operational check: The indicator shall be capable of operating from 23 to 29 V DC. (See 3.9.1 and 4.6.2 of MIL-I-8974.)

Power supply tolerance: The 28 V DC type indicator shall be capable of operating at 23 V DC for 30 minutes and 29 V DC for 30 minutes without damage. (See 3.9.2 and 4.6.2 of MIL-I-8974.)

Supersession data:

Superseding part number	Cancelled part number
M8974/2-003	M8974/1-001, -003
M8974/2-004	M8974/1-002, -004
M8974/2-003	M8974/2-001
M8974/2-004	M8974/2-002
Cancelled Without Replacement	M8974/2-005, -006

Custodians:
Navy - AS
Air Force - 99

User activity:
Navy - SH

Review activity:
Air Force - 71

Preparing activity:
Navy - AS

(Project No. 6620-0447-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.