MIL-C-60578(MU)
AMENDMENT 2
15 November 1973
SUPERSEDING
AMENDMENT 1
25 January 1973

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - POWER SUPPLY, HUNDREDS DECADE
MATRIX AND READOUT - A3: 10547230

This amendment forms a part of Military Specification MIL-C-60578(MU) dated 18 June 1970.

Paragraph 3.7.2.1, line 4: Delete "±0.30" and substitute "±0.5". Also in lines 5, 6 and 7, delete "±0.2" and substitute " ±0.5".

Paragraph 3.7.2.2, line 2: Delete "2.0 ± 0.3" and substitute "3.0 ± 1.0".

Paragraph 3.7.2.3, line 4: Delete "2.5 ± .5 volts and substitute "2.4 ± 1.2 volts". Also in line 5, delete "1.5 ± .5" and substitute "1.5 ± 0.6".

Paragraph 3.7.2.4, line 2: Delete "22.5" and substitute "21", also delete "7.5" and substitute "7".

Paragraph 4.3.4: Delete this paragraph in its entirety and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commander, Frankford Arsenal, ATTN: SARFA-QAF.

FSC-1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC	TEST DATA TO COMPLY WITH
Cleaning	3.3.1.9
Drying	3.3.1.10
Coating Compound	3.3.1.11

* Paragraph 4.6.1: Delete third sentence and substitute "The vibration equipment shall be capable of providing the conditions of amplitude, frequency and duration specified in 3.4".

* Paragraph 4.6.1: Add the following sentence after the third sentence. "The vibration test shall be performed in accordance with Figure 514-1, Curve C of MIL-STD-810, except double amplitude shall not exceed .036 inch".

* Paragraph 4.6.2: In second sentence, delete "Procedure II" and substitute "Procedure I".

Paragraph 4.6.5.1, line 3: Delete "8.2k and substitute "3.3k". In line 5, delete " ± .20" and substitute " ± .5". In line 6, delete " ± .2" and substitute " ± .5". In line 7, delete " ± .2" and substitute " ± .5".

In line 8, delete " ± 0.30" and substitute " ± .5". In line 10, delete " ±2.0 ± .3" and substitute " 3.0 ± 1.0".

Paragraph 4.6.5.2, line 1: Delete "2.5 ± .5 volts" and substitute " 2.4 ± 1.2 volts. Also in lines 1 and 2, delete " 1 to 2" and substitute " 1.5 ± .6".

Paragraph 4.6.5.2b, line 3: Delete " 8.2K" and substitute " 3.3K".

Paragraph 4.6.5.4, second paragraph, line 3: Delete "8.2K" and substitue "3.3K."

Paragraph 4.6.5.5: In line 2, delete "22.5" and substitute "21"; in line 3, delete " $+22.5\ ^{+0}_{-2.5}$ " and substitute "$21\ ^{+2}_{-0}$"; in line 4, delete "22.5" and substitute "23" and delete " +80 ± 3" and substitute "80 ± 10".

Paragraph 4.6.5.6: In line 2, delete " +7.5" and substitute " +7"; in line 3, delete " $+7.5\ ^{+0}_{-0.4}$ and substitute " $+7\ ^{+1}_{-0}$"; in line 4, delete, " +8.0" and substitute " +9.0" and in line 5, delete " +80 ± 3" and substitute " +80 ± 10".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Figure 2: Delete and substitute:

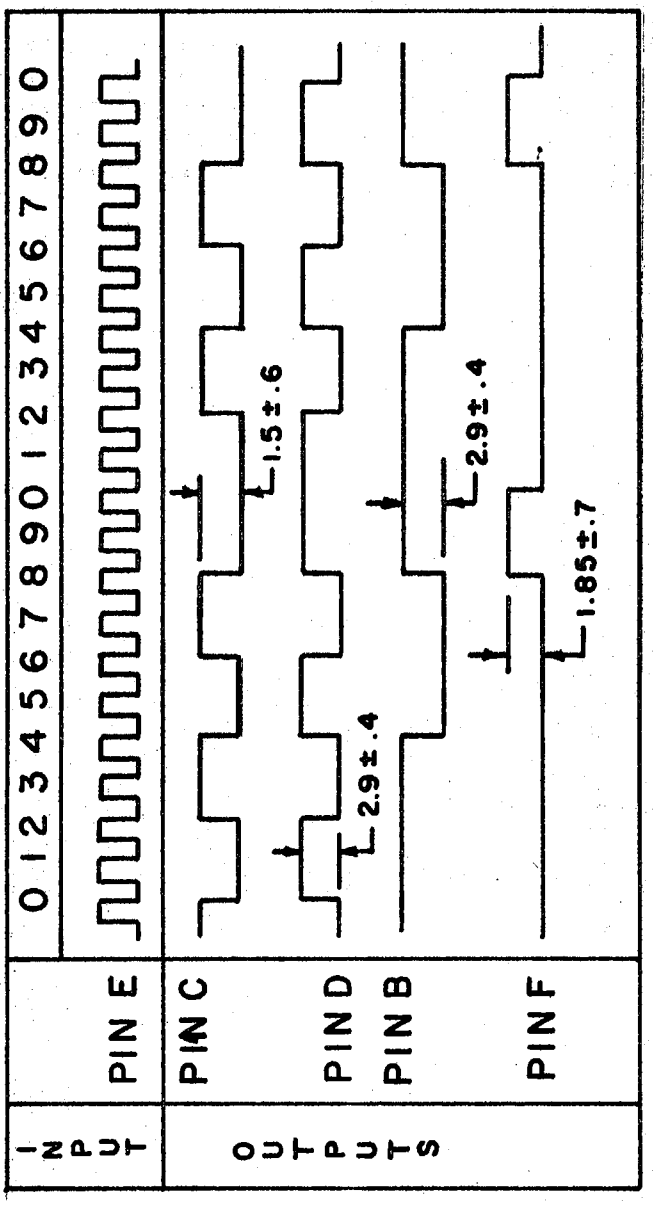


FIGURE 2 TIMING CHART

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Figure 3: Delete "8.2K Resistor on Pin J" and substitute "3.3K on Pin J".

* "The margin of this specification is marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 1240-A570

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.