MIL-G-62061A(AT)
AMENDMENT 3
31 March 1980
SUPERSEDING
AMENDMENT 2
28 February 1978

MILITARY SPECIFICATION

GENERATOR, ENGINE ACCESSORY, 28 VOLT DC,
RATED OUTPUT 300 AMPS

This amendment forms a part of Military Specification MIL-G-62061A(AT), dated 14 December 1973.

PAGE 1

2.1, under "SPECIFICATIONS, Federal", delete:
"QQ-P-416 - Plating, Cadmium (Electrodeposited)."

PAGE 2

2.1, under "SPECIFICATIONS, Military", add:
"MIL-I-45208 - Inspection System Requirements."
"MIL-C-81562 - Coatings, Cadmium, and Tin-cadmium, and Zinc (Mechanically Deposited)."

2.1, under "STANDARDS" and prior to "Military", add:
"Federal
FED-STD-H28/2 - Screw Thread Standards for Federal Services."

2.2, delete in its entirety:

PAGE 4

3.2.4, Delete in its entirety and substitute:

"3.2.4 Threaded parts. All screw threads shall conform to FED-STD-H28/2. The form, number per inch, and class of threads shall be as specified on applicable standards or drawings."

3.3.1, line 2, delete "on drawing 10898795" and substitute "in figure 2."

3.3.1.1, line 3, delete "on drawing 10898795" and substitute "in figure 2."

3.3.2, line 2, delete "deliner" and substitute "deliver."

3.3.4, line 2, after first "shall", delete "no" and substitute "not."

FSC 2920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

PAGE 5

3.3.6, line 3, delete "shall conform to the curve shown on drawing 10898795" and substitute "shall conform to limits shown on figure 3."

PAGE 6

3.4.3, delete in its entirety.

3.4.4, line 2, add the following to end of paragraph: "or type I, class 3 of MIL-C-81562."

PAGE 7

3.6, line 6, delete "and", and substitute: "or".

4.1, delete in its entirety and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

4.1.2, delete first sentence after heading, and substitute:

"Unless otherwise specified by the procuring activity, the contractor shall provide and maintain an effective inspection and quality control system conforming to MIL-I-45208."

PAGE 11

Table IV, add after last test:

"4.6.3 Endurance (reduced) 1/".
and add below table:
"1/ Test steps of 45 minutes duration".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

PAGE 13

4.6.2.1, last line, delete "drawing 18098795" and substitute "figure 2".

4.6.3, Test set 5, delete "300 AMPS" and substitute "400 AMPS".

PAGE 14

4.6.7, delete in its entirety and substitute:

"4.6.7 Interpole voltage.

4.6.7.1 Instrumentation. A D'Arsonval type movement meter shall be used for voltage and current measurements during tests. A mercury-bulb thermometer shall be used for temperature measurements of generator cooling-fan intake air. Locate thermometer in-line with fan centerline at a distance of 3 foot inches ± 6 foot inches from fan. Shield thermometer from any hot surface radiations that may be present. The generator inlet cooling air shall be ducted to simulate the ducting configuration of the generator installation of the M60A1 vehicle.

4.6.7.2 Test operation. To determine conformance to 3.3.6, the generator shall be operated with a separately excited field (from a constant power supply) at 5500 rpm with a resistive load of 390 amperes at 28 volts until conditions temperature stabilize. After stabilization, record interpole voltage, load current, terminal voltage and cooling-air temperature. Using figure 3, find cooling-air temperature equivalent to that recorded. The recorded interpole voltage of the generator must fall within the limits (figure 3) on the ordinate determined by the cooling-air temperature."

PAGE 16

5., delete in its entirety and substitute:

"5. PACKAGING

5.1 Preservation, packaging, packing and marking. Preservation, packaging, packing and marking shall be in accordance with the packaging data sheet or packaging standard, as furnished at time of invitation for bids, for the level of preservation and packaging and level of packing specified (see 6.2)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

PAGE 17

6.2, subparagraph (e), delete in its entirety and substitute:

"e. Selection of applicable level of preservation and packaging and level of packing (see 5.1)."

PAGE 18

6.5.5, lines 2 and 3, after heading "Maximum operating speed", delete text and substitute: "Maximum operating speed shall be as indicated on figure 2."

6.5.6, line 3, After "output", add: "as indicated on figure 2.", and delete last sentence.

6.6, delete in its entirety and add:

"6.6 Recycled materials. The use of recycled materials, which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item, shall be encouraged."


Add: New figures "2" and "3".

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2920-A381

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

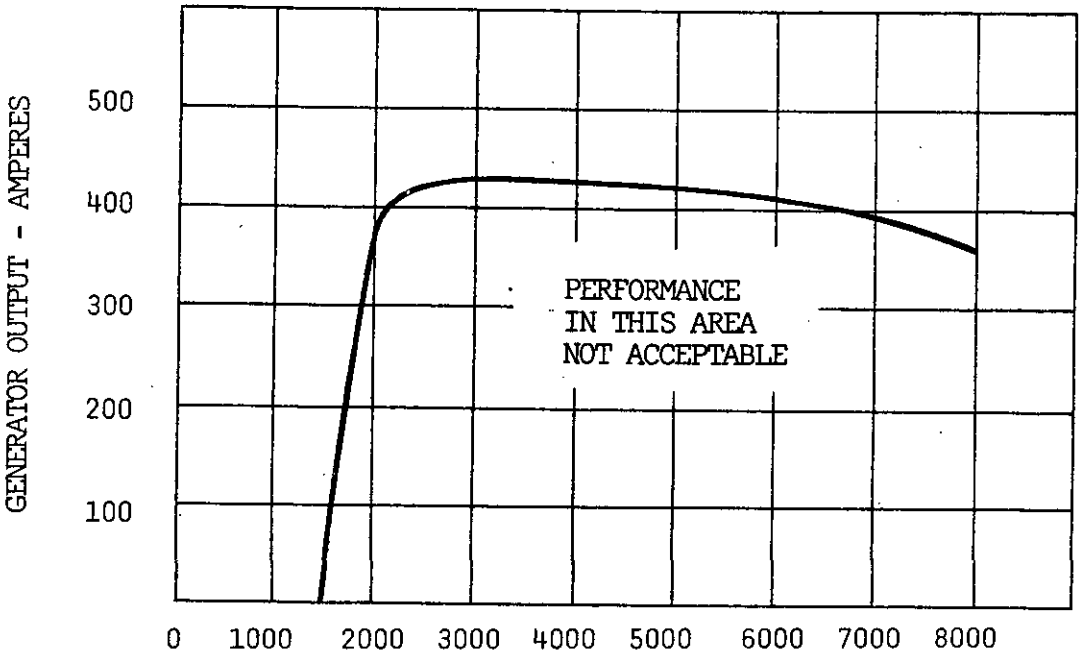

RPM	AMP	
1500	0	- CUT-IN SPEED
1625	100	
1750	200	
1900	300	- MIN SPEED AT RATED OUTPUT
2000	380	- PERFORMANCE CHECK POINT
2500	425	
3000	425	
4000	425	
5000	425	
6000	415	
8000	360	- MAX OPERATING SPEED
10000	OVERSPEED	

FIGURE 2. Performance curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.

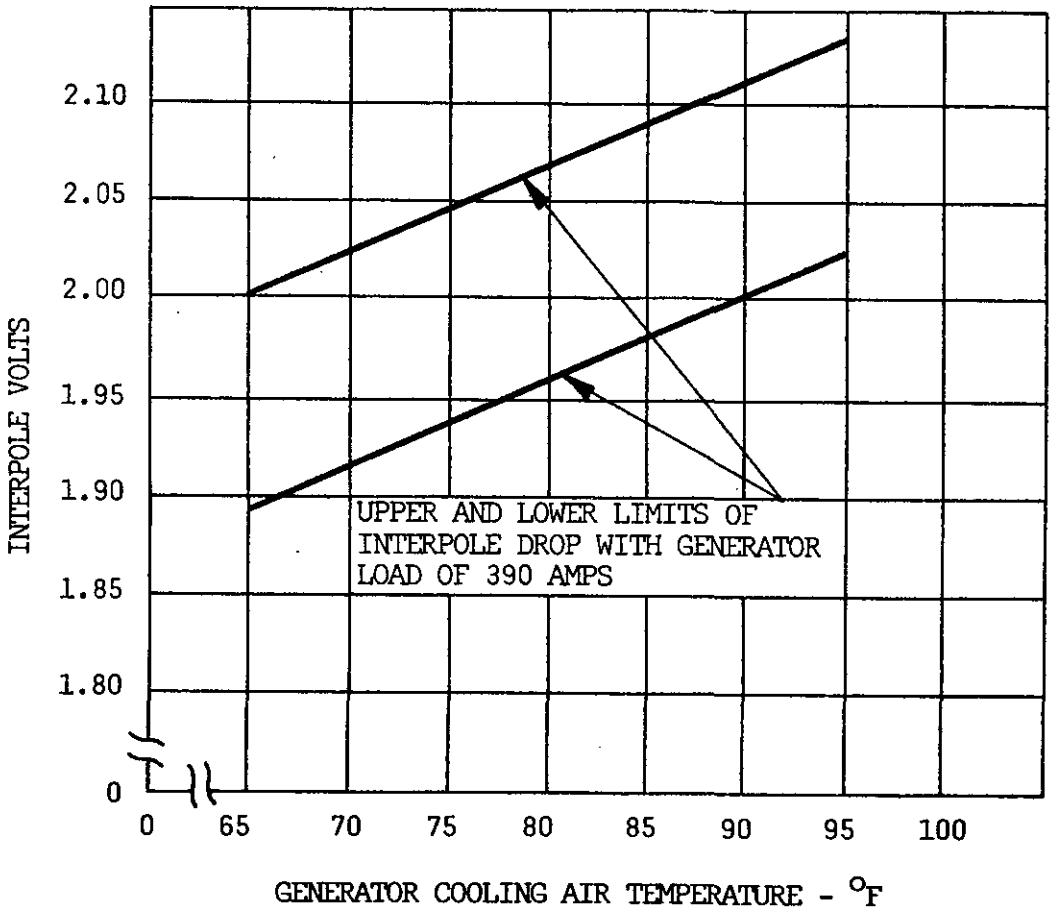


FIGURE 3. Generator interpole voltage drop at 390 amp load vs generator cooling air temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:13Z
Check the source to verify that this is the current version before use.