MILITARY SPECIFICATION

TRAINER, FIELD ARTILLERY; DIRECT FIRE (LASER): 11746409

WARNING EYE HAZARD

THE LASER BEAM CAN BE DANGEROUS AND CAUSE BLINDNESS IF IT ENTERS THE EYES EITHER DIRECTLY OR REFLECTED OFF OF A REFLECTED SURFACE. BEFORE FIRING THE LASER, OPERATOR SHOULD TAKE ADEQUATE PRECAUTIONS TO ASSURE MAXIMUM SAFETY.

The specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of adapter w/e for using the Laser Trainer M55 (F11741700) for field artillery direct fire training. (see 6.1 for intended use).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-O-13830	Optical Components for Fire. Control Instruments, General Specification Governing the Manufacture, Assembly and Inspection of
MIL-F-13926	Fire Control Material, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition Maintenance and Disposition of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 20261O-22T19:32Z
Check the source to verify that this is the current version before use.

MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U.S. Army, Frankford Arsenal

F8565556	Pressure tester
F11739405	Final Test Fixture
F11741700	Laser, Tank Gunnery Trainer M55
A11746409	Trainer, Field Artillery: Direct Fire (Laser)
D11748410	Vibration and Shock Adapter

PACKAGING-DATA SHEET

PS 11746409	Packaging of Trainer, Field Artillery; Direct Fire (Laser)

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

3. Requirements

3.1 Fabrication. - The unit shall be manufactured in accordance with Drawing A11746409 and all drawings pertaining thereto.

3.2 General specification. - The artillery trainer shall meet the following requirements, where applicable, of MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Electrical and electronic assemblies
e. Part identification and marking
f. Workmanship
Source control drawings
h. Applicable Quality Assurance Provisions

3.2.1 Assemblies. - Assemblies listed below shall have been inspected and accepted in accordance with their respective drawings and SQAPS prior to being assembled:

a. Deflector Assembly 11746410
b. Box, Distribution 11746450
c. Cable Assembly 11746452
d. Cable Assembly 11746454
e. Switch, Lanyard 11746480

3.3 Interchangeability. - The artillery trainer shall meet all the requirements of this specification without need for selective assemblies for any item. Unless otherwise specified in detail drawings or assemblies, all componedts shall be interchangeable. No incompatibility shall exist between the replacement item and the mechanical interface/fits, or electrical and optical function of the system.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T19:32Z
Check the source to verify that this is the current version before use.

3.4 Reliability. - The artillery trainer shall have a Mean Actuations Between Failure (MABF) of 30,000 exclusive of the laser gun (M55).

3.5 Environmental requirements.

3.5.1 Operational conditions. - The artillery trainer shall show no evidence of damage or deterioration and shall meet all requirements of 3.6 under the following environmental conditions.The following items are excluded:

a.	11747153	Deflection Table (105MM HOW., M1O1)
b.	11747154	Deflection Table (105MM HOW.,M102)
c.	11747155	Deflection Table (155 MM HOW., Ml14A1)
d.	11747156	Deflection Table (155 MM HOW., M109A1)
e.	11747167	Container Shipping and Storage

3.5.1.1 Temperature. - After thermal stabilization of -18°C (0°F) and 38°C (100°F).

3.5.1.2 Humidity. - Conditions specified in Method 507.1, Procedure IV, M1L-STD-810, except the number of humidity cycles will be limited to two.

3.5.2 Non-operating conditions. - The artillery trainer and its equipment, shall show no evidence of damage or deterioration and shall meet all requirements of 3.6 after the following environmental exposure. The following items are excluded:

a.	11747153	Deflection Table (105MM., M101)
b.	11747154	Deflection Table (105MM HOW., M102)
c.	11747155	Deflection Table (155 MM HOW., M114A1)
d.	11747156	Deflection Table (155 MM HOW., M109A1)
e.	11747167	Container Shipping and Storage

3.5.2.1 Storage temperature. - Thermal stabilization at -54°C (-65°F) for 24 hours and 66°C (+150°F) for 24 hours.

3.5.2.2 Vibration "A". - Conditions specified in Method 514.2, Procedure VIII, Curve V, Figure 514.2-6, Table 514.2-VI, M1L-STD-81O, with trainer mounted in simulated operating position.

3.5.2.3 Vibration "B". - Stored: Conditions specified in Method 514.2, Procedure X, Curve AY, Table 514.2-VII, Figure 514.2-7, MIL-STD-810, with the trainer properly stored in the transit and storage case, Drawing F11747158.

3.5.2.4 Shock. - The trainer shall operate in accordance with the requirements of this specification and shall show no evidence of damage or deterioration following exposure to conditions specified in Method 516.2,

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T19:32Z
Check the source to verify that this is the currentversion before use.

Procedure I, Figure 516.2-1, shock parameters (a) and (c), Procedure II limited to 76 centimeters (30 inches) and V, MIL-STD-810.

3.5.2.5 Sunshine. - Conditions specified in Method 505.1, Procedure I, MIL-STD-8100. Temperature of the reflective targets-limited to 66°C (150°F).

3.5.2.6 Rain. - Conditions specified in Method 506.1, Procedure I, MIL-STD-810. There shallbe no evidence of water inside the deflector assembly.

3.6 Operational performance.

3.6.1 Mechanical and electrical interface. - The mount assembly shall be as specified on Drawing F11747147. The conductivity between the mount and the laser trainer mounting ring shall be such that the DC resistance shall not exceed .01 OHM.

3.6.2 Power input control. - The position of the artillery trainer selection switch shall indicate the "Foresight", "OFF" or "Firing" function of the trainer.

3.6.2.1 Boresight mode. - When the M55 Trainer mode switch is in the continuous position and the Artillery trainer selection switch is in the boresight position, the M55 Trainer shall emit laser light continuously.

3.6.2.2 Firing mode. - When the M55 Trainer mode switch is in the flash -position" and the artillery trainer selection switch is in the firing position, activation of the lanyard switch shall cause the M55 Trainer to emit laser light. There shall be no further light emission unless the lanyard switch is reactivated.

3.6.3 Deflection movement.

3.6.3.1 Excursion range. - Boresight movement shall provide a minimum of 50 mils movement in each direction of both elevation and azimuth.

3.6.3.2 Beam accuracies:

3.6.3.2.1 Depression. - With the deflector level vial reading level and the laser beam originally horizontal, rotation of the elevation knob by 50 mils in depression shall cause the laser beam to depress 50 mils within ± 2 roil.

3.6.3.2.2 Plumb travel. - With the deflector level vial reading level and the laser beam originally horizontal, rotation of the elevation knob by 50 mils in depression shall not cause the laser beam to move in azimuth by more than 2 mils from the position established at zero elevation.

3.6.3.2.3 Azimuth. - With the deflector level vial reading level and laser beam horizontal, rotation of the azimuth knob by 40 mils in azimuth, in both directions, shall cause the laser beam to move correspondingly by 40 mils within ±2 mils

Source: https://assist.dla.mil -- Downloaded: 20260-22T19:32Z
Check the source to verify that this is the current version before use.

3.6.3.2.4 Level travel. - With the deflector level vial reading level and the laser beam horizontal, rotation of the azimuth knob by 40 mils in azimuth, in both directions, shall not cause the laser beam to move in elevation or depression by more than 2 mils from the position established at zero azimuth.

3.6.3.3 Blacklash. - The boresight movements in azimuth and elevation shall be capable of meeting this requirement over the full limit of travel in each direction. Backlash in each boresight movement shall not exceed 1 mil.

3.7 Sealing. - The deflector assembly of the Artillery trainer shall withstand an internal pressure of 5 ± 0.10 pounds per square inch gage (PSIG) for a minimum of one hour with no evidence of leakage. The deflector assembly shall then be flushed with dry nitrogen having a dew point at least as low as -32°C (-25F) and resealed at 0.0 ±0.2 PSIG.

3.8 Targets. - The retroflective targets shall meet all the requirement listed on Drawings C11746464, F11746475, and E11746460.

3.9 Frame assembly. - The frame assembly (retroflective targets) shall meet all requirements listed on Drawings C11746509 and F11746502.

3.10 Deflection tables. - The deflection tables shall meet all the requirements listed on Drawings 11747153, 11747154, 11747155 and 11747156.

3.11 Mount assembly. - The mount assembly shall meet all the requirements listed on Drawings D11747146 and F11747147.

3.12 Multi-purpose carrying case. - The multi-prpose case shall meet all the requirements listed on Drawing F11747158.

3.13 Distribution box. - The distribution box shall meet all the requirements listed on Drawing F11746450.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in-the specification where such inspection are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.2 First article (initial production) approval. - The requirement for first article approval and the responsibility (Government-or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three Artillery trainers and three each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production. The first article sample of three each of all items covered by SQAP shall be tested to their respective SQAP requirements. The first article sample of three Artillery trainers shall be subjected to the requirements and tests in Tables I, II, III, IV and the following:

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Reliability	3.4	4.4.3
Vibration "B"	3.5.2.3	4.6.6
Sunshine	3.5.2.5	4.6.8
Rain	3.5.2.6	4.6.9

4.2.1 Government testing. - When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor’s inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. - Unless otherwise specified by the Contracting Officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. - All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.3.2.2 Artillery Trainer. - Examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristics) basic in accordance with MIL-STD-105 and the sampling plans specified in Tables I thru IV herein. Examination and tests for packaging, packing and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables I thru III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I. 100% INSPECTION

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
101	Power Input Controls	3.6.2	4.6.11
102	Deflection Movement	3.6.3	4.6.12
103	Sealing	3.7	4.6.13

NOTE : These tests shall be conducted at a temperature between 15°C (60°F) and 32°C (90°F).

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General. - One assembly shall be selected at random as a special sampling from each 100 produced, The sample shall meet the requirements and test in Table II.

TABLE II

NO.	CHARATERISTIC	REQUIREMENT	TEST PROCEDURE
301	Fabrication	3.1	Applicable Drawing Visual
302	General Specification	3.2	MIL-F-13926, MIL-O-13830-Visual
303	Interchangeability	3.3	4.6.1
304	Interface	3.6.1	4.6.10

4.4.2 Environmental. - One artillery trainer shall be selected at random as a sample from each 50 produced, or from each month’s production whichever occurs first. Each sample shall meet the requirements and tests in Table III and shall then meet all the requirements and tests in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE III

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
401	Temperature-operating	3.5.1.1	4.6.2
402	Temperature-storage	3.5.2.1	4.6.4
403	Humidity	3.5.1.2	4.6.3
404	Vibration "A"	3.5.2.2	4.6.5
405	Shock	3.5.2.4	4.6.7

4.4.3 Reliability. - A Reliability Demonstration Test shall be conducted as part of First Article Test (FAT) to assure compliance with the requirement of para 3.4 at a 90% confidence level, A minimum of 2300 actuations on each of the 3 First Article samples (see 4.2) shall be accumulated after/during exposure to each operating/non-operating environment of para 3.5.1 and 3.5.2. Additional actuations may be required at 24°±8°C (75°±15°F) in order to accumulate a minimum of 23,000 actuations on each First Article sample. The Artillery trainer shall be tested until the total actuations meet the accept/reject criteria in Table V.

TABLE IV

Actuations Minimum	Reliability Failures Accept#	Reject #
69,075	0	3
116,685	1	3
159,675	2	3

4.4.3.1 Data collection. - Data collected will consist of all equipment malfunctions, number of actuations completed when the malfunctions. occured, nature and cause of malfunction, time required to correct malfunction, required corrective action, item serial number, and environmental exposure.

4.4.3.2 Failure definition. - A failure is defined as any malfunction which renders the trainer inoperative or operative outside the limits of this specification. In determination of chargeable reliability failures, the following clarification shall apply.

a. If upon failure analysis (to determine the cause of the the malfunction will not be chargeable as a reliability failure. However, the correction to the manufacturing process or procedure (et al) shall be accomplished.

b. If upon failure analysis no assignable cause is evident and the malfunction is considered random in nature, the malfunction shall be a "chargeable reliability failure" and as such, must be considered in the above demonstration criteria. The decisions as to chargeable reliability failures must be coordinated with the procuring activity, Frankford Arsenal, Reliability & Maintainability Engineerlng Branch (SARFA-QAF-R).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.4.3.3 System interruption. - A system interruption is any system malfunction for which the trainer is operable within the limits set forth in this specification but required maintenance to correct the malfunction. Although a system interruption does not penalize the reliability, it may constitute a failure of some major subassembly or component for which system acceptance cannot be made until that characteristic or component which caused the system interruption has been screened. Subsequent to the Reliability/FAT, the sample systems shall be refurbished and readied for delivery and shipment.

4.4.4 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot will be suspended by the Government until necessary corrections have been made by the contractor and resubmitted items have been approved (see 4.3.3).

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment. - Where the contract provides for Government test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607. An M55 laser gunnery trainer (FSN 6920-689-4036) shall be provided to the contractor for use in the performance, vibration and shock testing.

4.5.2 Contractor furnished inspection equipment.


4.5.2.1 Government design. - All inspection equipment specified by drawing number in specification or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data included in the technical data package list.

4.5.2.2 Contractor design. - The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "“Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design-must be considered as part of the prescribed product tolerance limit. Thus, Thus , concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.3 Inspection equipment design requirements.

4.5.3.1 Target. - The target. shall be labelled and dimensioned as shown in figure 1 herein. The target shall consist of black lines or marks on a white background. The crosshair without a tolerance block around it, is the final test fixture alignment crosshair used in setting up the target.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

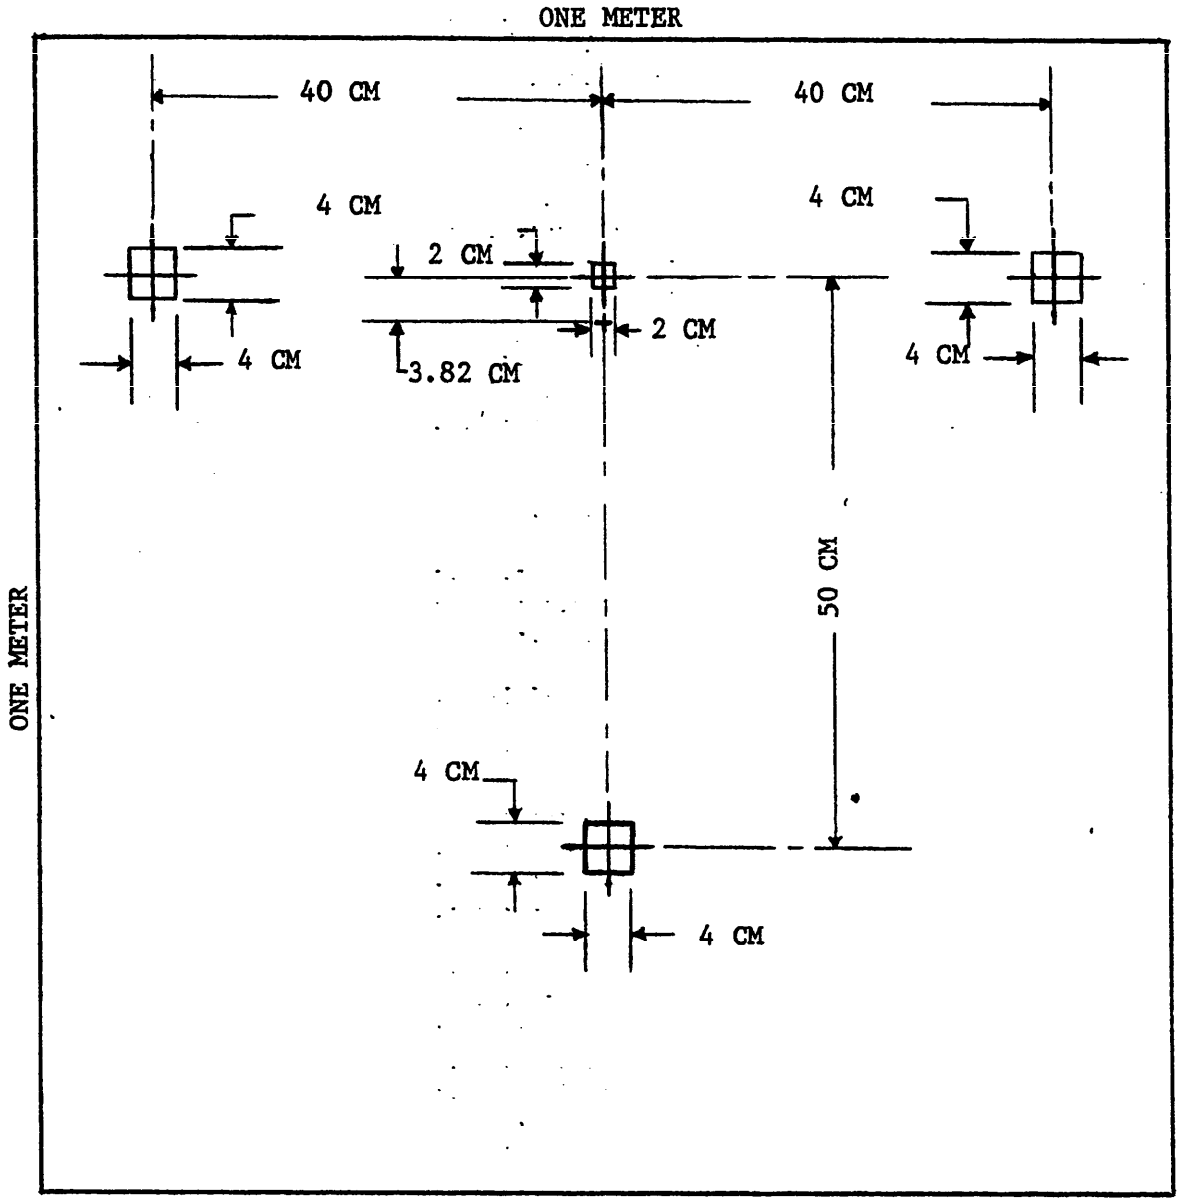

TEST TARGET

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.6 Test methods and procedures. - Unless specified within shall be tested between 15°C (60°F) and 32°C (90°F). The rate of temperature change shall not exceed 2°C (3.6°F) per minute.

4.6.1 Interchangeability. - The three artillery trainers shall be selected to perform the interchangeability tests. The three trainers shall be disassembled into major components, and randomly assembled to determine compliance with 3.3.

4.6.2 Operating temperature. - Perform this test in accordance with temperature cycling, Procedure I of MIL-F-13926, except with conditions of -18°C (0°F) and 38°C (100°F) to determine compliance with 3.5.1.10 allow temperature to stabilize for at least two hours before performing test 4.6.10 thru 4.6.12.

4.6.3 Operating humidity. - This test shall be performed as specified in MIL-STD-810, Method 507.1, Procedure IV, except perform only two cycle while testing 4.6.10 thru 4.6.12 to determine compliance with 3.5.1.2.

4.6.4 Storage temperature. - Perform this test in accordance with temperature cycling. Procedure I of MIL-F-13926, except with conditions of -54°C (-65°F) and 66°C (150°F) to determine compliance with 3.5.2.1. subsequent to this test the unit shall meet 4.6.10 thru 4.6.12. This test may be performed in conjunction with 4.6.2.

4.6.5 Vibration "A". - This test shall be performed on the deflector optical assembly F11746410 only. The deflector assembly shall be mounted on a M55 Laser gunnery trainer with the laser tube removed and the M55 mounted in the Vibration and Shock Adapter D11748410. The test shall be performed in accordance with Method 514.2 of MIL-STD-810, Procedure VIII, Curve V, Figure 514.2-6, Table 514.2-VI with a vehicle mileage of 3000 miles. Subsequent to this test, the unit shall be subjected to 4.6.10 thru 4.6.12 to determine compliance with 3.5.2.2.

4.6.6 Vibration "B". - This test shall be performed on the storage case and all its contents. The storage case shall be steel banded to at least three 4" x 4" wooden rails which are mounted to the vibration table. This test shall be performed in accordance with Method 514.2 of MIL-STD-810, Procedure X, Curve AY, Table 514.2-VII, Figure 514.2-7 for four cycles with the unit properly stored in the transit and storage case. Subsequent to this test, the unit shall be subject to 4.6.10 thru 4.6.12 to determine compliance with 3.5.2.3.

4.6.7 Shock. - This test shall be performed on the deflector assembly only as specified in MIL-STD-810, Method 516.2, Procedure I, Fig. 516.2-1, shock parameters (a) and (c), Procedure II limited to 76 centimeters (30 inches) and V. subsequent to this test, the unit shall be subjected to 4.6.10 thru 4.6.12 to determine compliance with 3.5.2.4. In performing procedure I the unit shall be mounted as in paragraph 4.6.5.

4.6.8 Sunshine. - This test shall be performed as specified in MIL-STD-810, Method 505.2 Procedure I. Subsequent to this test the unit shall be tested to 4.6.10 thru 4.6.12 and subjected to a visual examination to determine compliance with 3.5.2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.6.9 Rain. This test shall be performed on the deflector assembly only as specified in MIL-STD-810, Method 506.2 Procedure I. Subsequent to this test the unit shall be tested to 4.6.10 thru 4.6.12 to determine compliance wiht 3.5.2.6. A visual inspection shall show no evidence of moisture inside the deflector housing.

4.6.10 Mechanical and electrical interface. - This test shall be performed using a standard resistance bridge or equivalent. Measure the D.C. resistance between the M55 ground and the mount F11747147 to determine compliance with 3.6.1.

4.6.11 Controls. - Requirements 3.6.2.1 and 3.6.2.2 shall be performed with a visual verification of correct operation.

4.6.12 Deflection movement. - A wall target as described in 4.5.3.1 shall be positioned in accordance with the set-up procedure on Drawing F11739405 at a distance of ten meters in front of the deflector assembly. The face of the target shall be perpendicular to the line of sight of the artillery trainer and the target shall be plumbed. With the M55 Gunnery trainer mounted in the find test fixture F11739405, attach the artillery trainer to the M55 and level the level vial. Rotate the index mark on the shoulder of the adapters to align with the arrow on the deflector housing. Be sure to align the marks only in the center of travel of the adapters. After making all the proper electrical connections, apply power and verify that the center of the laser beam falls inside the backlash tolerance block on the target (2cm x 2 cm). If necessary, place the center of the laser beam on the center of the crosshair of the backlash tolerance block. Verify that both the azimuth and elevation knob scales read zero, correct if necessary using the slip scales. Using this setup perform 4.6.12.1 and 4.6.12.2.

4.6.12.1 Elevation. - Rotate the elevation knob in depression to to 50 mil setting. At the target visually determine if the laser beam center is within the tolerance block around the 50 mil crosshair. Slowly return the elevation knob to the 0 mil setting, being careful not to overshoot and at the target visually determine if the laser beam Center is inside the backlash tolerance block of the central crosshair. This test will determine compliance with 3.6.3.2.1 and 3.6.3.2.2.

4.6.12.2 Azimuth. Rotate the azimuth knob in either direction to the 40 mil setting. At the target visually determine if the laser beam center is within the tolerance block around the 40 mil crosshair. Slowly return the azimuth knob to the 0 mil setting being careful not to overshoot and at the target visually determine if the laser beam center is inside the backlash tolerance block of the central crosshair. Repeat this procedure in the opposite direction. This test will determine compliance with 3.6.3.2.3 and 3.6.3.2.4.

4.6.12.3 Sealing. - This test shall be performed utilizing special test equipment. The pressure testing equipment to test sealing of the deflector assembly shall conform to the internal pressure test requirements of Drawing F8565556, pressure-two; station, to conform to the requirements of 3.7. At the conclusion of this test the deflector assembly shall be flushed and pressurized in accordance with the requirements of 3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

5. Preparation for Delivery.

5.1 Packaging, packing and marking. - Packaging, packing, and marking shall be in accordance with Pakaging Data Sheet l1746409 Trainer, Field Artillery; Direct Fire (Laser) The level of protection shall be as specified in the contract.

6. Notes.

6.1 Intended use. - The artillery trainer is an adaptation of the M55 Laser Tank Gunnery Trainer for direct five training of artillery howitzer sections. (105-MM Howitzer M102 Towed, 105MM Howitzer M101 series towed, 155MM Howitzer M14A1. Towed, 155MM Howitzer M109A1 self-propelled, 105MM Howitzer XM204 Towed, 155MM Howitrzer XM198 Towed). The trainer will provide year-around training of section personnel in standard direct fire techniques while engaging both stationary and moving targets on a scale range. The trainer will allow realistic firing exercises to be conducted in garrison, without having to move howitzers to a live firing range and without expending either sub caliber or service ammunition.

6.2 Ordering Data. - Procurement documents should specify the following:

a. Title, number and date of specification
b. Applicable packing data sheet (See 5.1)
c. Selection of applicable levels of preservation, packaging and packing.
d. Applicable stock number.
e. Requirements for First Article submission which may include additional tests selected by the procuring agency.

Custodian
Army - MU

Preparing Activity:
Army - MU
Project number 1240-A671

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-48578(MU) Trainer, Field Artillery; Direct Fire (Laser): 11746409

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.