INCH-POUND


MIL-DTL-28840/11C
23 October 2009
SUPERSEDING
MIL-DTL-28840/11B
26 April 2007

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS, RECEPTACLE, CABLE CONNECTING, CLASSES D, DS, P, T, AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

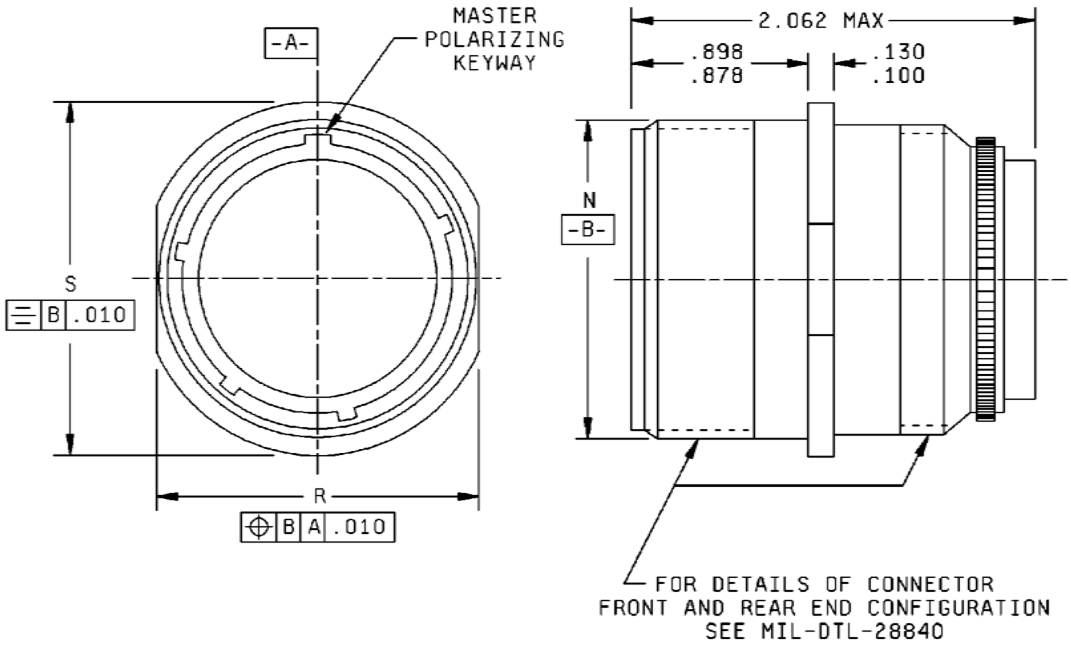

Inches	mm
.010	0.25
.016	0.41
.100	2.54
.130	3.30
.878	22.30
.898	22.81
2.062	52.37

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	N dia max	R	S	Insert arrangements, (see MIL-STD-1698)
A (11)	.750 (19.05)	.768 (19.51) .758 (19.25)	.963 (24.46) .943 (23.95)	Section 90
B (13)	.875 (22.22)	.893 (22.68) .883 (22.43)	1.088 (27.63) 1.063 (27.13)	Section 10
C (15)	1.062 (26.97)	1.080 (27.43) 1.070 (27.18)	1.275 (32.38) 1.255 (31.88)	Section 20
D (17)	1.125 (28.58)	1.143 (29.03) 1.133 (28.78)	1.338 (33.98) 1.318 (33.48)	Section 30
E (19)	1.312 (33.32)	1.330 (33.78) 1.320 (33.53)	1.525 (38.74) 1.505 (38.23)	Section 40
F (23)	1.500 (38.10)	1.518 (38.56) 1.508 (38.30)	1.713 (43.51) 1.693 (43.00)	Section 50
G (25)	1.625 (41.28)	1.643 (41.73) 1.633 (41.48)	1.838 (46.09) 1.818 (46.18)	Section 60
H (29)	1.812 (46.02)	1.893 (48.08) 1.883 (47.83)	2.088 (53.04) 2.068 (52.53)	Section 70
J (33)	2.000 (50.80)	2.080 (52.83) 2.070 (52.58)	2.275 (57.78) 2.255 (57.28)	Section 80

NOTES
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating.
5. Designator of backshell size within each shell size.


FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Classes: D, DS, P, T, and Z.
Insert Arrangement: See the section of MIL-STD-1698 corresponding to desired shell.
Contacts: Style P or S crimp type.
Shell polarization: 1 thru 6, key position.
Marking: Part or Identifying Number (PIN) on shell.
Mating counterpart: Plug connectors specified in MIL-DTL-28840/16, 17, 18, 19, 26, 28, and 29.
Installation and removal tool: As specified in MIL-I-81969/33 and /34.
A backshell shall be used to meet moisture and water pressure requirements.

PIN example:

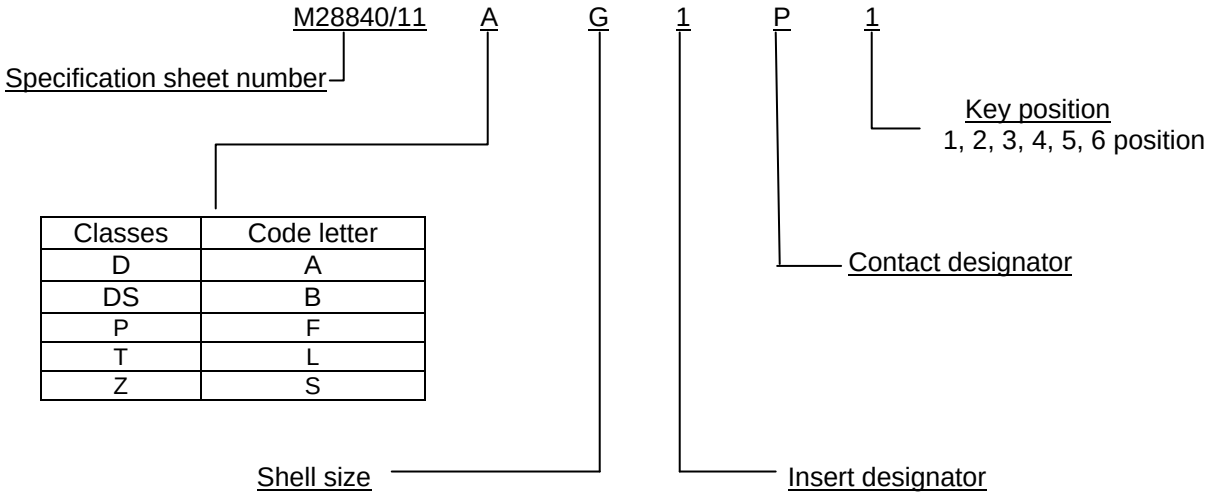

Classes	Code letter
D	A
DS	B
P	F
T	L
Z	S

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16
MIL-DTL-28840/17
MIL-DTL-28840/18
MIL-DTL-28840/19
MIL-DTL-28840/26
MIL-DTL-28840/28
MIL-DTL-28840/29
MIL-I-81969/33
MIL-I-81969/34
MIL-STD-1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5935–2007-223)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.