
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS RECEPTACLE, MOUNTING BOX, CLASSES D AND DS

This specification sheet is approved for use by the Naval Electronic Systems Command. Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of specification MIL-C-28840.

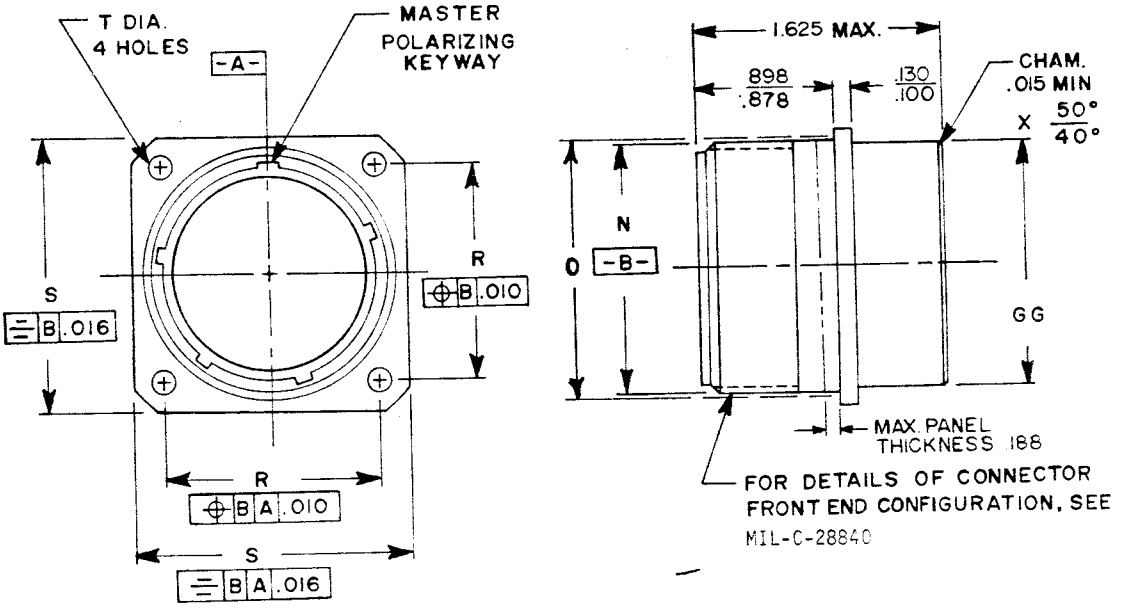

INCHES	MM
.010	0.25
.015	0.38
.016	0.41
.100	2.54
.130	3.30
.188	4.78
.878	22.30
.898	22.81
1.625	41.28

(B) Denotes change

FIGURE 1. Dimensions and configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20260-20T19:37Z
Check the source to verify that this is the current version before use.

(B) TABLE I. Dimensions and configuration

DESIGNATOR 1/	N DIA. MAX.	O REF MTG HOLE	R T.P. ℄ TO ℄	S	T	GG DIA. MAX	FOR INSERT ARRANGEMENTS MIL-STD-1698
A (11)	.750 (19.05)	.812 (20.62)	.750 (19.05)	1.043 (26.44) 1.003 (25.48)	.130 (3.30) .115 (2.92)	.758 (19.18)	Section 90
B (13)	.875 (22.22)	.937 (23.80)	.843 (21.41)	1.158 (29.41) 1.118 (28.40)	.130 (3.30) .115 (2.92)	.880 (22.35)	Section 10
C (15)	1.062 (26.97)	1.124 (28.55)	.968 (24.59)	1.278 (32.46) 1.238 (31.45)	.130 (3.30) .115 (2.92)	1.005 (25.53)	Section 20
D (17)	1.125 (28.58)	1.187 (30.15)	1.015 (25.78)	1.403 (35.64) 1.363 (34.62)	.130 (3.30) .115 (2.92)	1.130 (28.70)	Section 30
E (19)	1.312 (33.32)	1.374 (34.90)	1.140 (29.06)	1.528 (38.81) 1.488 (37.80)	.130 (3.30) .115 (2.92)	1.255 (31.88)	Section 40
F (23)	1.500 (38.10)	1.562 (39.67)	1.281 (32.54)	1.738 (44.15) 1.698 (43.13)	.130 (3.30) .115 (2.92)	1.443 (36.65)	Section 50
G (25)	1.625 (41.28)	1.687 (42.85)	1.392 (35.36)	1.838 (46.69) 1.798 (45.67)	.157 (3.99) .142 (3.61)	1.567 (39.80)	Section 60
H (29)	1.812 (46.02)	1.937 (49.20)	1.568 (39.83)	2.158 (54.81) 2.118 (53.80)	.157 (3.99) .142 (3.61)	1.880 (47.75)	Section 70
J (33)	2.000 (50.80)	2.124 (53.95)	1.734 (44.04)	2.348 (59.64) 2.308 (58.62)	.183 (4.65) .168 (4.27)	2.067 (52.50)	Section 80

NOTES

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents (to the Nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm.
4. Dimensions apply after plating.
5. Normal mating keyway position shown. For alternate keyway positions see MIL-C-28840
6. Connector shall be supplied with resilient wire separator in lieu of a wire seal grommet.

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Classes: D, DS

Insert Arrangement: See the section of MIL-STD-1698 corresponding to the desired shell size.

Contacts: Style P or S crimp type.


Shell polarization: 1 thru 6, key position

Marking: Part number on shell.

Mating counterpart: Plug connectors specified in MIL-C-28840/16,17,18,19,26,28 and 29

Installation and removal tool: As specified in MIL-I-81969/33 and /34

EXAMPLE OF PART NUMBER M28840 /12 A G 1 P 1

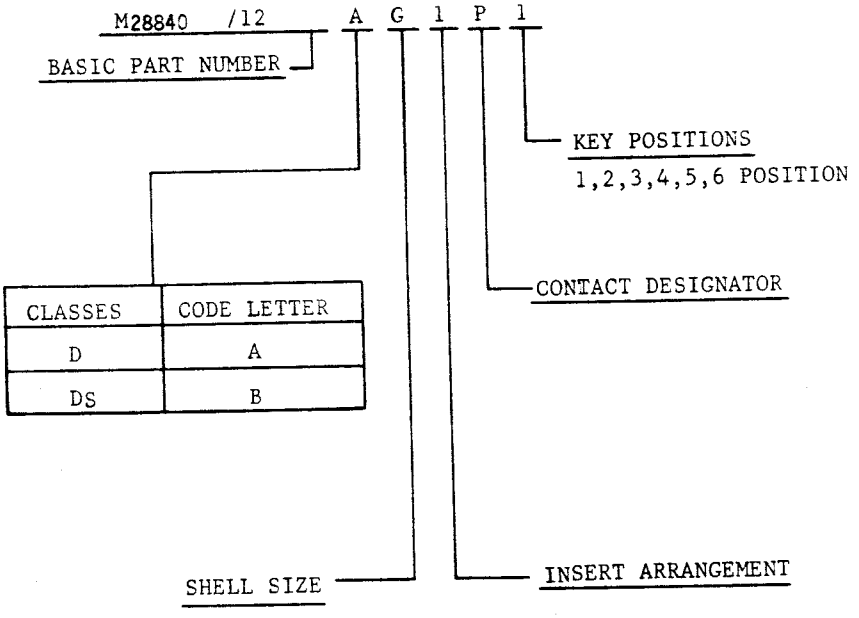

Prenaring activity:
Navy-EC
(Project 5935-N174-11)

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:37Z
Check the source to verify that this is the current version before use.