MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, COVER, RECEPTACLE

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840.

INCHES	MM
.025	0.64
.047	1.19
.057	1 45
.640	16.26
.650	16.51
.760	19.30
.780	19.81
5 00	127.00

INCHES	MM
01	.25
.03	76
.115	2.92
.88	22.35

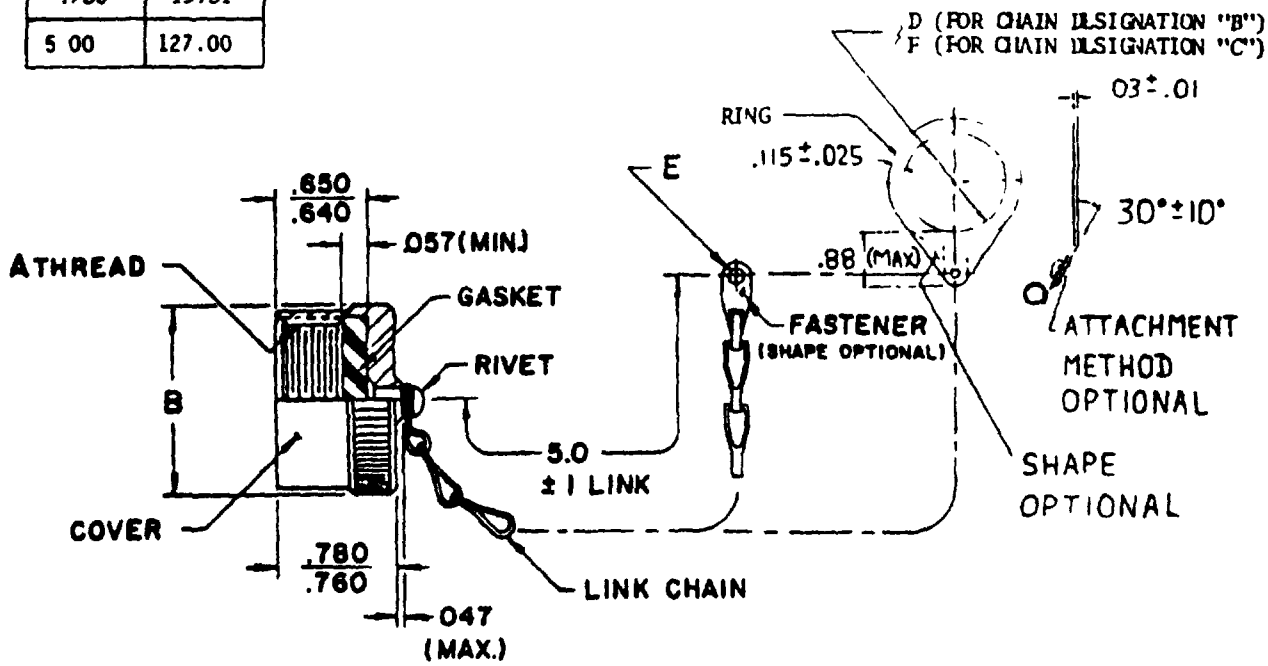

© FIGURE 1 Dimensions and configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

(C) TABLE I Dimensions and configuration

SHELL SIZE DESIGNATOR 1/	A THREAD CLASS 2B	B MAX DIA	D ±.010 (±0.25)	E ±.005 (±0.13)	F ± 010 (±0.25)
A (11)	750- 1P-.2L-DS	1 028 (26 21)	890 (22.61)	.130 (3.30)	765 (19.43)
B (13)	.875-.1P-.2L-DS	1.141 (28.98)	1.015 (25.78)		.890 (22.61)
C (15)	1.062-.1P-.2L-DS	1 263 (32 08)	1.203 (30.56)		1.015 (25 78)
D (17)	1 125-.1P-.2L-DS	1 387 (35 23)	1.265 (32.13)		1.140 (28.96)
E (19)	1 312- 1P- 2L-DS	1 513 (38 43)	1 453 (36 91)		1 265 (32.13)
F (23)	1.500- 1P-.2L-DS	1 703 (43.51)	1.640 (41 66)		1.453 (36.91)
G (25)	1 625- 1P-.2L-DS	1 825 (46 35)	1.765 (44 83)	.156 (3 96)	1 577 (40.06)
H (29)	1 812- 1P-.2L-DS	2 143 (54 43)	1.953 (49 61)		1.890 (48.01)
J (33)	2 000- 1P- 2L-DS	2 329 (59 16)	2 140 (54 36)	193 (4.90)	2.077 (52 76)

NOTES

1 Shell sizes are provided within parentheses for information and are not a part of the designator
2 Dimensions are in inches.
3 Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 0 inch equals 25.4 mm.
4 Dimensions apply after plating

REQUIREMENTS

Dimensions and configuration See FIGURE 1 and TABLE I
Interface dimensions shall conform to MIL-C-28840, FIGURE 5

MATERIAL

Cover Aluminum Alloy, in accordance with QQ-A-225, QQ-A-591 or QQ-A-601; or class 316 corrosion resistant steel in accordance with QQ-S-763

Gasket Fluorosilicone

Chain and other hardware 300 series corrosion resistant steel


FINISH

Cover Aluminum, shall be cadmium plate, olive drab over electroless nickel Corrosion resistant steel; cadmium plate, black.

Chain and other hardware Passivated in accordance with QQ-P-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

MARKING The cover shall be identified with the manufacturer's name or trademark and the part number The example of the part number is as follows

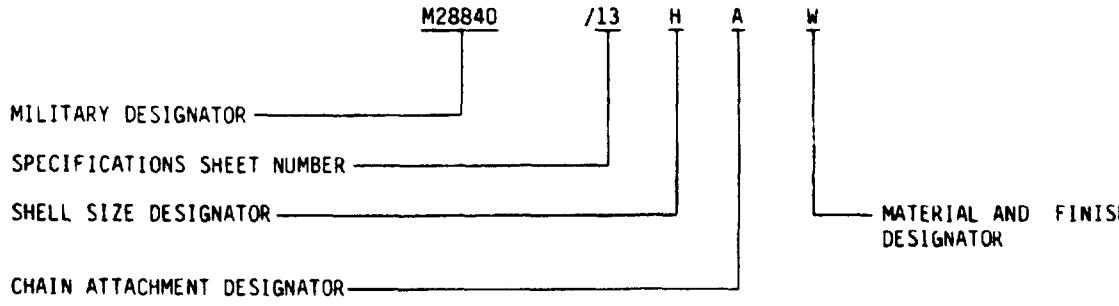

Ⓒ A - LINK CHAIN WITH FASTENER
B - LINK CHAIN WITH RING FOR JAM-NUT MOUNTING RECEPTACLE
C - LINK CHAIN WITH RING FOR CABLE-CONNECTING RECEPTACLE

W-ALUMINUM, CADMIUM PLATE, OLIVE DRAB OVER ELECTRO-LESS NICKEL
D-CORROSION RESISTANT STEEL CADMIUM PLATE, BLACK

Chain shall be free to rotate on rivet

Gasket shall be mechanically or chemically captive to the cover

QUALIFICATION

One protective cover of each shell size for which qualification is desired, shall have the following tests performed in the sequence shown

Visual and mechanical
Magnetic permeability
Shell conductivity
Corrosion
Air leakage. Cover shall be mated to suitable connector plug and tested in accordance with Method 1008 of MIL-STD-1344. The following details shall apply The air leakage rate shall not be greater than one atmospheric cubic inch per hour ($4.55X10^{-3}$ cubic centimeters per second.)
Tensile strength Cover shall be mounted to a suitable fixture to facilitate a 25 pound pull applied at the rate of 5 pounds per second and held for a period of 5 seconds. The load shall be applied to the chain end fastener through the center line axis of the protective cover, then repeated through a perpendicular axis (90°) from the center line axis. Chain or fastener breakage, or loosening of the rivet shall be considered failures
Shell conductivity
Post visual and mechanical

Review activity.
DESC - ES

Preparing activity
Navy - EC
(Project 5935-N232)

User activities
Navy - OS, SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28840/13C(EC)	CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, COVER, RECEPTACLE

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional

b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional

c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional

8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.