
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS RECEPTACLE, JAM NUT MOUNTING, CLASSES D AND DS

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of specification MIL-C-28840.

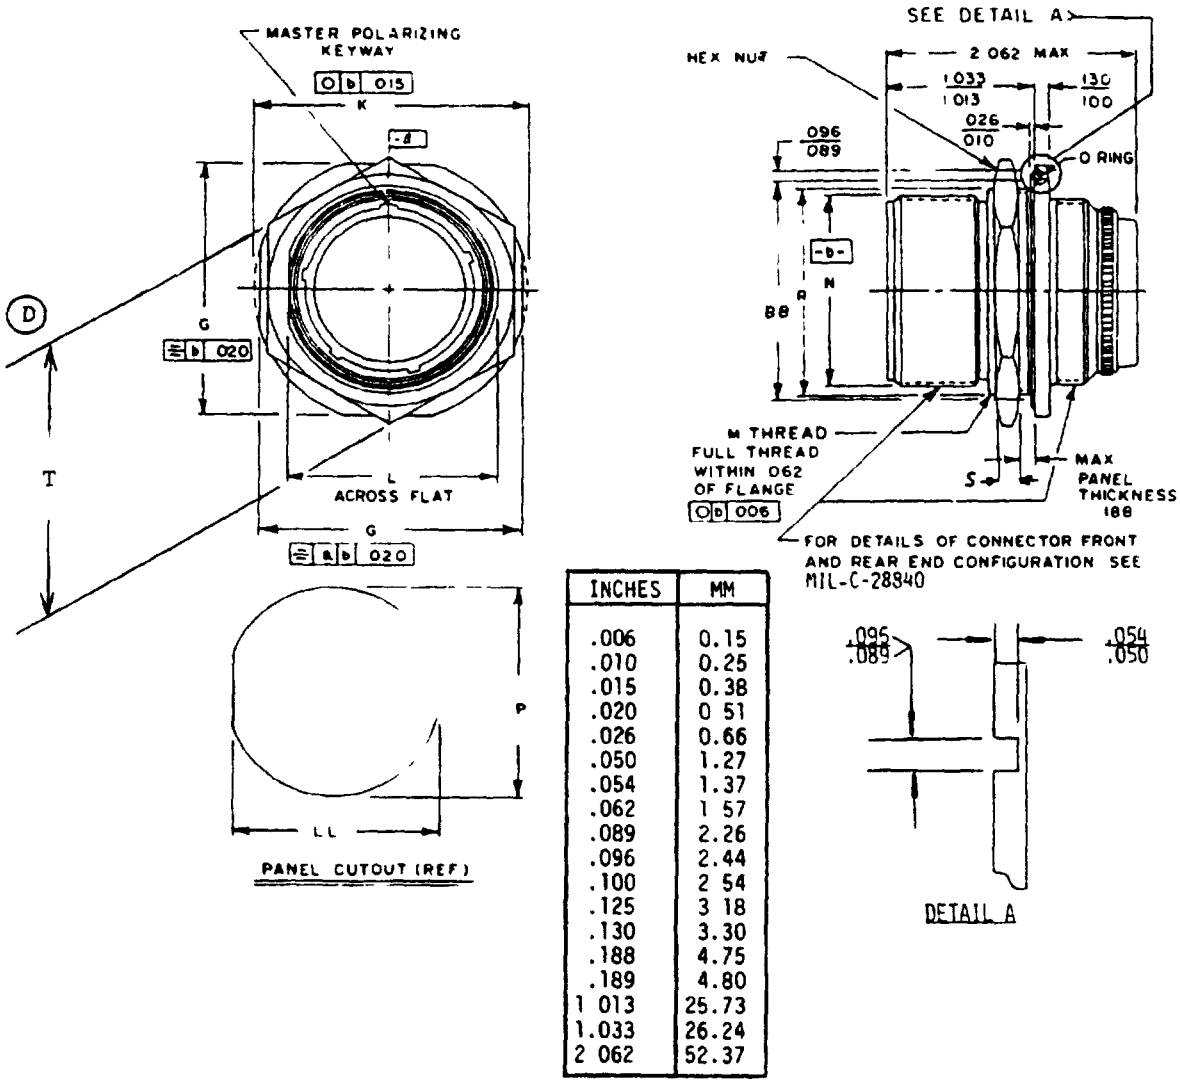

INCHES	MM
.006	0.15
.010	0.25
.015	0.38
.020	0 51
.026	0.66
.050	1.27
.054	1.37
.062	1 57
.089	2.26
.096	2.44
.100	2 54
.125	3 18
.130	3.30
.188	4.75
.189	4.80
1 013	25.73
1.033	26.24
2 062	52.37

FIGURE 1. Dimensions and configuration

(D) Denotes change

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:38Z
Check the source to verify that this is the current version before use.

FSC 5935

TABLE I Dimensions and configuration

DESIGNATOR 1/	G	K	L ACROSS FLAT	M THREAD CLASS 2A	N MAX	P	R MAX	S HEX NUT THICKNESS	T ± 017	BB	CC	FOR INSERT ARRANGEMENT MIL-STD-1698
A (11)	1 274 (32 36) 1 254 (31 85)	1 368 (34 75) 1 348 (34 24)	841 (21 36) 832 (21 13)	7/8-20 UNEF	750 (19 05)	890 (22 61) 880 (22 35)	875 (22 22)	125	1 062	979 (24 87) 969 (24 61)	853 (21 67) 843 (21 41)	Section 90
B (13)	1 399 (35 53) 1 379 (35 03)	1 508 (38 30) 1 488 (37 80)	966 (24 54) 957 (24 31)	1-20 UNEF	875 (22 22)	1 015 (25 78) 1 005 (25 53)	1 000 (25 40)	125	1 188	1 104 (28 04) 1 094 (27 79)	978 (24 84) 968 (24 59)	Section 10
C (15)	1 587 (40 31) 1 567 (39 80)	1 681 (42 70) 1 661 (42 19)	1 153 (29 29) 1 144 (29 06)	1 3/16-18 UNEF	1 062 (26 97)	1 203 (30 56) 1 193 (30 30)	1 188 (30 18)	125	1 375	1 292 (32 82) 1 282 (32 56)	1 165 (29 59) 1 155 (29 34)	Section 20
D (17)	1 649 (41 88) 1 629 (41 38)	1 743 (44 27) 1 723 (43 76)	1 216 (30 89) 1 207 (30 66)	1 1/4-18 UNEF	1 125 (28 58)	1 265 (32 13) 1 255 (31 88)	1 250 (31 75)	125	1 438	1 354 (34 39) 1 344 (34 14)	1 228 (31 19) 1 218 (30 94)	Section 30
E (19)	1 837 (46 66) 1 817 (46 15)	1 931 (49 05) 1 911 (48 54)	1 403 (35 64) 1 394 (35 41)	1 7/16-18 UNEF	1 312 (33 32)	1 453 (36 91) 1 443 (36 65)	1 438 (36 52)	125	1 625	1 542 (39 17) 1 532 (38 91)	1 415 (35 94) 1 405 (35 69)	Section 40
F (23)	2 024 (51 41) 2 004 (50 90)	2 118 (53 80) 2 098 (53 29)	1 591 (40 41) 1 582 (40 18)	1 5/8-18 UNEF	1 500 (38 10)	1 640 (41 66) 1 630 (41 40)	1 625 (41 28)	125	1 812	1 729 (43 92) 1 719 (43 66)	1 603 (40 72) 1 593 (40 46)	Section 50
G (25)	2 149 (54 58) 2 129 (54 08)	2 243 (56 97) 2 223 (56 46)	1 716 (43 59) 1 707 (43 36)	1 3/4-18 UNS	1 625 (41 28)	1 765 (44 83) 1 755 (44 58)	1 750 (44 45)	189	2 000	1 854 (47 09) 1 844 (46 84)	1 728 (43 89) 1 718 (43 64)	Section 60
H (29)	2 337 (59 36) 2 317 (58 85)	2 435 (61 85) 2 415 (61 34)	1 903 (48 34) 1 894 (48 11)	1 15/16-16 N	1 812 (46 02)	1 953 (49 61) 1 943 (49 35)	1 938 (49 22)	189	2 188	2 042 (51 87) 2 032 (51 61)	1 915 (48 64) 1 905 (48 39)	Section 70
J (33)	2 524 (64 11) 2 504 (63 60)	2 618 (66 50) 2 598 (65 99)	2 091 (53 11) 2 082 (52 88)	2 1/8-16 UN	2 000 (50 80)	2 140 (54 36) 2 130 (54 10)	2 125 (53 98)	189	2 375	2 229 (56 62) 2 219 (56 36)	2 103 (53 42) 2 093 (53 16)	Section 80

NOTES

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 0 inch equals 25.4 mm.
4. Dimensions apply after plating
5. Normal mating keyway position shown. For alternate keyway positions see MIL-C-28840, FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T19:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See FIGURE 1 and TABLE I.

Classes. D and DS

Insert Arrangement: See the section of MIL-STD-1698 corresponding to desired shell size.

Contacts. Style P or S Crimp type

Shell polarization: 1 thru 6, Key position

Marking: Part number on shell.

Mating counterpart. Plug connectors specified in MIL-C-28840/16,/17,/18,/19,/26,/28, and/29


Installation and removal tool: As specified in MIL-I-81969/33 and /34

Mounting nuts shall have six equally spaced holes capable of withstanding a 50 pound pull in any direction when using the .030 inch minimum diameter wire specified in MS33540.

A backshell shall be used to meet moisture and water pressure requirements.

O-ring material. Fluorosilicone

EXAMPLE OF PART NUMBER M28840 /14 A G 1 P 1

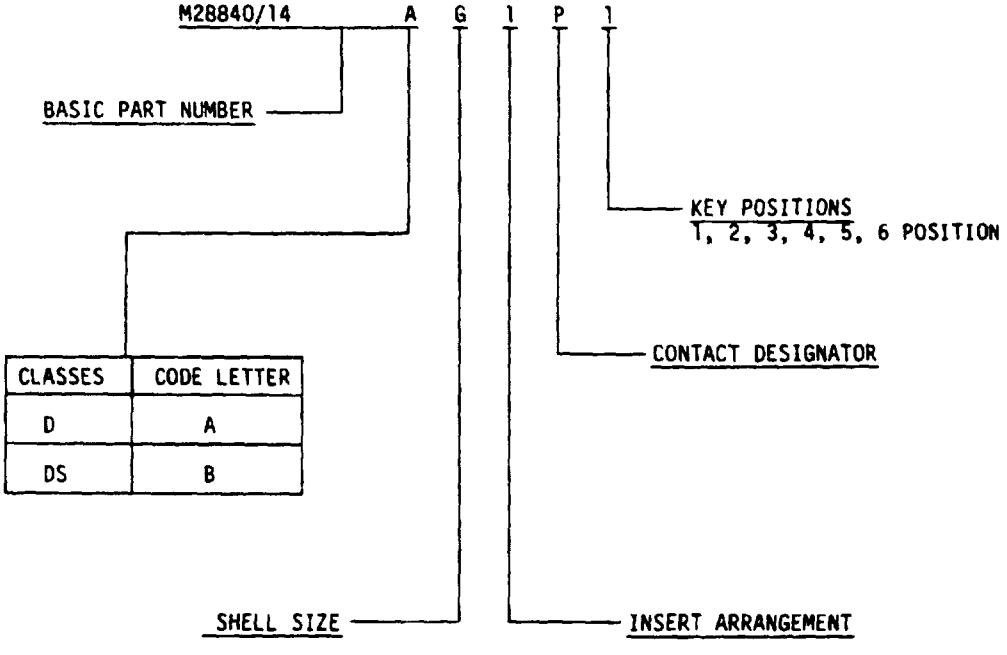

CLASSES	CODE LETTER
D	A
DS	B

User activities
Navy - OS, SH

Preparing activity:
Navy - EC
(Project 5935-N239-2)

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-04-20T19:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28840/14D(EC)	Connectors, Electrical, Circular, Screw Threads, High Density, High Shock, Shipboard, Crimp Contacts Receptacle, Jam Nut Mounting, Classes D and DS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-04-20T19:38Z
Check the source to verify that this is the current version before use.