INCH-POUND

MIL-DTL-28840/14E
20 April 2004
SUPERSEDING
MIL-C-28840/14D(EC)
20 September 1983

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CRIMP CONTACTS, RECEPTACLE, JAM NUT MOUNTING, CLASSES D AND DS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

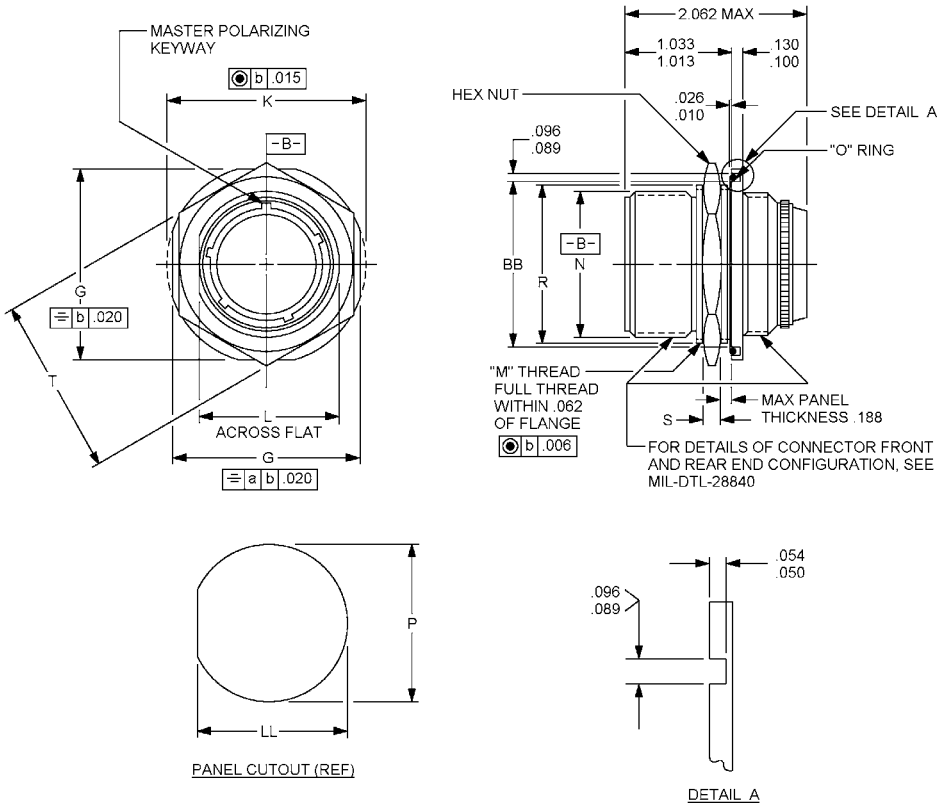


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Inches	mm
.006	0.15
.010	0.25
.015	0.38
.020	0.51
.026	0.66
.050	1.27
.054	1.37
.062	1.57
.089	2.26
.096	2.44
.100	2.54
.125	3.18
.130	3.30
.188	4.75
.189	4.80
1.013	25.73
1.033	26.24
2.062	52.37

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	G	K	L across flat	M thread class 2A	For insert arrangement MIL-STD-1698
A (11)	1.274 (32.36) 1.254 (31.85)	1.368 (34.75) 1.348 (34.24)	.841 (21.36) .832 (21.13)	7/8-20 UNEF	Section 90
B (13)	1.399 (35.53) 1.379 (35.03)	1.508 (38.30) 1.488 (37.80)	.966 (24.54) .957 (24.31)	1-20 UNEF	Section 10
C (15)	1.587 (40.31) 1.567 (39.80)	1.681 (42.70) 1.661 (42.19)	1.153 (29.29) 1.44 (29.06)	1 3/16-18 UNEF	Section 20
D (17)	1.649 (41.88) 1.629 (41.38)	1.743 (44.27) 1.723 (43.76)	1.216 (30.89) 1.207 (30.66)	1 ¼-18 UNEF	Section 30
E (19)	1.837 (46.66) 1.817 (46.15)	1.931 (49.05) 1.911 (48.54)	1.403 (35.64) 1.394 (35.41)	1 7/16-18 UNEF	Section 40
F (23)	2.024 (51.41) 2.004 (50.90)	2.118 (53.80) 2.098 (53.29)	1.591 (40.41) 1.582 (40.18)	1 5/8-18 UNEF	Section 50
G (25)	2.149 (54.58) 2.129 (54.08)	2.243 (56.97) 2.223 (56.46)	1.716 (43.59) 1.707 (43.36)	1 ¾-18 UNS	Section 60
H (29)	2.337 (59.36) 2.317 (58.85)	2.435 (61.85) 2.415 (61.34)	1.903 (48.34) 1.894 (48.11)	115/16-16 N	Section 70
J (33)	2.524 (64.11) 2.504 (63.60)	2.618 (66.50) 2.598 (65.99)	2.091 (53.11) 2.082 (52.88)	2 1/8-16 UN	Section 80

See notes at end of figure.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	N max	P	R max	S hex nut thickness	For insert arrangement MIL-STD-1698
A (11)	.750(19.05)	890 (22.61) 880 (22.35)	.875 (22.22)	.125	Section 90
B (13)	.875 (22.22)	1.015 (24.78) 1.005 (25.53)	1.000 (25.40)	.125	Section 10
C (15)	1.062 (26.97)	1.203 (30.56) 1.193 (30.30)	1.188 (30.18)	.125	Section 20
D (17)	1.125 (28.58)	1.265 (32.13) 1.255 (31.88)	1.250 (31.75)	.125	Section 30
E (19)	1.312 (33.32)	1.453 (36.91) 1.443 (36.65)	1.438 (36.52)	.125	Section 40
F (23)	1.500 (38.10)	1.640 (41.66) 1.630 (41.40)	1.625 (41.28)	.125	Section 50
G (25)	1.625 (41.28)	1.765 (44.83) 1.755 (44.58)	1.750 (44.45)	.189	Section 60
H (29)	1.812 (46.02)	1.953 (49.61) 1.943 (49.35)	1.938 (49.22)	.189	Section 70
J (33)	2.000 (50.80)	2.140 (54.36) 2.130 (54.10)	2.125 (53.98)	.189	Section 80

See notes at end of figure.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	T ± .017	BB	LL	For insert arrangement MIL-STD-1698
A (11)	1.062	.979 (24.87) .969 (24.61)	.853 (21.67) .843 (21.41)	Section 90
B (13)	1.188	1.104 (28.04) 1.094 (27.79)	.978 (24.84) .968 (24.59)	Section 10
C (15)	1.375	1.292 (32.82) 1.282 (32.56)	1.165 (29.59) 1.155 (29.34)	Section 20
D (17)	1.438	1.354 (34.39) 1.344 (34.14)	1.228 (31.19) 1.218 (30.94)	Section 30
E (19)	1.625	1.542 (39.17) 1.532 (38.91)	1.415 (35.94) 1.405 (35.69)	Section 40
F (23)	1.812	1.729 (43.92) 1.719 (43.66)	1.603 (40.72) 1.593 (40.46)	Section 50
G (25)	2.000	1.854 (47.09) 1.844 (46.84)	1.728 (43.89) 1.718 (43.64)	Section 60
H (29)	2.188	2.042 (51.87) 2.032 (51.61)	1.915 (48.64) 1.905 (48.39)	Section 70
J (33)	2.375	2.229 (56.62) 2.219 (56.36)	2.103 (53.42) 2.093 (53.16)	Section 80

NOTES:
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only.
4. Dimensions apply after plating.
5. Normal mating keyway position shown. For alternate keyway positions see MIL-DTL-28840.

FIGURE 1. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.
Classes: D and DS.
Insert arrangement: See MIL-STD-1698 corresponding to desired shell size.
Contacts: Style P or S crimp type.
Shell polarization: 1 thru 6, key position.
Mating counterpart: Plug connectors specified in MIL-DTL-28840/16, 17, 18, 19, 26, 28, and 29.
Installation and removal tool: As specified in MIL-I-81969/33 and /34.
Mounting nuts shall have six equally spaced holes capable of withstanding a 50 pound pull in any direction when using the .030 inch minimum diameter wire specified in NASM 33540.
A backshell shall be used to meet moisture and water pressure requirement.
O-ring material: Fluorosilicone.

Marking: The cover shall be identified with the manufacturer's name or trademark and the Part or Identifying Number (PIN).

PIN example:

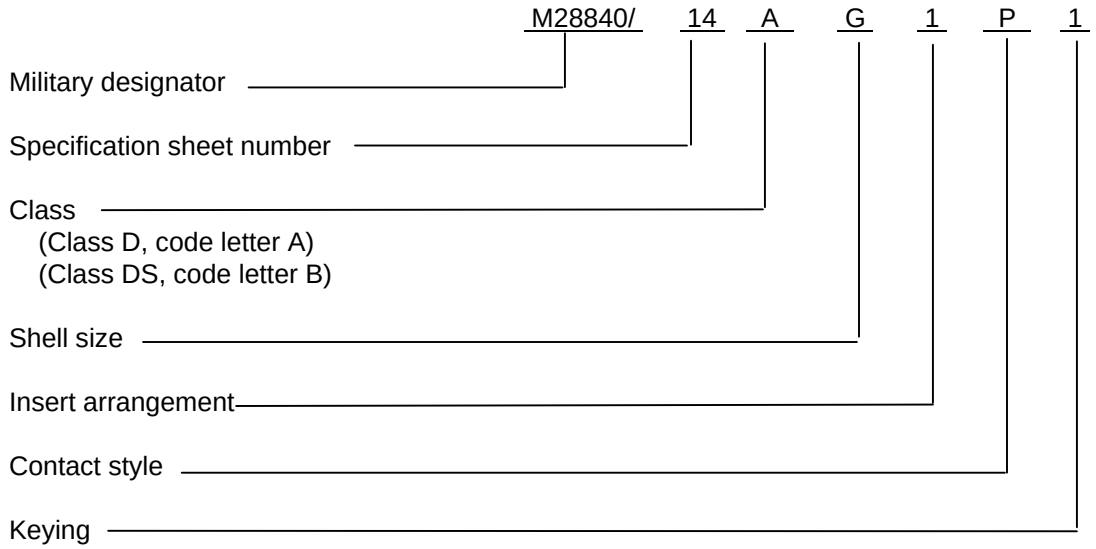

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16	MIL-I-81969/33
MIL-DTL-28840/17	MIL-I-81969/34
MIL-DTL-28840/18	MIL-STD-1698
MIL-DTL-28840/19	NASM 33540
MIL-DTL-28840/26	
MIL-DTL-28840/28	
MIL-DTL-28840/29	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy – EC
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-4416-009)

Review activities:
Navy – OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.