INCH-POUND

MIL-DTL-28840/14F
23 October 2009
SUPERSEDING
MIL-DTL-28840/14E
20 April 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, CRIMP CONTACTS, RECEPTACLE, JAM NUT MOUNTING, CLASSES D, DS, P, T AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

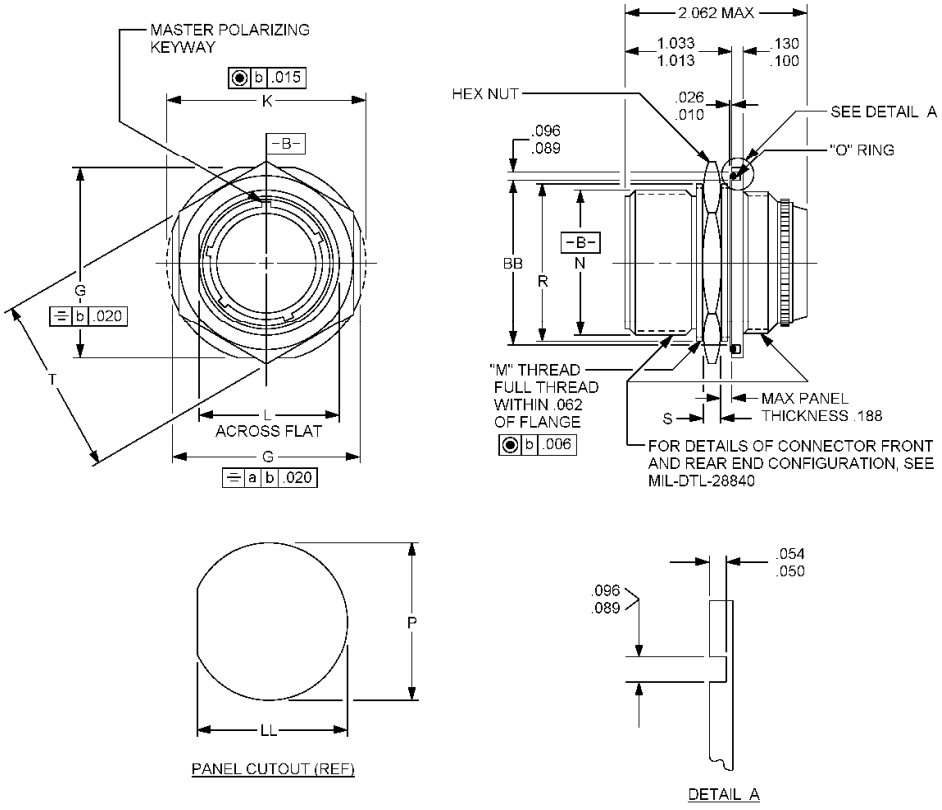


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Inches	mm
.006	0.15
.010	0.25
.015	0.38
.020	0.51
.026	0.66
.050	1.27
.054	1.37
.062	1.57
.089	2.26
.096	2.44
.100	2.54
.125	3.18
.130	3.30
.188	4.75
.189	4.80
1.013	25.73
1.033	26.24
2.062	52.37

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	G	K	L across flat	M thread class 2A	Insert arrangement (see MIL-STD-1698)
A (11)	1.274 (32.36) 1.254 (31.85)	1.368 (34.75) 1.348 (34.24)	.841 (21.36) .832 (21.13)	7/8-20 UNEF	Section 90
B (13)	1.399 (35.53) 1.379 (35.03)	1.508 (38.30) 1.488 (37.80)	.966 (24.54) .957 (24.31)	1-20 UNEF	Section 10
C (15)	1.587 (40.31) 1.567 (39.80)	1.681 (42.70) 1.661 (42.19)	1.153 (29.29) 1.44 (29.06)	1 3/16-18 UNEF	Section 20
D (17)	1.649 (41.88) 1.629 (41.38)	1.743 (44.27) 1.723 (43.76)	1.216 (30.89) 1.207 (30.66)	1 ¼-18 UNEF	Section 30
E (19)	1.837 (46.66) 1.817 (46.15)	1.931 (49.05) 1.911 (48.54)	1.403 (35.64) 1.394 (35.41)	1 7/16-18 UNEF	Section 40
F (23)	2.024 (51.41) 2.004 (50.90)	2.118 (53.80) 2.098 (53.29)	1.591 (40.41) 1.582 (40.18)	1 5/8-18 UNEF	Section 50
G (25)	2.149 (54.58) 2.129 (54.08)	2.243 (56.97) 2.223 (56.46)	1.716 (43.59) 1.707 (43.36)	1 ¾-18 UNS	Section 60
H (29)	2.337 (59.36) 2.317 (58.85)	2.435 (61.85) 2.415 (61.34)	1.903 (48.34) 1.894 (48.11)	115/16-16 N	Section 70
J (33)	2.524 (64.11) 2.504 (63.60)	2.618 (66.50) 2.598 (65.99)	2.091 (53.11) 2.082 (52.88)	2 1/8-16 UN	Section 80

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	N max	P	R max	S hex nut thickness	Insert arrangement (see MIL-STD-1698)
A (11)	.750(19.05)	890 (22.61) 880 (22.35)	.875 (22.22)	.125	Section 90
B (13)	.875 (22.22)	1.015 (24.78) 1.005 (25.53)	1.000 (25.40)	.125	Section 10
C (15)	1.062 (26.97)	1.203 (30.56) 1.193 (30.30)	1.188 (30.18)	.125	Section 20
D (17)	1.125 (28.58)	1.265 (32.13) 1.255 (31.88)	1.250 (31.75)	.125	Section 30
E (19)	1.312 (33.32)	1.453 (36.91) 1.443 (36.65)	1.438 (36.52)	.125	Section 40
F (23)	1.500 (38.10)	1.640 (41.66) 1.630 (41.40)	1.625 (41.28)	.125	Section 50
G (25)	1.625 (41.28)	1.765 (44.83) 1.755 (44.58)	1.750 (44.45)	.189	Section 60
H (29)	1.812 (46.02)	1.953 (49.61) 1.943 (49.35)	1.938 (49.22)	.189	Section 70
J (33)	2.000 (50.80)	2.140 (54.36) 2.130 (54.10)	2.125 (53.98)	.189	Section 80

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Designator (see note 1)	T ± .017	BB	LL	Insert arrangement (see MIL-STD-1698)
A (11)	1.062	.979 (24.87) .969 (24.61)	.853 (21.67) .843 (21.41)	Section 90
B (13)	1.188	1.104 (28.04) 1.094 (27.79)	.978 (24.84) .968 (24.59)	Section 10
C (15)	1.375	1.292 (32.82) 1.282 (32.56)	1.165 (29.59) 1.155 (29.34)	Section 20
D (17)	1.438	1.354 (34.39) 1.344 (34.14)	1.228 (31.19) 1.218 (30.94)	Section 30
E (19)	1.625	1.542 (39.17) 1.532 (38.91)	1.415 (35.94) 1.405 (35.69)	Section 40
F (23)	1.812	1.729 (43.92) 1.719 (43.66)	1.603 (40.72) 1.593 (40.46)	Section 50
G (25)	2.000	1.854 (47.09) 1.844 (46.84)	1.728 (43.89) 1.718 (43.64)	Section 60
H (29)	2.188	2.042 (51.87) 2.032 (51.61)	1.915 (48.64) 1.905 (48.39)	Section 70
J (33)	2.375	2.229 (56.62) 2.219 (56.36)	2.103 (53.42) 2.093 (53.16)	Section 80

NOTES:
1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for information only.
4. Dimensions apply after plating.
5. Normal mating keyway position shown. For alternate keyway positions, see MIL-DTL-28840.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Classes: D, DS, P, T and Z.

Insert arrangement: See MIL-STD-1698 corresponding to desired shell size.

Contacts: Style P or S crimp type.

Shell polarization: 1 thru 6, key position.
Mating counterpart: Plug connectors specified in MIL-DTL-28840/16, /17, /18, /19, /26, /28, and /29.


Installation and removal tool: As specified in MIL-I-81969/33 and /34.

Mounting nuts shall have six equally spaced holes capable of withstanding a 50 pound pull in any direction when using the .030 inch minimum diameter wire specified in NASM 33540.

A backshell shall be used to meet moisture and water pressure requirement.
O-ring material: Fluorosilicone.

Marking: The cover shall be identified with the manufacturer's name or trademark and the Part or Identifying Number (PIN).

PIN example:

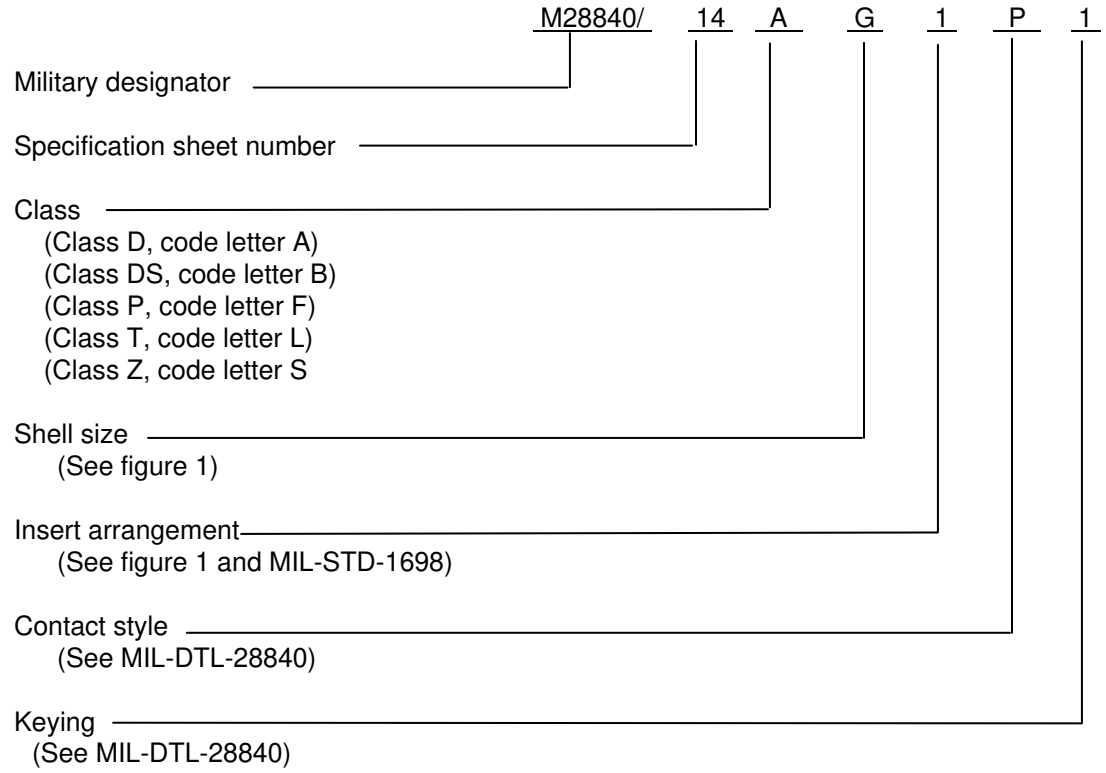

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/16
MIL-DTL-28840/17
MIL-DTL-28840/18
MIL-DTL-28840/19
MIL-DTL-28840/26
MIL-DTL-28840/28
MIL-DTL-28840/29
MIL-I-81969/33
MIL-I-81969/34
MIL-STD-1698
NASM 33540

CONCLUDING MATERIAL

Custodians:
Navy – EC
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2007-226)

Review activities:
Navy – OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:38Z
Check the source to verify that this is the current version before use.