INCH-POUND

MIL-DTL-28840/16B
26 April 2007
SUPERSEDING
MIL-C-28840/16A(EC)
26 May 1981

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS, PLUG, CLASSES D AND DS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

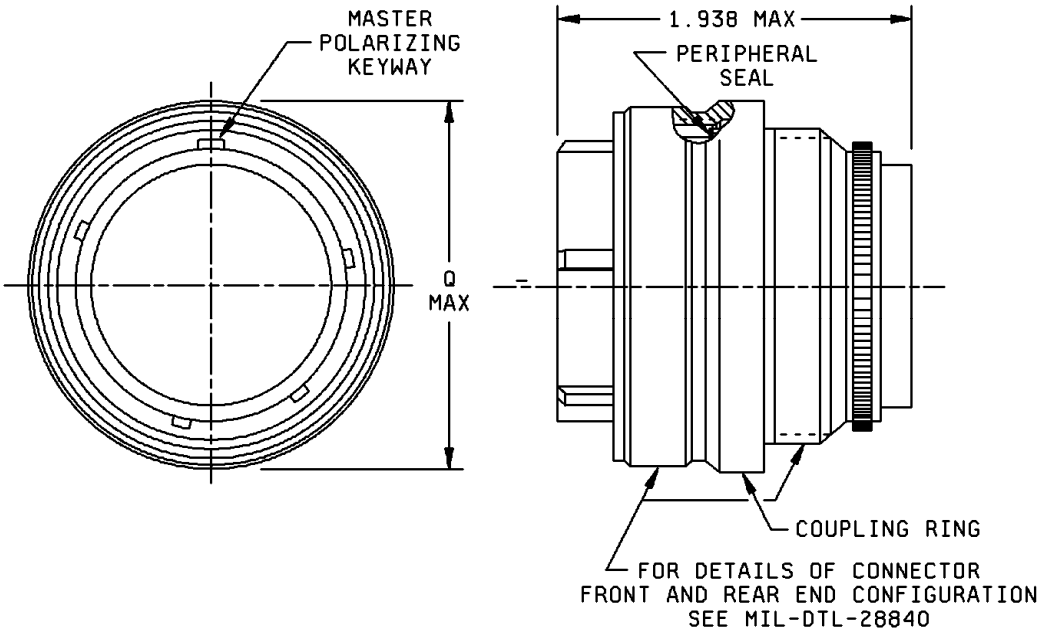

Inches	mm
1.938	49.24

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:39Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Q dia max	For insert arrangement, see MIL-STD-1698
A (11)	1.028 (26.11)	Section 90
B (13)	1.141 (28.98)	Section 10
C (15)	1.263 (32.08)	Section 20
D (17)	1.387 (35.23)	Section 30
E (19)	1.513 (38.43)	Section 40
F (23)	1.703 (43.26)	Section 50
G (25)	1.825 (46.36)	Section 60
H (29)	2.143 (54.43)	Section 70
J (33)	2.329 (59.16)	Section 80

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Shell sizes are provided within parentheses for information and are not a part of the designator.
4. Dimensions apply after plating.
5. Normal mating key position shown. Alternate key positions in accordance with MIL-DTL-28840.

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Classes: D and DS.
Insert Arrangements: In accordance with MIL-STD-1698 corresponding to desired shell size.
Contacts: Style P or S crimp type.
Shell polarization: 1 thru 6, key position.
Marking: Part or Identifying Number (PIN) on shell.
Mating counterpart: Receptacle connectors in accordance with MIL-DTL-28840/10, 11, 12, 14, 20, and 21.
Installation and removal tool: In accordance with MIL-I-81969/33 and /34.
A backshell shall be used to meet the moisture and water pressure requirements.

PIN example:

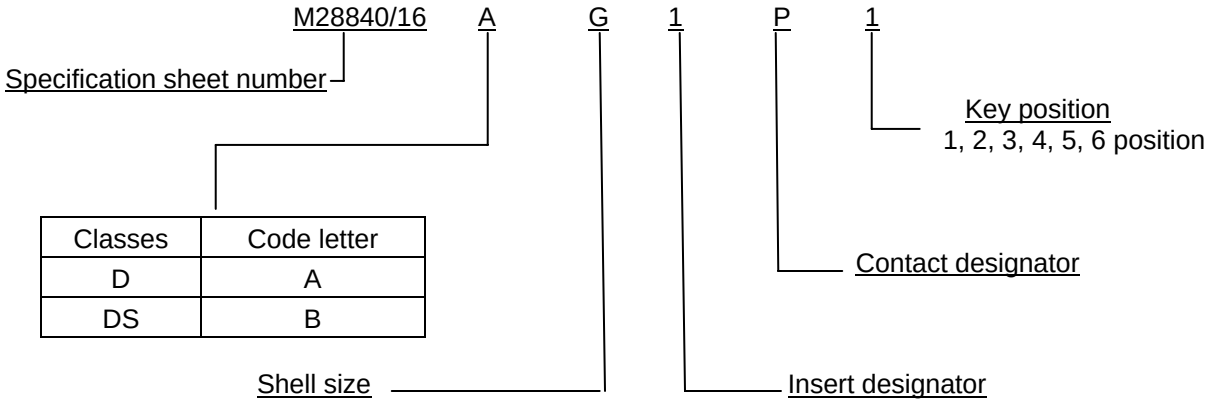

Classes	Code letter
D	A
DS	B

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/10
MIL-DTL-28840/11
MIL-DTL-28840/12
MIL-DTL-28840/14
MIL-DTL-28840/20
MIL-DTL-28840/21
MIL-I-81969/33
MIL-I-81969/34
MIL-STD-1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:39Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5935–2005-036)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:39Z
Check the source to verify that this is the current version before use.