MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS GASKET, FLANGE MOUNTING

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840.

INCHES	MM
.010	.25
.026	.66
.036	.91

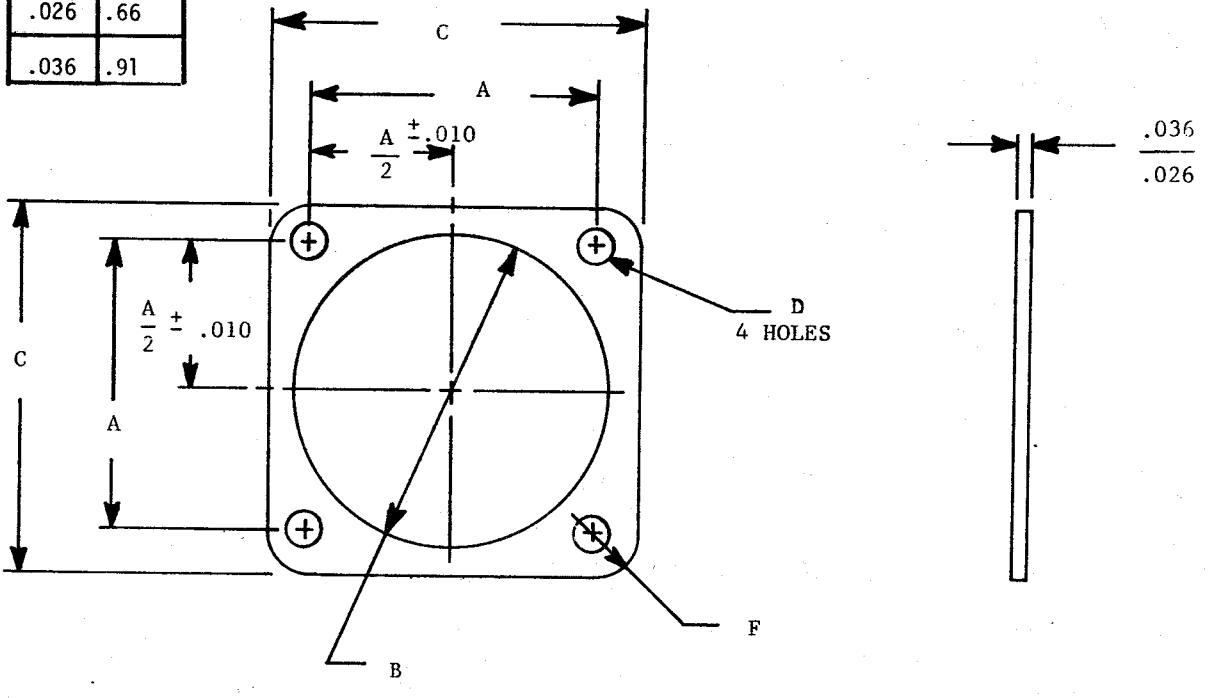


FIGURE 1. Dimensions and configuration

(B) Denotes change

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:43Z
Check the source to verify that this is the current version before use.

(B)

TABLE I. Dimensions and configuration

DESIGNATOR 1/	A	B DIA.	C	D DIA.	F RADIUS
A (11)	.760 (19.30) .740 (18.80)	.766 (19.46) .750 (19.05)	1.039 (26.39) 1.023 (25.98)	.130 (3.30) .110 (2.79)	.151 (3.84) .131 (3.33)
B (13)	.853 (21.67) .833 (21.16)	.891 (22.63) .875 (22.22)	1.154 (29.31) 1.138 (28.90)	.130 (3.30) .110 (2.79)	.151 (3.84) .131 (3.33)
C (15)	.978 (24.84) .958 (24.33)	1.078 (27.38) 1.062 (26.97)	1.274 (32.36) 1.258 (31.95)	.130 (3.30) .110 (2.79)	.151 (3.84) .131 (3.33)
D (17)	1.025 (26.04) 1.005 (25.53)	1.141 (28.98) 1.125 (28.58)	1.399 (35.53) 1.383 (35.13)	.130 (3.30) .110 (2.79)	.166 (4.22) .146 (3.71)
E (19)	1.150 (29.21) 1.130 (28.70)	1.338 (33.98) 1.312 (33.32)	1.524 (38.71) 1.508 (38.30)	.130 (3.30) .110 (2.79)	.182 (4.62) .162 (4.11)
F (23)	1.291 (32.79) 1.271 (32.28)	1.516 (38.51) 1.500 (38.10)	1.734 (44.04) 1.718 (43.64)	.130 (3.30) .110 (2.79)	.198 (5.03) .178 (4.52)
G (25)	1.402 (35.61) 1.382 (35.10)	1.641 (41.68) 1.625 (41.28)	1.834 (46.58) 1.818 (46.18)	.157 (3.99) .137 (3.48)	.198 (5.03) .178 (4.52)
H (29)	1.578 (40.08) 1.558 (39.57)	1.891 (48.03) 1.875 (47.62)	2.154 (54.71) 2.138 (54.30)	.157 (3.99) .137 (3.48)	.229 (5.82) .209 (5.31)
J (33)	1.744 (44.30) 1.724 (43.79)	2.078 (52.78) 2.062 (52.37)	2.344 (59.54) 2.328 (59.13)	.183 (4.65) .163 (4.14)	.229 (5.82) .209 (5.31)

NOTES

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents (to the Nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm.


REQUIREMENTS:

Dimensions and configuration: See figure and table 1.
Material:

A. Florinated silicone per MIL-R-25988 (50 Shore)
Color: Blue

B. EMI Shielding gasket- rubber per ZZR765 class 3, Grade 30 imbedded with monel wires per QQ-N-281

EXAMPLE OF PART NUMBER M28840/24GA

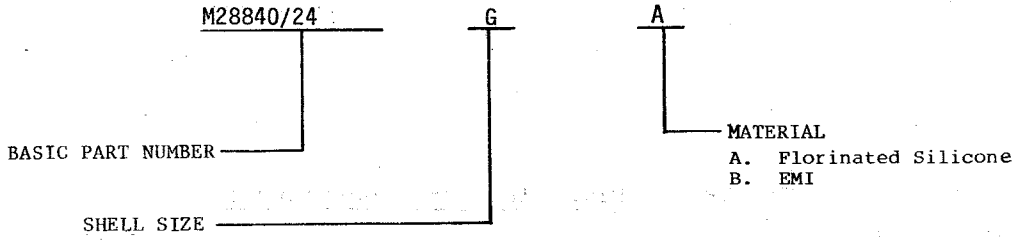

Review activities:
Navy - SH

User activities:
Navy - OS

Preparing activity:
NAVY-EC
(Project 5935- N174-23)

Source: https://assist.dla.mil -- Downloaded: 20260-20T19:43Z
Check the source to verify that this is the current version before use.