MIL-C-28840/25A(EC)
26 May 1981
SUPERSEDING
MIL-C-28840/25(EC)
21 August 1978

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, 90°, METAL CONDUIT FOR EMI SHIELDING

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of specification MIL-C-28840.

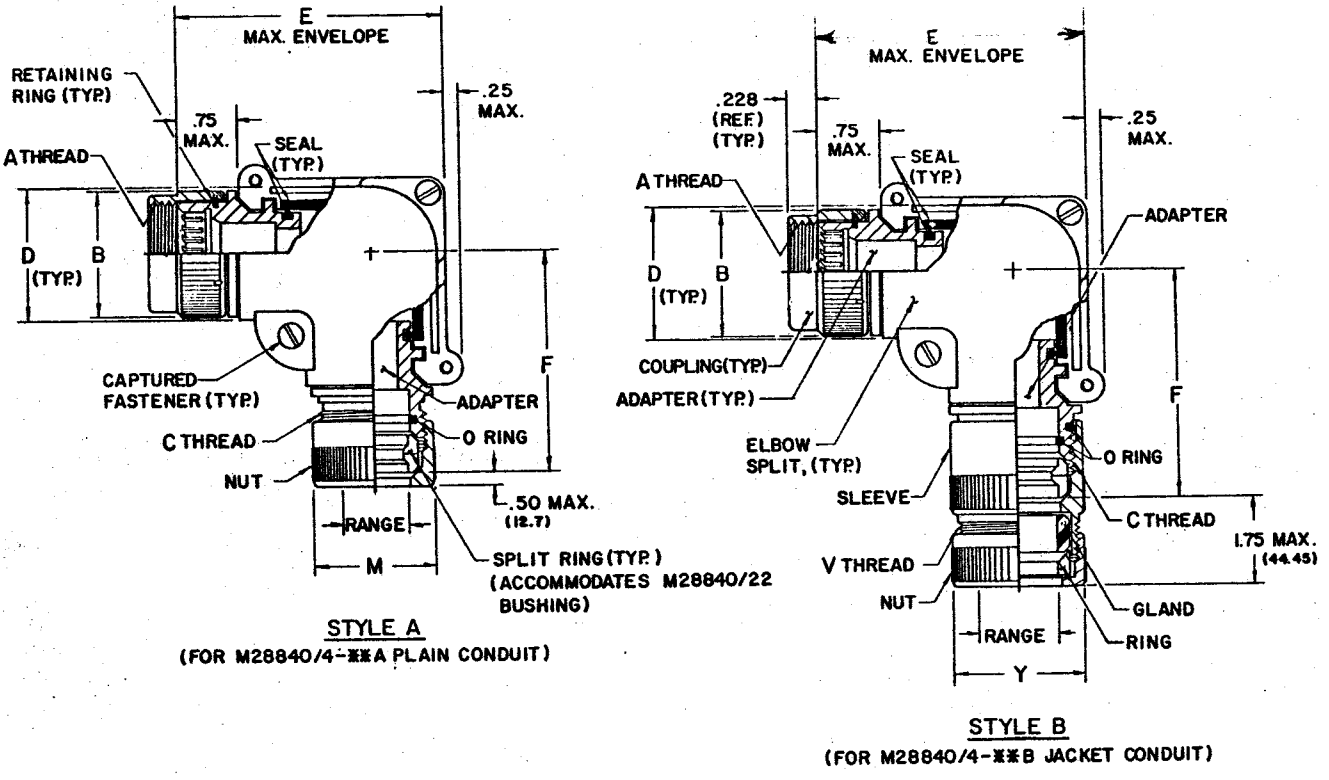


FIGURE 1. Dimensions and configuration

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:44Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration

DASH NO.	DESIGNATOR 1/	A THREAD CLASS 2B	B MAX. DIA.	C THREAD CLASS 2 *	D MAX. DIA.	SEALING RANGE MAX.	SEALING RANGE MIN.	CONDUIT SIZE M 04	E MAX. DIM.	F MAX. DIM.	V THREAD CLASS 2 *	M MAX. DIA.	Y MAX. DIA.
1	A (11)	.750-20UNEF	1.028 (16.11)	.875-20UNEF	1.031 (26.19)	.63 (16.0)	.50 (12.7)	03	2.36 (59.9)	3.50 (92.8)	1.000-20UNEF	1.12 (28.5)	1.19 (30.23)
2	B (13)	.875-20UNEF	1.141 (28.98)	.875-20UNEF		.63 (16.0)	.50 (12.7)	03			1.000-20UNEF	1.12 (28.5)	1.19 (30.23)
3				1.000-20UNEF		.75 (19.1)	.63 (16.0)	04			1.188-18UNEF	1.25 (31.8)	1.38 (35.1)
4	C (15)	1.000-20UNEF	1.263 (32.08)	.875-20UNEF	1.281 (32.54)	.63 (16.0)	.50 (12.7)	03	2.56 (65.0)	3.69 (97.9)	1.000-20UNEF	1.12 (28.5)	1.19 (30.23)
5				1.000-20UNEF		.75 (19.1)	.63 (16.0)	04			1.118-18UNEF	1.25 (31.8)	1.38 (35.1)
6				1.125-18UNEF		.88 (22.4)	.75 (19.1)	05			1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
7				1.250-18UNEF	1.531 (38.89)	1.00 (25.4)	.88 (22.4)	06	2.67 (67.8)	3.81 (101.0)	1.750-18UNS	1.62 (41.2)	1.94 (49.3)
8	D (17)	1.125-18UNEF	1.387 (35.23)	1.125-18UNEF		.88 (22.4)	.75 (19.1)	05			1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
9				1.250-18UNEF		1.00 (25.4)	.88 (22.4)	06			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
10				1.625-18UNEF		1.38 (35.1)	1.19 (30.2)	08			2.00-18UNS	1.81 (46.0)	2.19 (55.6)
11	E (19)	1.250-18UNEF	1.513 (38.43)	1.125-18UNEF		.88 (22.4)	.75 (19.1)	05			1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
12				1.250-18UNEF		1.00 (25.4)	.88 (22.4)	06			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
13				1.625-18UNEF	1.781 (45.24)	1.38 (35.1)	1.19 (30.2)	08	3.05 (77.5)	4.19 (111.1)	2.00-18UNS	1.81 (46.0)	2.19 (55.6)
14	F (23)	1.438-18UNEF	1.703 (45.51)	1.250-18UNEF		1.00 (25.4)	.88 (22.4)	06			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
15				1.625-18UNEF		1.38 (35.1)	1.19 (30.2)	08			2.00-18UNS	1.81 (46.0)	2.19 (55.6)
16				1.875-18UNS		1.63 (41.4)	1.44 (36.6)	10			2.250-18UN	2.18 (55.4)	2.44 (62.0)
17	G (25)	1.562-18UNEF	1.825 (46.35)	1.250-18UNEF		1.00 (25.4)	.88 (22.4)	06			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
18				1.625-18UNEF		1.38 (35.1)	1.19 (30.2)	08			2.00-18UN	1.81 (46.0)	2.19 (55.6)
19				1.875-18UNS		1.63 (41.4)	1.44 (36.6)	10			2.250-18UN	2.18 (55.4)	2.44 (62.0)
20	H (29)	1.875-16UN	2.143 (54.43)	2.125-16UN	2.031 (51.59)	1.88 (47.8)	1.63 (41.4)	12	3.33 (84.6)	4.50 (119.4)	2.500-16UN	2.56 (65.0)	2.69 (68.3)
21				1.875-18UNS		1.63 (41.4)	1.44 (36.6)	10			2.250-16UN	2.18 (55.4)	2.44 (62.0)
22				2.125-16UN		1.33 (47.8)	1.63 (41.4)	12			2.500-16UN	2.56 (65.0)	2.69 (68.3)
23	J (33)	2.062-16UNS	2.329 (59.16)	2.125-16UN	2.531 (64.29)	1.88 (47.8)	1.63 (41.4)	12	3.70 (94.0)	4.83 (128.1)	2.500-16UN	2.56 (65.0)	2.69 (68.3)
24				2.750-16UN		2.38 (60.5)	2.13 (54.1)	16			3.00-16UN	3.06 (77.8)	3.19 (81.0)
25	A (11)	.750-20UNEF	1.028 (16.11)	.875-20UNEF	1.031 (26.19)	.75 (19.05)	.63 (16.0)	04	2.36 (59.9)	3.50 (92.8)	1.188-18UNEF	1.25 (31.8)	1.38 (35.1)

NOTES

1. Shell sizes are provided within parentheses for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents (to the Nearest .01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm.
4. Dimensions apply after plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:44Z
Check the source to verify that this is the current version before use.


Requirements

Dimensions and configurations: See Figure 1 and Table I
Interface dimensions shall conform to MIL-C-28840, Figure 7

Material: Aluminum alloy in accordance with QQ-A-225, QQ-A-591, or QQ-A-601.
Corrosion resistant steel in accordance with QQ-S-793, class 316.
Elastomers, Silicone rubber in accordance with ZZ-R-765.

Finish: Aluminum components shall be cadmium plate, olive drab over electroless nickel. Corrosion resistant steel components shall be cadmium plate, black. (Screw, washers; passivate in accordance with QQ-P-35).

Marking: The backshell shall be identified with the manufacturer's name or trade-mark and the part number. The example of the part number is as follows:

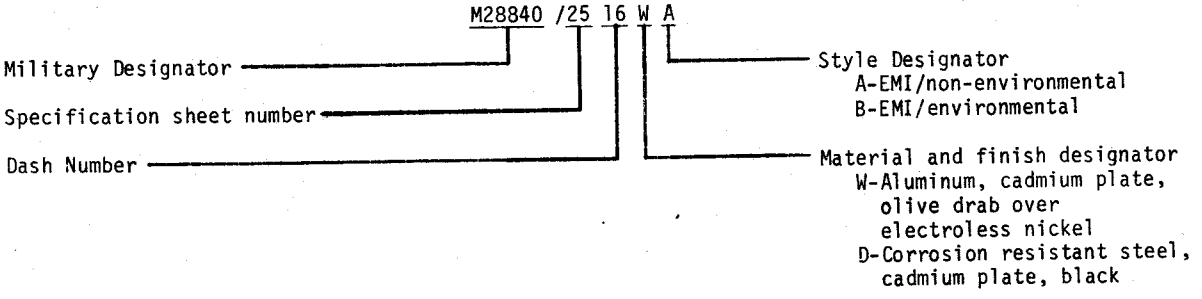

Qualification: Two samples in each shell size for which qualification is desired shall be tested in accordance MIL-C-28840, Table I, Groups 5 and 6.

Qualification of M28840/8 will qualify M28840/25 by similarity for group 5 tests.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - EC
(Project 5935-N174-24)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 0 — 703-023/5027

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:44Z
Check the source to verify that this is the current version before use.