INCH-POUND


MIL-DTL-28840/25B
20 April 2004
SUPERSEDING
MIL-C-28840/25A(EC)
26 May 1981

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, BACKSHELL, 90°, METAL CONDUIT FOR EMI SHIELDING

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

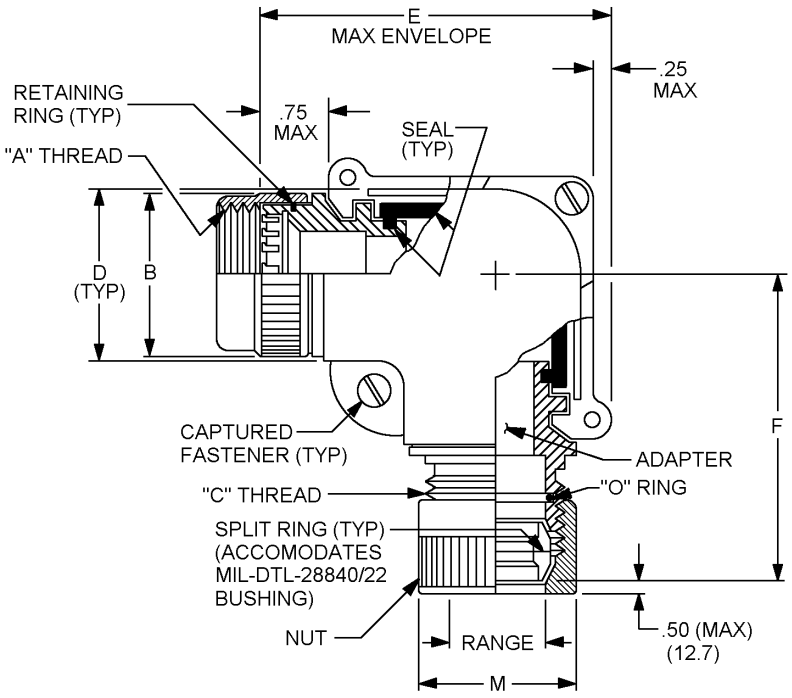

STYLE A
(FOR MIL-DTL-28840/4 - ** A PLAIN CONDUIT)

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

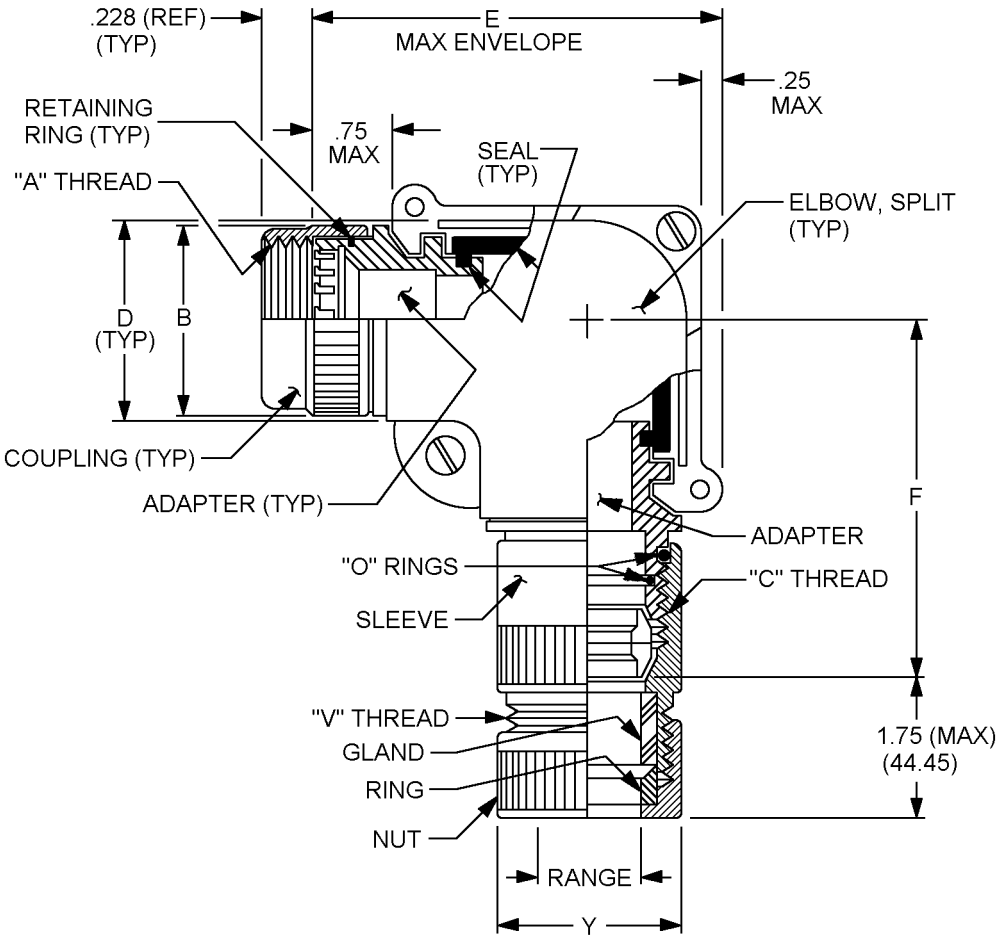

STYLE B
(FOR MIL-DTL-28840/4 - **B JACKET CONDUIT)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

Dash no.	Designator (see note 1)	A thread class 2B	B max dia	C thread class 1
1	A(11)	.750-20UNEF	1.028 (16.11)	.875-20UNEF
2	B(13)	.875-20UNEF	1.141 (28.98)	.875-20UNEF
3				1.000-20UNEF
4	C(15)	1.000-20UNEF	1.263 (32.08)	.875-20UNEF
5				1.000-20UNEF
6				1.125-18UNEF
7				1.250-18UNEF
8	D (17)	1.125-18UNEF	1.387 (35.43)	1.125-18UNEF
9				1.250-18UNEF
10				1.625-18UNEF
11	E (19)	1.250-18UNEF	1.513 (38.43)	1.125-18UNEF
12				1.250-18UNEF
13				1.625-18UNEF
14	F (23)	1.438-18UNEF	1.703 (45.51)	1.250-18UNEF
15				1.625-18UNEF
16				1.875-18UNS
17	G (25)	1.562-18UNEF	1.825 (46.35)	1.250-18UNEF
18				1.625-18UNEF
19				1.875-18UNS
20				2.125-16UN
21	H (29)	1.875-16un	2.143 (54.43)	1.875-18UNS
22				2.125-16UN
23	J(33)	2.062-16UNS	2.329 (59.16)	2-125-16UN
24				2.750-16UN
25	A (11)	.750-20UNEF	1.028 (16.19)	.875-20UNEF

See note at end of figure.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

Dash no.	Designator (see note 1)	D max dia	Sealing range		Conduit size M 04	E max. dim.
			Max	Min		
1	A(11)	1.031 (26.19)	.63 (16.0)	.50 (12.7)	03	2.36 (59.9)
2	B(13)		.63 (16.0)	.50 (12.7)	03	
3			.75 (19.1)	.63 (16.0)	04	
4	C(15)	1.281 (32.58)	.63 (16.0)	50 (12.7)	03	2.56 (65.0)
5			.75 (19.1)	.63 (16.0)	04	
6			.88 (22.4)	.75 (19.1)	05	
7		1.531 (38.89)	1.00 (25.4)	88 (22.4)	06	2.67 (67.8)
8	D (17)		.88 (22.4)	.75 (19.1)	05	
9			1.00 (25.4)	.88 (22.4)	06	
10			1.38 (35.1)	1.19 (30.2)	08	
11	E (19)		.88 (22.4)	.75 (19.1)	05	
12			1.00 (25.4)	.88 (22.4)	06	
13		1.781 (45.24)	1.38 (35.1)	1.19 (30.2)	08	3.05 (77.5)
14	F (23)		1.00 (25.4)	.88 (22.4)	06	
15			1.38 (35.1)	1.18 (30.2)	08	
16			1.63 (41.4)	1.44 (36.6)	10	
17	G (25)		1.00 (25.4)	.88 (22.4)	06	
18			1.38 (35.1)	1.19 (30.2)	08	
19			1.63 (41.4)	1.44 (36.5)	10	
20		2.031 (51.59)	1.88 (47.8)	1.63 (41.4)	12	3.33 (84.6)
21	H (29)		1.63 (41.4)	1.44 (36.6)	10	
22			1.33 (47.8)	1.63 (41.4)	12	
23	J (33)	2.531 (64.29)	1.88 (47.8)	1.63 (41.4)	12	3.70 (94.0)
24			2.38 (60.5)	2.13 (54.1)	16	
25	A (11)	1.031 (25.19)	.75 (19.5)	.63 (16.0)	04	2.36 (59.9)

See note at end of figure.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

Dash no.	Designator (see note 1)	F max dim	V thread class 2	M max dia	Y max dia
1	A(11)	3.50 (92.8)	1.000-20UNEF	1.12 (28.5)	1.19 (30.23)
2	B(13)		1.000-20UNEF	1.12 (28.5)	1.19 (30.23)
3			1.188-18UNEF	1.25 (31.8)	1.38 (35.1)
4	C(15)	3.69 (97.9)	1.000-20UNEF	1.12 (28.5)	1.39 (30.23)
5			1.118-18UNEF	1.25 (31.8)	1.38 (35.1)
6			1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
7		3.81 (101.0)	1.750-18UNS	1.62 (41.2)	1.94 (49.3)
8	D (17)		1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
9			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
10			2.00-18UNS	1.81 (46.0)	2.19 (55.6)
11	E (19)		1.438-18UNEF	1.43 (36.3)	1.63 (41.4)
12			1.750-18UNS	1.62 (41.2)	1.94 (49.3)
13		4.19 (111.1)	2.00-18UNS	1.81 (46.0)	2.19 (55.6)
14	F (23)		1.750-18UNS	1.62 (41.2)	1.94 (49.3)
15			2.00-18UNS	1.81 (46.0)	2.19 (55.6)
16			2.250-18UN	2.18 (55.4)	2.44 (62.0)
17	G (25)		1.750-18UNS	1.62 (41.2)	1.94 (49.3)
18			2.00-18UN	1.81 (46.0)	2.19 (55.6)
19			2.250-18UN	2.18 (55.4)	2.44 (62.0)
20		4.50 (119.4)	2.500-16UN	2.56 (65.0)	2.69 (68.5)
21	H (29)		2.250-16UN	2.18 (55.4)	2.18 (55.4)
22			1.500-16UN	2.56 (65.0)	2.44 (62.0)
23	I (33)	4.43 (128.1)	2.500-16UN	2.56 (65.0)	2.69 (68.3)
24			3.00-16UN	3.06 (77.8)	3.19 (81.0)
25	A (11)	3.50 (97.8)	1.133-18UNLF	1.25 (31.8)	1.38 (35.1)

NOTES:
1. Shell sizes are provided within parenthesis for information and are not a part of the designator.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only.
4. Dimensions apply after plating.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.


Interface dimensions shall conform to MIL-DTL-28840.

Material: Aluminum alloy in accordance with SAE-AMS-QQ-A-225, ASTM B85, ASTM B108, or ASTM B26/B26M.
Corrosion resistant steel shall be in accordance with SAE-AMS-QQ-S-763, class 316.
Elastomers, silicone rubber shall be in accordance with A-A-59588.

Finish: Aluminum components shall be cadmium plate, olive drab over electroless nickel.
Corrosion resistant steel components shall be cadmium plate, black. The screws and washers shall be passivate in accordance with SAE-AMS-QQ-P-35.

Marking: The backshell shall be identified with the manufacturer's name or trademark and the Part or Identifying Number (PIN).

PIN example:

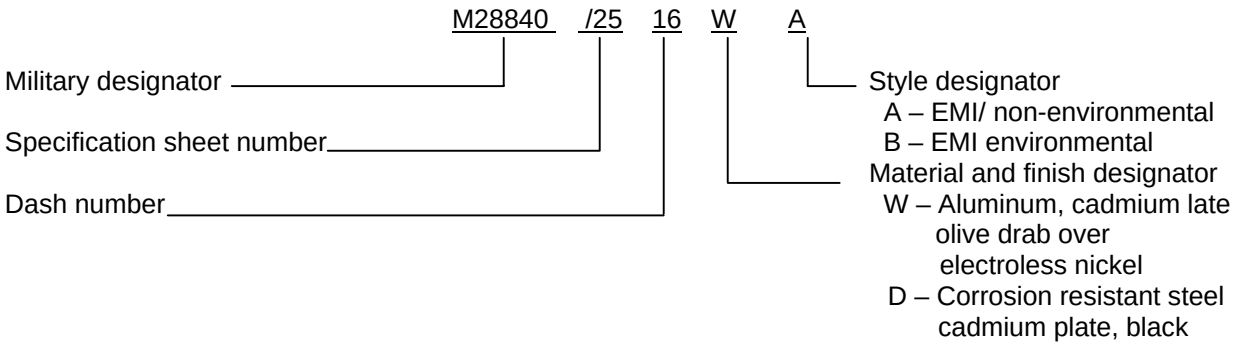

Qualification: Two samples in each shell size for which qualification is desired shall be tested in accordance MIL-DTL-28840.

Qualification of MIL-DTL-28840/8 will qualify MIL-DTL-28840/25 by similarity for group 5 tests.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL DTL-28840, this document references the following:

A-A-59588	MIL-DTL-28840/4	SAE-AMS-QQ-S-763
ASTM B85	MIL-DTL-28840/8	SAE-AMS-QQ-P-35
ASTM B108	MIL-DTL-28840/22	SAE-AMS-QQ-A-225
ASTM B26/B26M	MIL-DTL-28840/25	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4416-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at http://www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:43Z
Check the source to verify that this is the current version before use.