
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS, PLUG, ASSEMBLY, 90°, CLASSES DJ AND DJS

This specification is approved for use within Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this specification and the latest issue of specification MIL-C-28840.

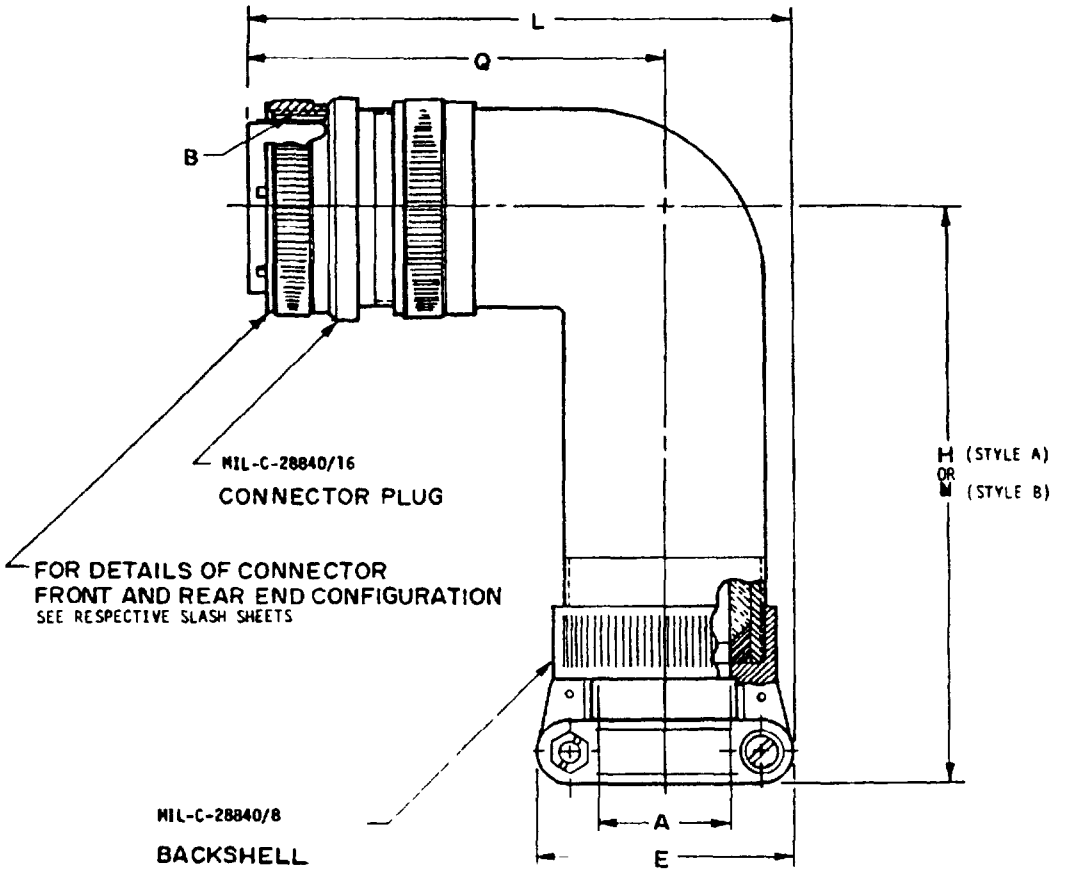

(D) Denotes change

(D) FIGURE 1. Dimensions and configuration.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Space and Naval Warfare Systems Command (SPAWAR-003-121), Washington, DC 20363-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration.

DESIG-NATOR[1/]	ASSEMBLY NO.[6/]	CONNECTOR PLUG NO.[6/]	BACKSHELL ASSEMBLY NO. NO.[6/]	A CABLE ENTRY MAX.	A CABLE ENTRY MIN.	B THREAD CLASS 2B	E REF	H MAX STY A	N MAX STY B	L MAX	Q MAX
A(11)	M28840/28*A*AA**	M28840/16*A***	M28840/801*A	.312 (7.92)	.188 (4.77)	.750-.1P -.2L-D.S.	.938 (23.82)	5.332 (135.43)	-	4.139 (105.13)	3.306 (83.97)
A(11)	M28840/28*A*AB**	M28840/16*A***	M28840/801*B					-	2.962 (75.23)		
A(11)	M28840/28*A*BA**	M28840/16*A***	M28840/824*A	.438 (11.13)	.281 (7.14)	.750-.1P -.2L-D.S.	1.125 (28.57)	5.332 (135.43)	-		3.306 (83.97)
A(11)	M28840/28*A*BB**	M28840/16*A***	M28840/824*B					-	2.962 (75.23)		
A(11)	M28840/28*A*CA**	M28840/16*A***	M28840/825*A	.562 (14.27)	.344 (8.74)	.750-.1P -.2L-D.S.	1.312 (33.32)	5.457 (138.61)	-	4.389 (111.48)	3.431 (87.15)
A(11)	M28840/28*A*CB**	M28840/16*A***	M28840/825*B					-	3.087 (78.41)		
B(13)	M28840/28*B*AA**	M28840/16*B***	M28840/802*A	.312 (7.92)	.188 (4.77)	.375-.1P .2L-D.S.	.938 (23.82)	5.332 (135.43)	-	4.139 (105.13)	3.306 (83.97)
B(13)	M28840/28*B*AB**	M28840/16*B***	M28840/802*B					-	2.962 (75.23)		
B(13)	M28840/28*B*BA**	M28840/16*B***	M28840/803*A	.438 (11.13)	.281 (7.14)	.875-.1P -.2L-D.S.	1.125 (28.57)	5.332 (135.43)	-	4.139 (105.13)	3.306 (83.97)
B(13)	M28840/28*B*BB**	M28840/16*B***	M28840/803*B					-	2.962 (75.23)		
B(13)	M28840/28*B*CA**	M28840/16*B***	M28840/826*A	.562 (14.27)	.344 (8.74)	.875-.1P -.2L-D.S.	1.312 (33.32)	5.457 (138.61)	-	4.389 (111.48)	3.431 (87.15)
B(13)	M28840/28*B*CB**	M28840/16*B***	M28840/826*B					-	3.087 (78.41)		
B(13)	M28840/28*B*DA**	M28840/16*B***	M28840/827*A	.625 (15.87)	.375 (9.52)	.875-.1P -.2L-D.S.	1.312 (33.32)	5.682 (144.32)	-	4.639 (117.83)	3.556 (90.32)
B(13)	M28840/28*B*DB**	M28840/16*B***	M28840/827*B					-	3.312 (84.12)		
C(15)	M28840/28*C*AA**	M28840/16*C***	M28840/805*A	.438 (11.13)	.281 (7.14)	1.062-.1P -.2L-D.S.	1.125 (28.57)	5.457 (138.61)	-	4.389 (111.48)	3.431 (87.15)
C(15)	M28840/28*C*AB**	M28840/16*C***	M28840/805*B					-	3.087 (78.41)		
C(15)	M28840/28*C*BA**	M28840/16*C***	M28840/806*A	.562 (14.27)	.344 (8.74)	1.062-.1P -.2L-D.S.	1.312 (33.32)	5.457 (138.61)	-		3.431 (87.15)
C(15)	M28840/28*C*BB**	M28840/16*C***	M28840/806*B					-	3.087 (78.41)		
C(15)	M28840/28*C*CA**	M28840/16*C***	M28840/828*A	.625 (15.87)	.375 (9.52)	1.062-.1P -.2L-D.S.	1.312 (33.32)	5.682 (144.32)	-	4.639 (117.83)	3.556 (90.32)
C(15)	M28840/28*C*CB**	M28840/16*C***	M28840/828*B					-	3.312 (84.12)		
C(15)	M28840/28*C*DA**	M28840/16*C***	M28840/807*A	.750 (19.05)	.438 (11.12)	1.062-.1P -.2L-D.S.	1.593 (40.46)	5.713 (145.11)	-		3.556 (90.32)
C(15)	M28840/28*C*DB**	M28840/16*C***	M28840/807*B					-	3.343 (84.91)		
C(15)	M28840/28*C*EA**	M28840/16*C***	M28840/804*A	.312 (7.92)	.188 (4.77)	1.062-.1P -2L-D.S.	.938 (23.82)	5.457 (138.61)	-	4.389 (111.48)	3.431 (87.15)
C(15)	M28840/28*C*EB**	M28840/16*C***	M28840/804*B					-	3.087 (78.41)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

(D) TABLE I. Dimensions and configuration (continued)

DESIGNATOR 1/	ASSEMBLY NUMBER 6/	CONNECTOR PLUG NO 6/	BACKSHELL 6/ ASSEMBLY NO	A CABLE ENTRY MAX	A CABLE ENTRY MIN	B THREAD CLASS 2B	E REF	H MAX STY A	N MAX STY B	L MAX	Q MAX
D(17)	M28840/28*D*AA**	M28840/16*D***	M28840/808*A	.625 (15 87)	.375 (9.52)	1 125-.1P - 2L-D S	1.312 (33 32)	5.682 (144 32)	-	4 639 (117 83)	3 356 (90 32)
D(17)	M28840/28*D*AB**	M28840/16*D***	M28840/808*B					-	3 312 (84 12)		
D(17)	M28840/28*D*BA**	M28840/16*D***	M28840/809*A	.750 (19 05)	.438 (11.12)	1 125- 1P -.2L-D S	1.593 (40 46)	5.713 (145 11)	-		3 556 (90 32)
D(17)	M28840/28*D*BB**	M28840/16*D***	M28840/809*B					-	3 343 (84 91)		
D(17)	M28840/28*D*CA**	M28840/16*D***	M28840/810*A	.938 (23 82)	.625 (15 87)	1 125- 1P - 2L-D S	1.750 (44 45)	5.807 (147.50)	-		3 556 (90 32)
D(17)	M28840/28*D*CB**	M28840/16*D***	M28840/810*B					-	3.437 (87.30)		
E(19)	M28840/28*E*AA**	M28840/16*E***	M28840/811*A	.625 (15 87)	.375 (9 52)	1 312- 1P - 2L-D S	1.312 (33 32)	5.682 (144.32)	-		3 556 (90 32)
E(19)	M28840/28*E*AB**	M28840/16*E***	M28840/811*B					-	3.312 (84 12)		
E(19)	M28840/28*E*BA**	M28840/16*E***	M28840/812*A	.938 (23 82)	.625 (15 87)	1.312- 1P - 2L-D S.	1.750 (44.45)	5.832 (148.13)	-	4.889 (124.18)	3 681 (93 50)
E(19)	M28840/28*E*BB**	M28840/16*E***	M28840/812*B					-	3.462 (87 93)		
F(23)	M28840/28*F*AA**	M28840/16*F***	M28840/813*A	.750 (19 05)	.438 (11 12)	1 500- 1P - 2L-D S	1.593 (40.46)	5.738 (145 75)	-		3 681 (93 50)
F(23)	M28840/28*F*AB**	M28840/16*F***	M28840/813*B					-	3.368 (85 55)		
F(23)	M28840/28*F*BA**	M28840/16*F***	M28840/814*A	.938 (23 82)	.625 (15.87)	1 500- 1P -.2L-D S.	1.750 (44 45)	5 832 (148 13)	-		3 681 (93.50)
F(23)	M28840/28*F*BB**	M28840/16*F***	M28840/814*B					-	3.462 (87 93)		
F(23)	M28840/28*F*CA**	M28840/16*F***	M28840/815*A	1 188 (30.18)	.812 (20.62)	1 500- 1P - 2L-D S.	2 093 (53.16)	6.019 (152.88)	-		3 681 (93 50)
F(23)	M28840/28*F*CB**	M28840/16*F***	M28840/815*B					-	3.649 (92 68)		
G(25)	M28840/28*G*AA**	M28840/16*G***	M28840/816*A	.938 (23 82)	.625 (15 87)	1 625-.1P - 2L-D S.	1.750 (44 45)	5.832 (148 13)	-		3 681 (93 50)
G(25)	M28840/28*G*AB**	M28840/16*G***	M28840/816*B					-	3 462 (87 93)		
G(25)	M28840/28*G*BA**	M28840/16*G***	M28840/817*A	1 188 (30 18)	.812 (20.62)	1 625- 1P - 2L-D S	2 093 (53.16)	6.019 (152 88)	-		3 681 (93 50)
G(25)	M28840/28*G*BB**	M28840/16*G***	M28840/817*B					-	3 649 (92 68)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

(D) TABLE I Dimensions and configuration (continued)

DESIGNATOR 1/	ASSEMBLY NUMBER 6/	CONNECTOR PLUG NO 6/	BACKSHELL 6/ ASSEMBLY NO	A CABLE ENTRY MAX	A CABLE ENTRY MIN	B THREAD CLASS 2B	E REF	H MAX STY A	N MAX STY B	L MAX	Q MAX
G(25)	M28840/28*G*CA**	M28840/16*G***	M28840/818*A	1 250 (31 75)	875 (22 22)	1.625- 1P - 2L-D S	2 093 (53 16)	6 144 (156 06)	-	5 139 (130 53)	3 806 (96 67)
G(25)	M28840/28*G*CB**	M28840/16*G***	M28840/818*B					-	3 774 (95 86)		
G(25)	M28840/28*G*DA**	M28840/16*G***	M28840/819*A	1 380 (35 05)	1.000 (25 40)	1 625- 1P - 2L-D S	2 343 (59 51)	6 176 (156.87)	-		3 806 (96 67)
G(25)	M28840/28*G*DB**	M28840/16*G***	M28840/819*B					-	3 806 (96.67)		
H(29)	M28840/28*H*AA**	M28840/16*H***	M28840/820*A	1 188 (30 18)	812 (20 62)	1 812- 1P - 2L-D S	2.093 (53 16)	6 144 (156 06)	-		3 806 (96 67)
H(29)	M28840/28*H*AB**	M28840/16*H***	M28840/820*B					-	3.774 (95 86)		
H(29)	M28840/28*H*BA**	M28840/16*H***	M28840/821*A	1.380 (35 05)	1 000 (25 40)	1 812- 1P - 2L-D S	2.343 (59.51)	6 176 (156 87)	-		3 806 (96 67)
H(29)	M28840/28*H*BB**	M28840/16*H***	M28840/821*B					-	3 806 (96 67)		
J(33)	M28840/28*J*AA**	M28840/16*J***	M28840/822*A	1 380 (35 05)	1 000 (25 40)	2 000- 1P - 2L-D S	2 343 (59.51)	6 426 (163.22)	-	5 639 (143 23)	4 056 (103 02)
J(33)	M28840/28*J*AB**	M28840/16*J***	M28840/822*B					-	4 056 (103 02)		
J(33)	M28840/28*J*BA**	M28840/16*J***	M28840/823*A	1 625 (41 27)	1 250 (31 75)	2 000- 1P - 2L-D S	2 750 (69 85)	6 701 (170.21)	-		4 056 (103 02)
J(33)	M28840/28*J*BB**	M28840/16*J***	M28840/823*B					-	4.331 (110 01)		

NOTES

1 Shell sizes are provided within parentheses for information and are not a part of the designator
2 Dimensions are in inches
3 Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1.0 inch equals 25.4 mm
4 Dimensions apply after plating.
5 Normal mating keyway position shown For alternate keyway positions see MIL-C-28840
6 Assembly shall be made up of a connector and backshell of the same material

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See FIGURE 1 and TABLE I.

Classes: DJ and DJS.

Insert arrangements: See the section of MIL-STD-1698 corresponding to desired shell sizes.

Contacts: Style P or S crimp type.

Shell polarization: 1 thru 6, key position.


Marking: Part number on plug and on backshell.

Mating counterpart: Plug connectors specified in MIL-C-28840/10, 11, 12, 14, 20, and 21

Installation and removal tool: As specified in MIL-I-81969/33 and /34

Part numbers shown indicate aluminum alloy hardware. If corrosion resistant steel parts are required, the connector and accessory part numbers must be changed to designate corrosion resistant steel hardware.

EXAMPLE OF PART NUMBER M28840/28

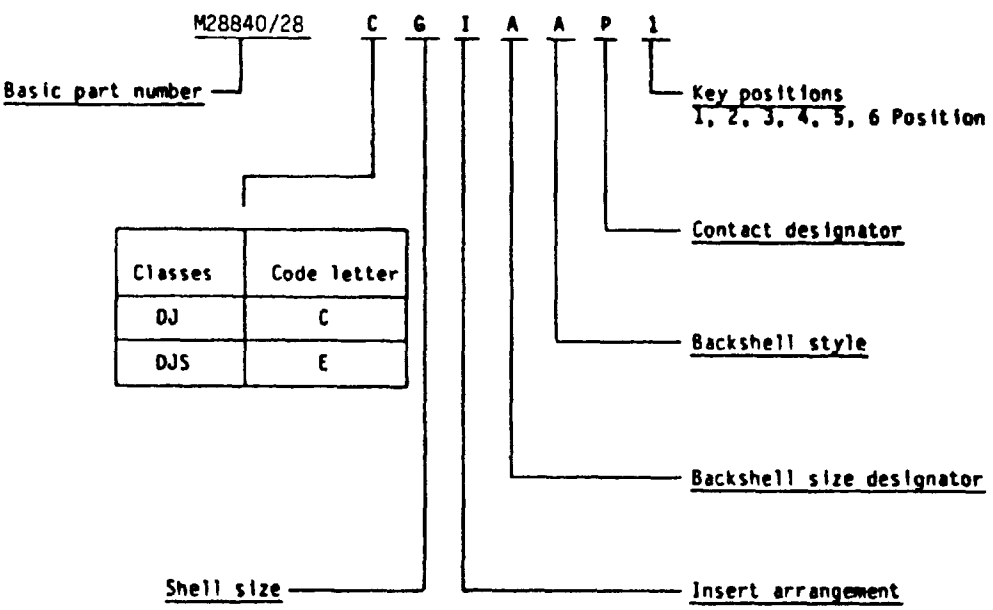

Classes	Code letter
DJ	C
DJS	E

Preparing activity.
NAVY - EC

(Project 5935-N298-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND (ELEX 8111)
WASHINGTON, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-C-28840/28D(EC)	

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:45Z
Check the source to verify that this is the current version before use.