INCH-POUND

MIL-DTL-28840/29F
11 January 2010
SUPERSEDING
MIL-DTL-28840/29E
26 April 2007

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, SCREW THREADS, HIGH DENSITY, HIGH SHOCK, SHIPBOARD, CRIMP CONTACTS, PLUG ASSEMBLY, 45º, CLASSES DJ, DJS, PJ, TJ AND ZJ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

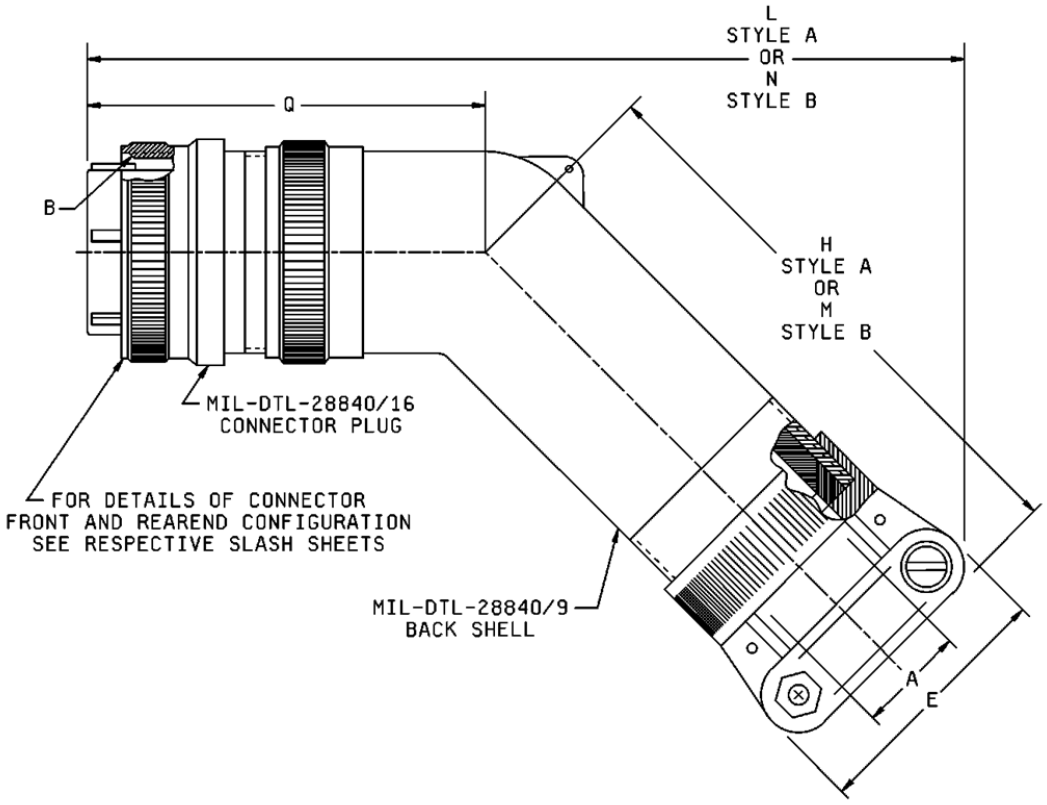


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	A cable entry		B thread class 2B
				max	min	
A (11)	M28840/29*A*AA**	M28840/16*A***	M28840/901*A	.312 (7.92)	.188 (4.77)	.750-.1P -.2L-D.S.
A (11)	M28840/29*A*AB**	M28840/16*A***	M28840/901*B			
A (11)	M28840/29*A*BA**	M28840/16*A***	M28840/924*A	.438 (11.13)	.281 (7.14)	.750-.1P -.2L-D.S.
A (11)	M28840/29*A*BB**	M28840/16*A***	M28840/924*B			
A (11)	M28840/29*A*CA**	M28840/16*A***	M28840/925*A	.562 (14.27)	.344 (8.74)	.750-.1P -.2L-D.S.
A (11)	M28840/29*A*CB**	M28840/16*A***	M28840/925*B			
B (13)	M28840/29*B*AA**	M28840/16*B***	M28840/902*A	.312 (7.92)	.188 (4.77)	.875-.1P -.2L-D.S.
B (13)	M28840/29*B*AB**	M28840/16*B***	M28840/902*B			
B (13)	M28840/29*B*BA**	M28840/16*B***	M28840/903*A	.438 (11.13)	.281 (7.14)	.875-.1P -.2L-D.S.
B (13)	M28840/29*B*BB**	M28840/16*B***	M28840/903*B			
B (13)	M28840/29*B*CA**	M28840/16*B***	M28840/926*A	.562 (14.27)	.344 (8.74)	.875-.1P -.2L-D.S.
B (13)	M28840/29*B*CB**	M28840/16*B***	M28840/926*B			
B (13)	M28840/29*B*DA**	M28840/16*B***	M28840/927*A	.625 (15.87)	.375 (9.52)	.875-.1P -.2L-D.S.
B (13)	M28840/29*B*DB**	M28840/16*B***	M28840/927*B			
C (15)	M28840/29*C*AA**	M28840/16*C***	M28840/905*A	.438 (11.13)	.281 (7.14)	1.062-.1P -.2L-D.S.
C (15)	M28840/29*C*AB**	M28840/16*C***	M28840/905*B			
C (15)	M28840/29*C*BA**	M28840/16*C***	M28840/906*A	.562 (14.27)	.344 (8.74)	1.062-.1P -.2L-D.S.
C (15)	M28840/29*C*BB**	M28840/16*C***	M28840/906*B			
C (15)	M28840/29*C*CA**	M28840/16*C***	M28840/928*A	.625 (15.87)	.375 (9.52)	1.062-.1P -.2L-D.S.
C (15)	M28840/29*C*CB**	M28840/16*C***	M28840/928*B			
C (15)	M28840/29*C*DA**	M28840/16*C***	M28840/907*A	.750 (19.05)	.438 (11.12)	1.062-.1P -.2L-D.S.
C (15)	M28840/29*C*DB**	M28840/16*C***	M28840/907*B			
C (15)	M28840/29*C*EA**	M28840/16*C***	M28840/904*A	.312 (7.92)	.188 (4.77)	1.062-.1P -.2L-D.S.
C (15)	M28840/29*C*EB**	M28840/16*C***	M28840/904*B			

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug Number (See note 6)	Backshell assembly number (See note 6)	E Ref	H max Style A	M max Style B
A (11)	M28840/29*A*AA**	M28840/16*A***	M28840/901*A	.938 (23.82)	5.432 (137.97)	--
A (11)	M28840/29*A*AB**	M28840/16*A***	M28840/901*B		--	3.062 (77.77)
A (11)	M28840/29*A*BA**	M28840/16*A***	M28840/924*A	1.125 (28.57)	5.432 (137.97)	--
A (11)	M28840/29*A*BB**	M28840/16*A***	M28840/924*B		--	3.062 (77.77)
A (11)	M28840/29*A*CA**	M28840/16*A***	M28840/925*A	1.312 (33.32)	5.557 (141.15)	--
A (11)	M28840/29*A*CB**	M28840/16*A***	M28840/925*B		--	3.187 (80.95)
B (13)	M28840/29*B*AA**	M28840/16*B***	M28840/902*A	.938 (23.82)	5.432 (137.97)	--
B (13)	M28840/29*B*AB**	M28840/16*B***	M28840/902*B		--	3.062 (77.77)
B (13)	M28840/29*B*BA**	M28840/16*B***	M28840/903*A	1.125 (28.57)	5.432 (137.97)	--
B (13)	M28840/29*B*BB**	M28840/16*B***	M28840/903*B		--	3.062 (77.77)
B (13)	M28840/29*B*CA**	M28840/16*B***	M28840/926*A	1.312 (33.32)	5.557 (141.15)	--
B (13)	M28840/29*B*CB**	M28840/16*B***	M28840/926*B		--	3.187 (80.95)
B (13)	M28840/29*B*DA**	M28840/16*B***	M28840/927*A	1.312 (33.32)	5.682 (144.32)	--
B (13)	M28840/29*B*DB**	M28840/16*B***	M28840/927*B		--	3.312 (84.12)
C (15)	M28840/29*C*AA**	M28840/16*C***	M28840/905*A	1.125 (28.57)	5.557 (141.15)	--
C (15)	M28840/29*C*AB**	M28840/16*C***	M28840/905*B		--	3.187 (80.95)
C (15)	M28840/29*C*BA**	M28840/16*C***	M28840/906*A	1.312 (33.32)	5.557 (141.15)	--
C (15)	M28840/29*C*BB**	M28840/16*C***	M28840/906*B		--	3.187 (80.95)
C (15)	M28840/29*C*CA**	M28840/16*C***	M28840/928*A	1.312 (33.32)	5.682 (144.32)	--
C (15)	M28840/29*C*CB**	M28840/16*C***	M28840/928*B		--	3.312 (84.12)
C (15)	M28840/29*C*DA**	M28840/16*C***	M28840/907*A	1.593 (40.46)	5.713 (145.11)	--
C (15)	M28840/29*C*DB**	M28840/16*C***	M28840/907*B		--	3.343 (84.91)
C (15)	M28840/29*C*EA**	M28840/16*C***	M28840/904*A	.938 (23.82)	5.557 (141.15)	--
C (15)	M28840/29*C*EB**	M28840/16*C***	M28840/904*B		--	3.187 (80.95)

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	L max style A	N max style B	Q max
A (11)	M28840/29*A*AA**	M28840/16*A***	M28840/901*A	7.404 (188.06)	--	3.306 (83.97)
A (11)	M28840/29*A*AB**	M28840/16*A***	M28840/901*B	--	5.728 (145.49)	
A (11)	M28840/29*A*BA**	M28840/16*A***	M28840/924*A	7.457 (189.41)	--	3.306 (83.97)
A (11)	M28840/29*A*BB**	M28840/16*A***	M28840/924*B	--	5.781 (146.84)	
A (11)	M28840/29*A*CA**	M28840/16*A***	M28840/925*A	7.727 (196.27)	--	3.431 (87.15)
A (11)	M28840/29*A*CB**	M28840/16*A***	M28840/925*B	--	6.051 (153.70)	
B (13)	M28840/29*B*AA**	M28840/16*B***	M28840/902*A	7.404 (188.06)	--	3.306 (83.97)
B (13)	M28840/29*B*AB**	M28840/16*B***	M28840/902*B	--	5.728 (145.49)	
B (13)	M28840/29*B*BA**	M28840/16*B***	M28840/903*A	7.457 (189.41)	--	3.306 (83.97)
B (13)	M28840/29*B*BB**	M28840/16*B***	M28840/903*B	--	5.781 (146.84)	
B (13)	M28840/29*B*CA**	M28840/16*B***	M28840/926*A	7.727 (196.27)	--	3.431 (87.15)
B (13)	M28840/29*B*CB**	M28840/16*B***	M28840/926*B	--	6.051 (153.70)	
B (13)	M28840/29*B*DA**	M28840/16*B***	M28840/927*A	7.938 (201.63)	--	3.556 (90.32)
B (13)	M28840/29*B*DB**	M28840/16*B***	M28840/927*B	--	6.262 (159.05)	
C (15)	M28840/29*C*AA**	M28840/16*C***	M28840/905*A	7.671 (194.84)	--	3.431 (87.15)
C (15)	M28840/29*C*AB**	M28840/16*C***	M28840/905*B	--	5.995 (152.27)	
C (15)	M28840/29*C*BA**	M28840/16*C***	M28840/906*A	7.727 (196.27)	--	3.431 (87.15)
C (15)	M28840/29*C*BB**	M28840/16*C***	M28840/906*B	--	6.051 (153.70)	
C (15)	M28840/29*C*CA**	M28840/16*C***	M28840/928*A	7.938 (201.63)	--	3.556 (90.32)
C (15)	M28840/29*C*CB**	M28840/16*C***	M28840/928*B	--	6.262 (159.05)	
C (15)	M28840/29*C*DA**	M28840/16*C***	M28840/907*A	8.058 (204.67)	--	3.556 (90.32)
C (15)	M28840/29*C*DB**	M28840/16*C***	M28840/907*B	--	6.382 (162.10)	
C (15)	M28840/29*C*EA**	M28840/16*C***	M28840/904*A	7.671 (194.84)	--	3.431 (87.15)
C (15)	M28840/29*C*EB**	M28840/16*C***	M28840/904*B	--	5.995 (152.27)	

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	A cable entry		B thread class 2B
				max	min	
D(17)	M28840/29*D*AA**	M28840/16*D***	M28840/908*A	.625 (15.87)	.375 (9.52)	1.125-.1P -.2L-D.S.
D(17)	M28840/29*D*AB**	M28840/16*D***	M28840/908*B			
D(17)	M28840/29*D*BA**	M28840/16*D***	M28840/909*A	.750 (19.05)	.438 (11.12)	1.125-.1P -.2L-D.S.
D(17)	M28840/29*D*BB**	M28840/16*D***	M28840/909*B			
D(17)	M28840/29*D*CA**	M28840/16*D***	M28840/910*A	.938 (23.82)	.625 (15.87)	1.125-.1P -.2L-D.S.
D(17)	M28840/29*D*CB**	M28840/16*D***	M28840/910*B			
E(19)	M28840/29*E*AA**	M28840/16*E***	M28840/911*A	.625 (15.87)	.375 (9.52)	1.312-.1P -.2L-D.S.
E(19)	M28840/29*E*AB**	M28840/16*E***	M28840/911*B			
E(19)	M28840/29*E*BA**	M28840/16*E***	M28840/912*A	.938 (23.82)	.625 (15.87)	1.312-.1P -.2L-D.S.
E(19)	M28840/29*E*BB**	M28840/16*E***	M28840/912*B			
F(23)	M28840/29*F*AA**	M28840/16*F***	M28840/913*A	.750 (19.05)	.438 (11.12)	1.500-.1P -.2L-D.S.
F(23)	M28840/29*F*AB**	M28840/16*F***	M28840/913*B			
F(23)	M28840/29*F*BA**	M28840/16*F***	M28840/914*A	.938 (23.82)	.625 (15.87)	1.500-.1P -.2L-D.S.
F(23)	M28840/29*F*BB**	M28840/16*F***	M28840/914*B			
F(23)	M28840/29*F*CA**	M28840/16*F***	M28840/915*A	1.188 (30.18)	.812 (20.62)	1.500-.1P -.2L-D.S.
F(23)	M28840/29*F*CB**	M28840/16*F***	M28840/915*B			

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	E REF	H max style A	M max style B
D(17)	M28840/29*D*AA**	M28840/16*D***	M28840/908*A	1.312 (33.32)	5.682 (144.32)	--
D(17)	M28840/29*D*AB**	M28840/16*D***	M28840/908*B		--	3.312 (84.12)
D(17)	M28840/29*D*BA**	M28840/16*D***	M28840/909*A	1.593 (40.46)	5.713 (145.11)	--
D(17)	M28840/29*D*BB**	M28840/16*D***	M28840/909*B		--	3.343 (84.91)
D(17)	M28840/29*D*CA**	M28840/16*D***	M28840/910*A	1.750 (44.45)	5.807 (147.50)	--
D(17)	M28840/29*D*CB**	M28840/16*D***	M28840/910*B		--	3.437 (87.30)
E(19)	M28840/29*E*AA**	M28840/16*E***	M28840/911*A	1.312 (33.32)	5.682 (144.32)	--
E(19)	M28840/29*E*AB**	M28840/16*E***	M28840/911*B		--	3.312 (84.12)
E(19)	M28840/29*E*BA**	M28840/16*E***	M28840/912*A	1.750 (44.45)	5.932 (150.67)	--
E(19)	M28840/29*E*BB**	M28840/16*E***	M28840/912*B		--	3.562 (90.47)
F(23)	M28840/29*F*AA**	M28840/16*F***	M28840/913*A	1.593 (40.46)	5.838 (148.28)	--
F(23)	M28840/29*F*AB**	M28840/16*F***	M28840/913*B		--	3.468 (88.09)
F(23)	M28840/29*F*BA**	M28840/16*F***	M28840/914*A	1.750 (44.45)	5.932 (150.67)	--
F(23)	M28840/29*F*BB**	M28840/16*F***	M28840/914*B		--	3.562 (90.47)
F(23)	M28840/29*F*CA**	M28840/16*F***	M28840/915*A	2.093 (53.16)	6.119 (155.42)	--
F(23)	M28840/29*F*CB**	M28840/16*F***	M28840/915*B		--	3.749 (95.22)
G(25)	M28840/29*G*AA**	M28840/16*G***	M28840/916*A	1.750 (44.45)	5.932 (150.67)	--
G(25)	M28840/29*G*AB**	M28840/16*G***	M28840/916*B		--	3.562 (90.47)
G(25)	M28840/29*G*BA**	M28840/16*G***	M28840/917*A	2.093 (53.16)	6.119 (155.42)	--
G(25)	M28840/29*G*BB**	M28840/16*G***	M28840/917*B		--	3.749 (95.22)

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	L max style A	N max style B	Q max
D(17)	M28840/29*D*AA**	M28840/16*D***	M28840/908*A	7.938 (201.63)	--	3.556 (90.32)
D(17)	M28840/29*D*AB**	M28840/16*D***	M28840/908*B	--	6.262 (159.05)	
D(17)	M28840/29*D*BA**	M28840/16*D***	M28840/909*A	8.058 (204.67)	--	3.556 (90.32)
D(17)	M28840/29*D*BB**	M28840/16*D***	M28840/909*B	--	6.382 (162.10)	
D(17)	M28840/29*D*CA**	M28840/16*D***	M28840/910*A	8.161 (207.29)	--	3.556 (90.32)
D(17)	M28840/29*D*CB**	M28840/16*D***	M28840/910*B	--	6.485 (164.72)	
E(19)	M28840/29*E*AA**	M28840/16*E***	M28840/911*A	7.938 (201.63)	--	3.556 (90.32)
E(19)	M28840/29*E*AB**	M28840/16*E***	M28840/911*B	--	6.282 (159.56)	
E(19)	M28840/29*E*BA**	M28840/16*E***	M28840/912*A	8.371 (212.62)	--	3.681 (93.50)
E(19)	M28840/29*E*BB**	M28840/16*E***	M28840/912*B	--	6.695 (170.05)	
F(23)	M28840/29*F*AA**	M28840/16*F***	M28840/913*A	8.272 (210.11)	--	3.681 (93.50)
F(23)	M28840/29*F*AB**	M28840/16*F***	M28840/913*B	--	6.596 (167.54)	
F(23)	M28840/29*F*BA**	M28840/16*F***	M28840/914*A	8.371 (212.62)	--	3.681 (93.50)
F(23)	M28840/29*F*BB**	M28840/16*F***	M28840/914*B	--	6.695 (170.05)	
F(23)	M28840/29*F*CA**	M28840/16*F***	M28840/915*A	8.628 (219.15)	--	3.681 (93.50)
F(23)	M28840/29*F*CB**	M28840/16*F***	M28840/915*B	--	6.952 (176.58)	

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	A cable entry		B thread class 2B
				max	min	
G(25)	M28840/29*G*AA**	M28840/16*G***	M28840/916*A	.938 (23.82)	.625 (15.87)	1.625-.1P -.2L-D.S.
G(25)	M28840/29*G*AB**	M28840/16*G***	M28840/916*B			
G(25)	M28840/29*G*BA**	M28840/16*G***	M28840/917*A	1.188 (30.18)	.812 (20.62)	1.625-.1P -.2L-D.S.
G(25)	M28840/29*G*BB**	M28840/16*G***	M28840/917*B			
G(25)	M28840/29*G*CA**	M28840/16*G***	M28840/918*A	1.250 (31.75)	.875 (22.22)	1.625-.1P -.2L-D.S.
G(25)	M28840/29*G*CB**	M28840/16*G***	M28840/918*B			
G(25)	M28840/29*G*DA**	M28840/16*G***	M28840/919*A	1.380 (35.05)	1.000 (25.40)	1.625-.1P -.2L-D.S.
G(25)	M28840/29*G*DB**	M28840/16*G***	M28840/919*B			
H(29)	M28840/29*H*AA**	M28840/16*H***	M28840/920*A	1.188 (30.18)	.812 (20.62)	1.812-.1P -.2L-D.S.
H(29)	M28840/29*H*AB**	M28840/16*H***	M28840/920*B			
H(29)	M28840/29*H*BA**	M28840/16*H***	M28840/921*A	1.380 (35.05)	1.000 (25.40)	1.812-.1P -.2L-D.S.
H(29)	M28840/29*H*BB**	M28840/16*H***	M28840/921*B			
J(33)	M28840/29*J*AA**	M28840/16*J***	M28840/922*A	1.380 (35.05)	1.000 (25.40)	2.000-.1P -.2L-D.S.
J(33)	M28840/29*J*AB**	M28840/16*J***	M28840/922*B			
J(33)	M28840/29*J*BA**	M28840/16*J***	M28840/923*A	1.625 (41.27)	1.250 (31.75)	2.000-.1P -.2L-D.S.
J(33)	M28840/29*J*BB**	M28840/16*J***	M28840/923*B			

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	E REF	H max style A	M max style B
G(25)	M28840/29*G*AA**	M28840/16*G***	M28840/916*A	1.750 (44.45)	5.932 (150.67)	--
G(25)	M28840/29*G*AB**	M28840/16*G***	M28840/916*B		--	3.562 (90.47)
G(25)	M28840/29*G*BA**	M28840/16*G***	M28840/917*A	2.093 (53.16)	6.119 (155.42)	--
G(25)	M28840/29*G*BB**	M28840/16*G***	M28840/917*B		--	3.749 (95.22)
G(25)	M28840/29*G*CA**	M28840/16*G***	M28840/918*A	2.093 (53.16)	6.244 (158.60)	--
G(25)	M28840/29*G*CB**	M28840/16*G***	M28840/918*B		--	3.874 (98.40)
G(25)	M28840/29*G*DA**	M28840/16*G***	M28840/919*A	2.343 (59.51)	6.276 (159.41)	--
G(25)	M28840/29*G*DB**	M28840/16*G***	M28840/919*B		--	3.906 (99.21)
H(29)	M28840/29*H*AA**	M28840/16*H***	M28840/920*A	2.093 (53.16)	6.244 (158.60)	--
H(29)	M28840/29*H*AB**	M28840/16*H***	M28840/920*B		--	3.874 (98.40)
H(29)	M28840/29*H*BA**	M28840/16*H***	M28840/921*A	2.343 (59.51)	6.276 (159.41)	--
H(29)	M28840/29*H*BB**	M28840/16*H***	M28840/921*B		--	3.906 (99.21)
J(33)	M28840/29*J*AA**	M28840/16*J***	M28840/922*A	2.343 (59.51)	6.526 (165.76)	--
J(33)	M28840/29*J*AB**	M28840/16*J***	M28840/922*B		--	4.156 (105.56)
J(33)	M28840/29*J*BA**	M28840/16*J***	M28840/923*A	2.750 (69.85)	6.801 (172.75)	--
J(33)	M28840/29*J*BB**	M28840/16*J***	M28840/923*B		--	4.431 (112.55)

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Designator (See note 3)	Assembly number (See note 6)	Connector plug number (See note 6)	Backshell assembly number (See note 6)	L max style A	N max style B	Q max
G(25)	M28840/29*G*CA**	M28840/16*G***	M28840/918*A	8.841 (224.56)	--	3.806 (96.67)
G(25)	M28840/29*G*CB**	M28840/16*G***	M28840/918*B	--	7.165 (181.99)	
G(25)	M28840/29*G*DA**	M28840/16*G***	M28840/919*A	8.950 (227.33)	--	3.806 (96.67)
G(25)	M28840/29*G*DB**	M28840/16*G***	M28840/919*B	--	7.274 (184.76)	
H(29)	M28840/29*H*AA**	M28840/16*H***	M28840/920*A	8.841 (224.56)	--	3.806 (96.67)
H(29)	M28840/29*H*AB**	M28840/16*H***	M28840/920*B	--	7.165 (181.99	
H(29)	M28840/29*H*BA**	M28840/16*H***	M28840/921*A	8.950 (227.33)	--	3.806 (96.67)
H(29)	M28840/29*H*BB**	M28840/16*H***	M28840/921*B	--	7.274 (184.76)	
J(33)	M28840/29*J*AA**	M28840/16*J***	M28840/922*A	9.377 (238.18)	--	4.056 (103.02)
J(33)	M28840/29*J*AB**	M28840/16*J***	M28840/922*B	--	7.701 (194.61)	
J(33)	M28840/29*J*BA**	M28840/16*J***	M28840/923*A	9.659 (245.34)	--	4.056 (103.02)
J(33)	M28840/29*J*BB**	M28840/16*J***	M28840/923*B	--	7.983 (202.77)	

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Shell sizes are provided within parentheses for information and are not a part of the designator.
4. Dimensions apply after plating.
5. Normal mating key position shown. Alternate key positions in accordance with MIL-DTL-28840.
6. Assembly shall be made of a connector and backshell of the same material.


FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Classes: DJ and DJS, PJ, TJ, ZJ.
Insert Arrangements: See the section of MIL-STD-1698 corresponding to desired shell size.
Contacts: Style P or S crimp type.
Shell polarization: 1 thru 6, key position.
Marking: Part or Identifying Number (PIN) on shell.
Mating counterpart: Mating connectors in accordance with MIL-DTL-28840/16, 10, 11, 12, 13, 14, 20 and 21.
Installation and removal tool: In accordance with MIL-I-81969/33 and /34.
PIN's shown indicate aluminum alloy hardware. If corrosion resistant steel parts are required, the connector and accessory PIN's must be changed to designate corrosion resistant hardware.

PIN example:

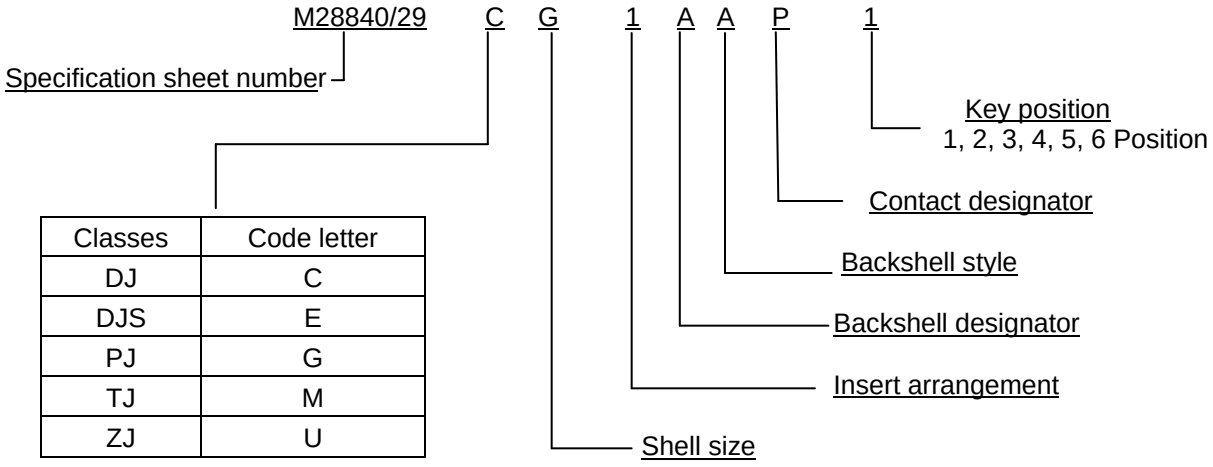

Classes	Code letter
DJ	C
DJS	E
PJ	G
TJ	M
ZJ	U

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/9
MIL-DTL-28840/10
MIL-DTL-28840/11
MIL-DTL-28840/12
MIL-DTL-28840/13
MIL-DTL-28840/14
MIL-DTL-28840/16
MIL-DTL-28840/20
MIL-DTL-28840/21
MIL-I-81969/33
MIL-I-81969/34
MIL-STD-1698

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5935–2008-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.