INCH-POUND


MIL-DTL-28840/30C
11 January 2010
SUPERSEDING
MIL-DTL-28840/30B
20 April 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, HIGH SHOCK, HIGH DENSITY, SHIPBOARD, METAL CONDUIT COUPLING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28840.

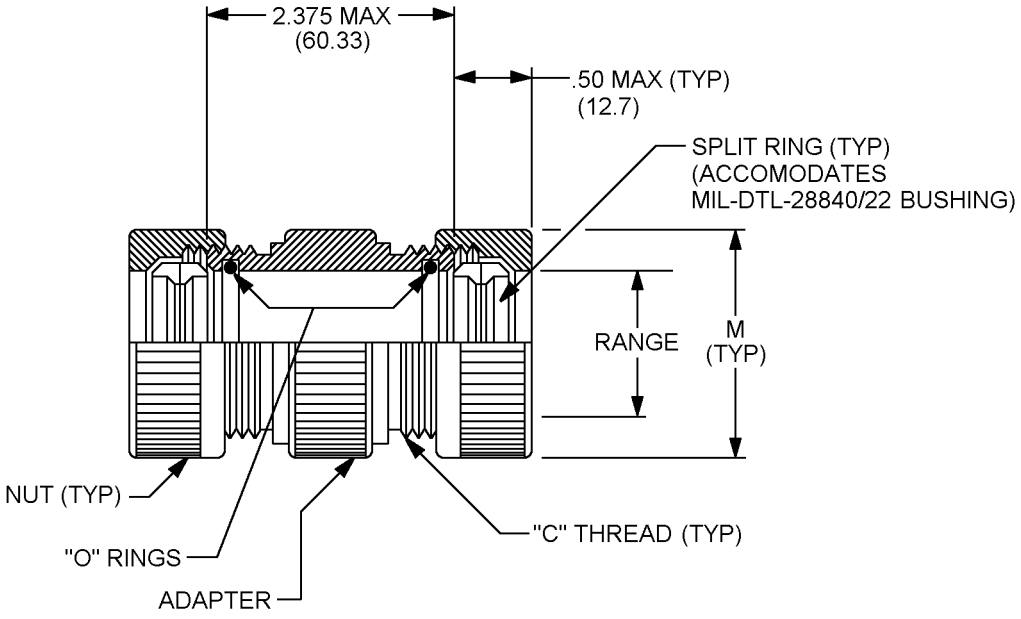


STYLE A
(FOR MIL-DTL-28840/4 -** A PLAIN CONDUIT)

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

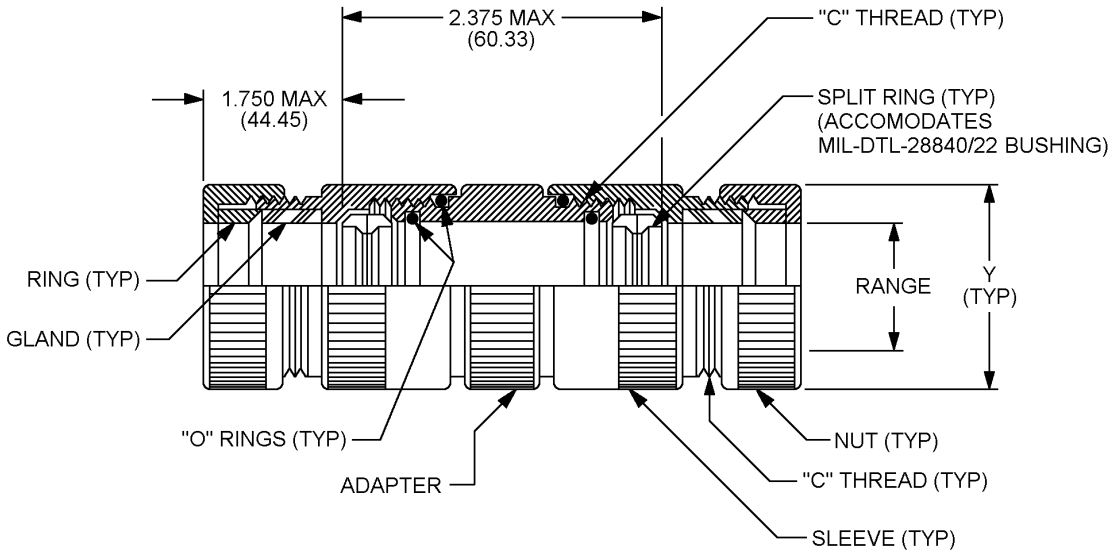

STYLE B

(FOR MIL-DTL-28840/4 -**B JACKET CONDUIT)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Dash no.	Conduit size	Sealing range		C thread	M max dia	V thread class 2	Y max dia
		Max	Min				
03	03	.63 (16.0)	.50 (12.7)	.875-20 UNEF	1.12 (28.5)	1.00-20 UNEF	1.19 (30.23)
04	04	.75 (19.1)	.63 (16.0	1.000-20 UNEF	1.25 (31.8)	1.188-18 UNEF	1.38 (35.1)
05	05	.88 (22.4)	.75 (18.1)	1.125-18 UNEF	1.43 (36.3)	1.438-18 UNEF	1.63 (41.4)
06	06	1.00 (22.4)	.88 (22.4)	1.250-18 UNEF	1.62 (41.2)	1.750-18 UNS	1.94 (49.3)
08	08	1.38 (35.1)	1.19 (30.2)	1.625-18 UNEF	1.81 (46.0)	2.00-18 UNS	2.19 (55.6)
10	10	1.63 (41.4)	1.44 (36.6)	1.875-18 UNS	2.18 (55.4)	2.250-26 UN	2.44 (62.0)
12	12	1.88 (47.8)	1.63 (41.4)	2.125-16 UN	2.56 (65.0)	2.50-16 UN	2.69 (68.3)
16	16	2.38 (60.5)	2.13 (54.1)	2.750-16 UN	3.06 (77.8)	3.00-16 UN	3.19 (81.0)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimensions apply after plating.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.


Interface dimensions in accordance with MIL-DTL-28840.

Materials shall be aluminum alloy, in accordance with, ASTM B85/B85M, ASTM B108/B108M, or ASTM B26/B26M, ASTM B209, ASTM B211, or ASTM B221. Corrosion resistant steel in accordance with ASTM A276, ASTM A580/A580M or ASTM A473, type 316.

Finish: Finish shall be in accordance with MIL-DTL-28840.

Corrosion resistant steel components shall be cadmium plate, black. The screws and washers shall be passivate in accordance with SAE-AMS2700, type 2.

Marking: The backshell shall be identified with the manufacturer's name or trademark and the Part or Identifying Number (PIN). The example of the PIN is as follows:

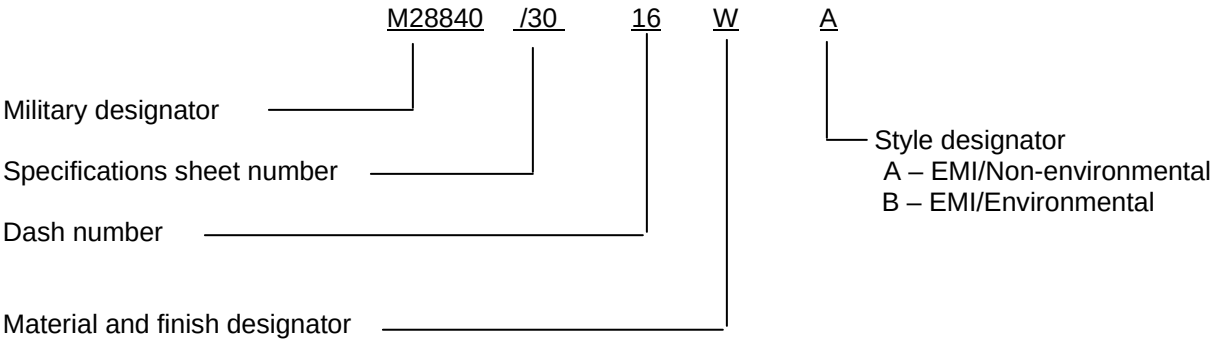

W - Aluminum, cadmium plate, olive drab over electroless nickel
D - Corrosion resistant steel cadmium plate, black
F – Wrought aluminum, pure electrodeposited aluminum – non-reflective
L - Wrought aluminum, Nickel Fluorocarbon Polymer non-reflective
S - Wrought aluminum, zinc nickel – non-reflective

Qualification: Two sample in each shell size for which qualification is desired, and shall be tested in accordance with MIL-DTL-28840.

Qualification of MIL-DTL-28840/5 will qualify MIL-DTL-28840/30 by similarity for groups 5 and 6 tests.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.

Referenced document. In addition to MIL-DTL-28840, this document references the following:

MIL-DTL-28840/5	ASTM A276	ASTM B209
MIL-DTL-28840/22	ASTM A580/A580M	ASTM B211
	ASTM A473	ASTM B221
	ASTM B85/B85M	SAE-AMS2700
	ASTM B26/B26M	
	ASTM B108/B108M	

CONCLUDING MATERIAL

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2008-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:46Z
Check the source to verify that this is the current version before use.