
ARMY-ME
NAVY-MC

ARMY-AV
AIR FORCE-11
DLA-1S
NSA-NS

FED SUP CLASS
5310

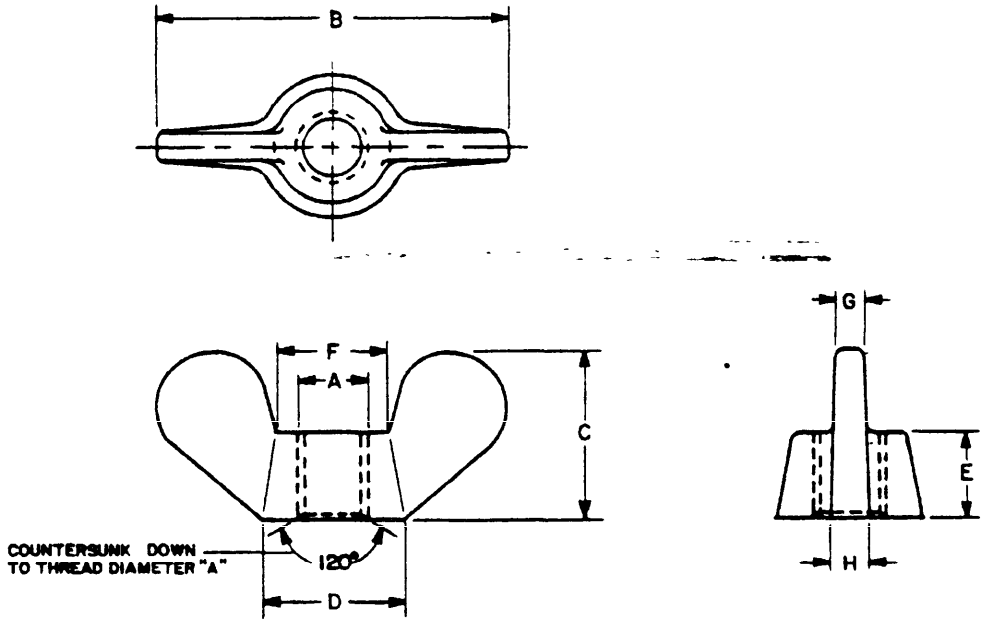

NOTES:

1. Dimensions. Unless otherwise specified, dimensions are in millimeters (mm).
2. Part number. The part number consists of the DS number plus the dash number.
   Example: DS51402-01.
3. Referenced documents shall be of the issue in effect on date of invitations for bids or request for proposal except that referenced adopted industry documents shall give the date of the issue adopted.
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

REQUIREMENTS:

1. Type. Cold forged (type A, style 1 of procurement specification).
2. Material. Steel, carbon, 345 MPa minimum tensile strength; Brass, commercial.
3. Protective finish. Steel nuts, cadmium plated per QQ-P-416, type II, class 3 (5.1 µm thick).
4. Threads. "M" profile, coarse pitch, tolerance class 6H in accordance with FED-STD-H28/21.

METRIC

APPROVED 15 OCT 1981 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P.A. AR Other Cust. 99	International interest	TITLE NUT, PLAIN, WING, METRIC	MILITARY STANDARD DS 51402
PROCUREMENT SPECIFICATION FF-N-845		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5310-0927

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.

User activities.
ARMY-ME
NAVY-MC

Review activities.
ARMY-AV
AIR FORCE-11
DLA-IS
MSA-MS

FED SUP CLASS
5310

TABLE I. Dimensions and dash numbers.

Dash number	Material	A	B	C	D	E	F	G	H
-01	Steel	M2X0.4	20±0.65	10±0.45	8±0.45	5±0.38	6±0.38	1.6±0.30	2±0.30
-02	Brass								
-03	Steel	M2.5X0.45	20±0.65	10±0.45	8±0.45	5±0.38	6±0.38	1.6±0.30	2±0.30
-04	Brass								
-05	Steel	M3X0.5	20±0.65	10±0.45	8±0.45	5±0.38	6±0.38	1.6±0.30	2±0.30
-06	Brass								
-07	Steel	M4X0.7	20±0.65	10±0.45	8±0.45	5±0.38	6±0.38	1.6±0.30	2±0.30
-08	Brass								
-09	Steel	M5X0.8	25±0.65	12±0.55	10±0.45	6±0.38	8±0.45	2±0.30	2.5±0.30
-10	Brass								
-11	Steel	M6X1	32±0.80	16±0.55	12±0.55	8±0.45	10±0.45	2.5±0.30	3±0.30
-12	Brass								
-13	Steel	M8X1.25	40±0.80	20±0.65	16±0.55	10±0.45	12±0.55	3±0.30	4±0.38
-14	Brass								
-15	Steel	M10X1.5	50±0.80	25±0.65	20±0.65	12±0.55	16±0.55	4±0.38	5±0.38
-16	Brass								
-17	Steel	M12X1.75	64±0.95	32±0.80	23±0.65	14±0.55	19±0.65	5±0.38	6±0.38
-18	Brass								
-19	Steel	M16X2	72±0.95	36±0.80	28±0.65	16±0.55	22±0.65	6±0.38	7±0.45
-20	Brass								
-21	Steel	M20X2.5	90±1.1	45±0.80	36±0.80	20±0.65	28±0.65	7±0.45	9±0.45
-22	Brass								
-23	Steel	M24X3	112±1.1	56±0.95	45±0.80	24±0.65	36±0.80	9±0.45	11±0.55
-24	Brass								

METRIC

APPROVED 15 OCT 1981 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P.A. AR Other Govt. 99	International interest	TITLE NUT, PLAIN, WING, METRIC	MILITARY STANDARD DS 51402
PROCUREMENT SPECIFICATION FF-N-845		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

5310-0927

Source: https://assist.dla.mil -- Downloaded: 202640-23T18:01Z
Check the source to verify that this is the current version before use.

* U.S. GOVERNMENT PRINTING OFFICE 1981 — 505-022/8232