
FED SUP CLASS
5305

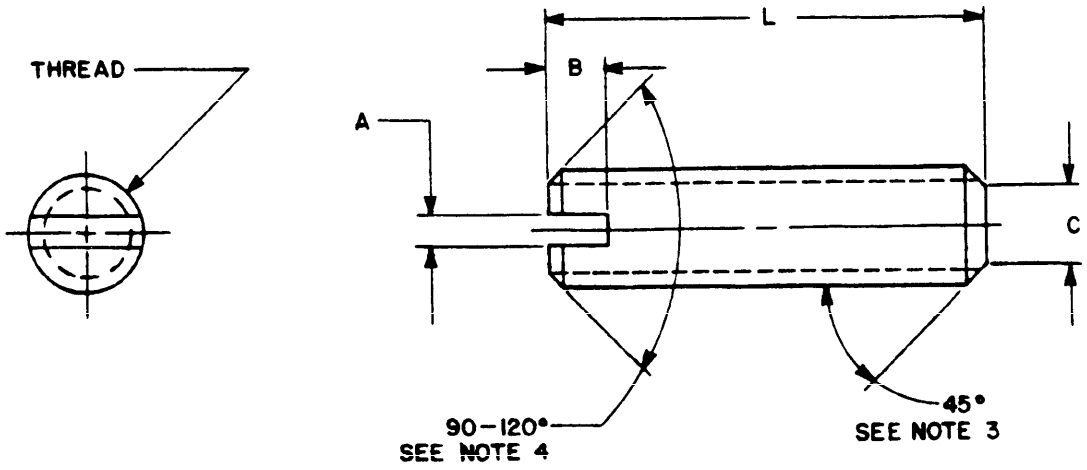

REQUIREMENTS

1. MATERIAL. STEEL, LOW OR MEDIUM CARBON IN ACCORDANCE WITH FF-S-210.
2. FINISH. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3 (5.1 µm THICK).
3. THREADS. IN ACCORDANCE WITH FED-STD-H28/21, TOLERANCE CLASS 6g, BEFORE PLATING.
4. HARDNESS. 30-37HRC OR SURFACE HARDENED TO 64HR30N, MINIMUM
5. PART NUMBER. THE DS PART NUMBER CONSISTS OF THE DS NUMBER PLUS THE DASH NUMBER EXAMPLE: DS51411-1.

NOTES:

1. DIMENSIONS. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (mm)
2. TOLERANCES. ANGLES ± 5° UNLESS OTHERWISE SPECIFIED.
3. THE 45° ANGLE APPLIES ONLY TO THE PORTION OF THE POINT BELOW THE ROOT DIAMETER OF THE THREAD.
4. CHAMFER ON FACE SHALL EXTEND SLIGHTLY BELOW THE THREAD ROOT. THE EDGE BETWEEN THE FACE AND CHAMFER MAY BE SLIGHTLY ROUNDED.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

METRIC

User activities:
ARMY - CE, ER, ME
NAVY - MC, OS, SH

Review activities:
ARMY - AV, MI
DLA - IS
NSA - NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AR Other Cust. 99	International interest	TITLE: SETSCREW, SLOTTED HEADLESS, FLAT POINT, CARBON STEEL, CADMIUM PLATED, METRIC	MILITARY STANDARD DS51411
PROCUREMENT SPECIFICATION: FF-S-210		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAR 72 6721 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1426

Source: https://assist.dla.mil - Downloaded: 2026-02-23T18:04Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

User activities:
Army - CE, ER, ME
NAVY - MC, OS, SH

Review activities:
ARMY - AV, MI
DLA - IS
NSA - NS

Thread designation		M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8	M6x1	M8x1.25	M10x1.5
C	max.	0.80	1.00	1.50	2.00	2.50	3.50	4.00	5.50	7.00
	min. .	0 55	0 75	1.25	1.75	2.25	3.20	3 70	5.20	6.64
A	min..	0 31	0.31	0.46	0.46	0.66	0.86	1.06	1.26	1 66
	max .	0 45	0.45	0.60	0.60	0.80	1.00	1.20	1.51	1.91
B	min .	0.88	1.00	1.10	1.25	1.75	2.00	2.50	3.10	3.75
	max..	1.06	1.20	1.33	1.50	2.05	2.35	2.90	3.60	4.25
L		Dash numbers								
nom	min max									
2 0	1.7 2 3	-1	-8							
2.5	2.2 2.8	-2	-9	-16						
3.0	2.7 3.3	-3	-10	-17	-24					
4.0	3.7 4.3	-4	-11	-18	-25	-33				
5.0	4 7 5.3	-5	-12	-19	-26	-34	-42			
6 0	5.7 6 3	-6	-13	-20	-27	-35	-43	-51		
8.0	7.7 8.3	-7	-14	-21	-28	-36	-44	-52	-60	
10.0	9 7 10.3		-15	-22	-29	-37	-45	-53	-61	-70
12 0	11.7 12 3			-23	-30	-38	-46	-54	-62	-71
14.0	13.5 14.5				-31	-39	-47	-55	-63	-72
16.0	15.5 16.5				-32	-40	-48	-56	-64	-73
20.0	19.5 20.5					-41	-49	-57	-65	-74
25.0	24.5 25.5						-50	-58	-66	-75
30.0	29.5 30.5							-59	-67	-76
35 0	34.5 35.5								-68	-77
40 0	39.5 40 5								-69	-78
45 0	44.5 45.5									-79
50.0	49 5 50 5									-80

METRIC

APPROVED 26 APRIL 1982 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P. A. AR	International interest	TITLE	MILITARY STANDARD
Other Cust. 99		SETSCREW,SLOTTED HEADLESS,FLAT POINT, CARBON STEEL,CADMIUM PLATED, METRIC	DS51411
PROCUREMENT SPECIFICATION FF-S-210		SUPERSEDES.	PAGE 2 OF 2

DD FORM 1 MAR 72 672-1 (Obsolete) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.