MILITARY SPECIFICATION SHEET

HEADSET-MICROPHONE, HEARING PROTECTIVE TYPE HIGH AMBIENT NOISE LEVELS, 105-125 dB M87919/1-01

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the headset-microphone described herein shall consist of this specification and the latest issue of MIL-H-87819.


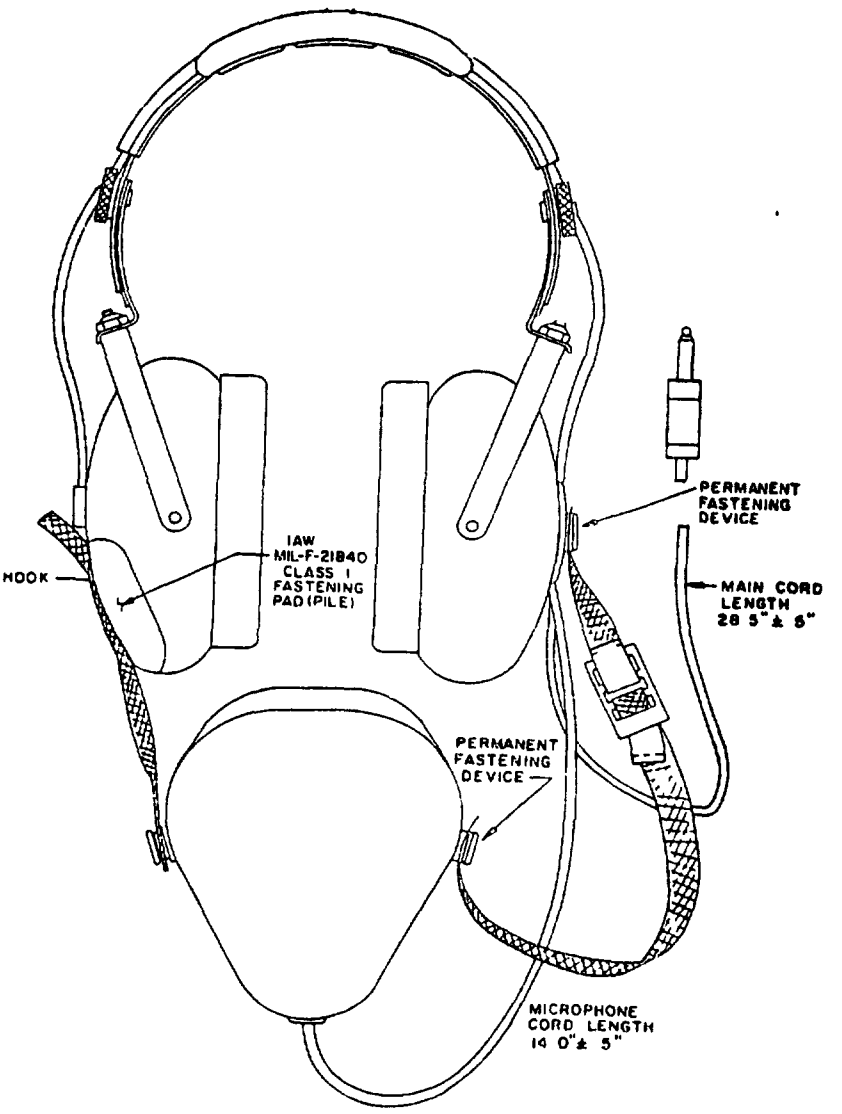


FIGURE 1. Headset-microphone assembly M87819/1-01.

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:23Z
Check the source to verify that this is the current version before use.

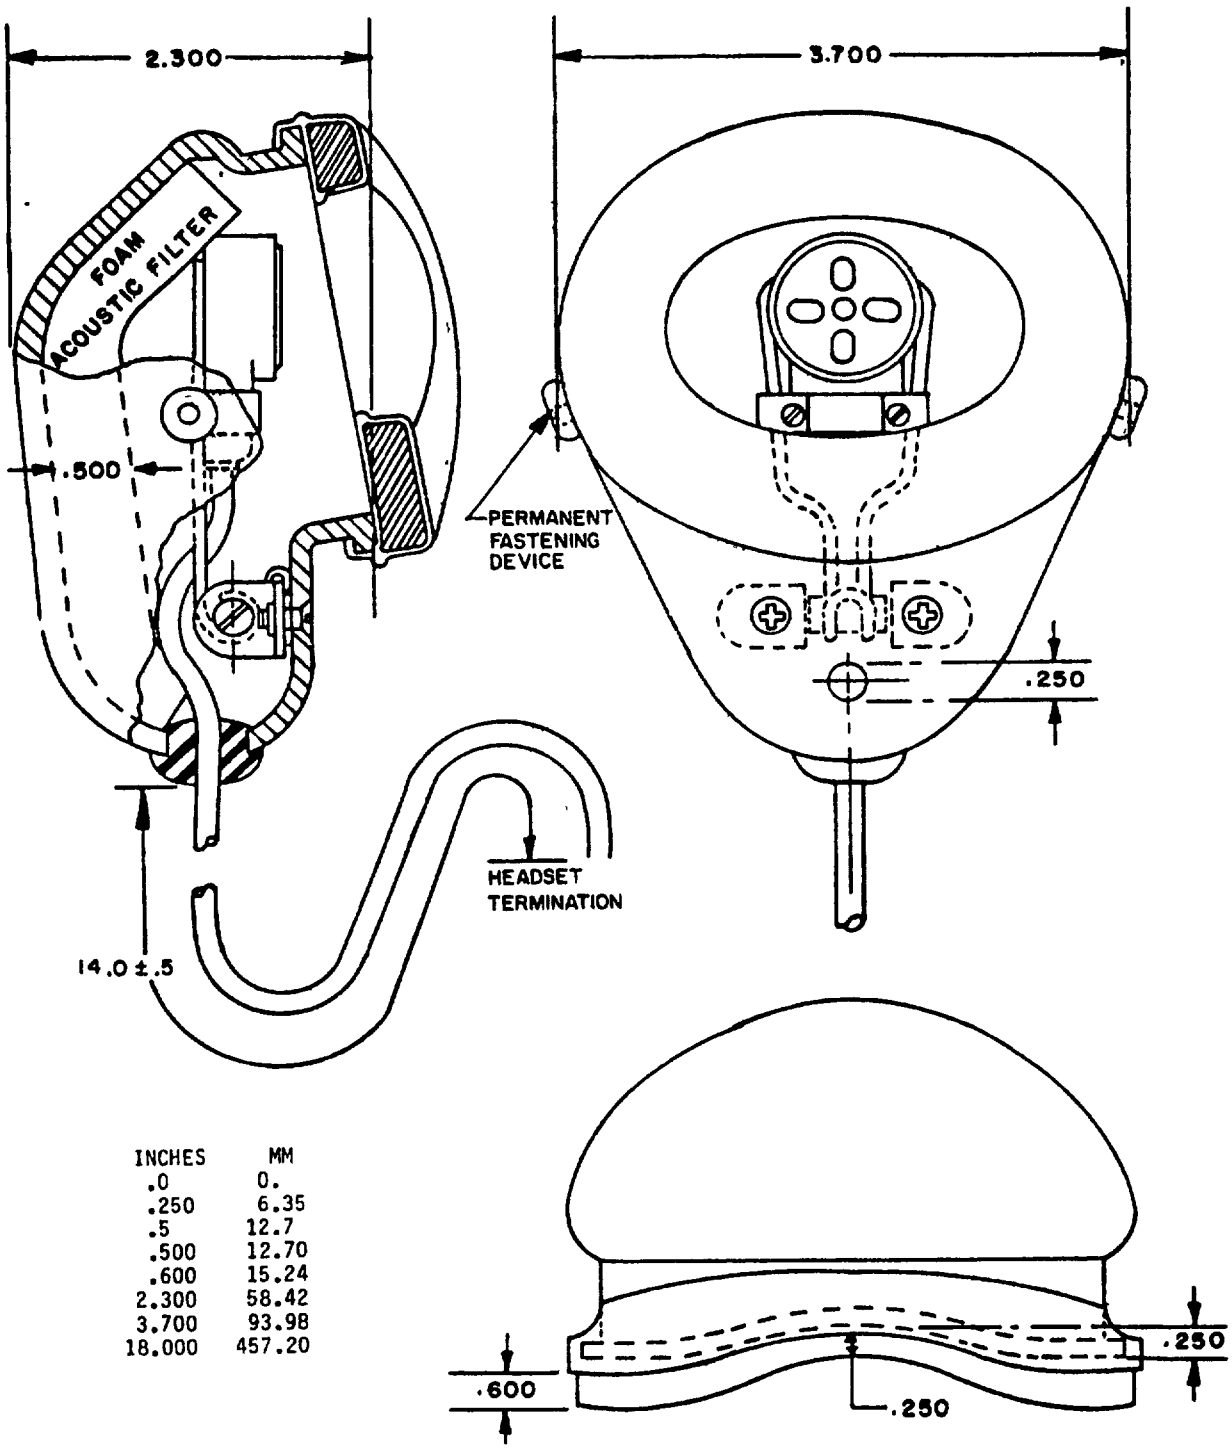



INCHES	MM
.0	0.
.250	6.35
.5	12.7
.500	12.70
.600	15.24
2.300	58.42
3.700	93.98
18.000	457.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±0.015 (0.38 mm).

FIGURE 2. Microphone assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:23Z
Check the source to verify that this is the current version before use.

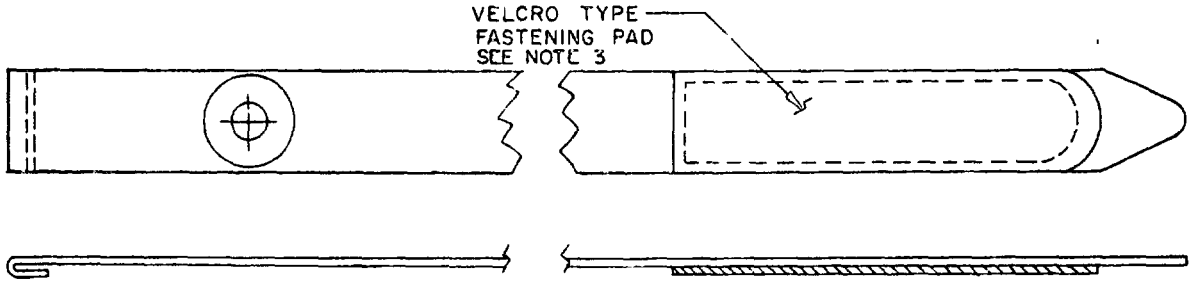

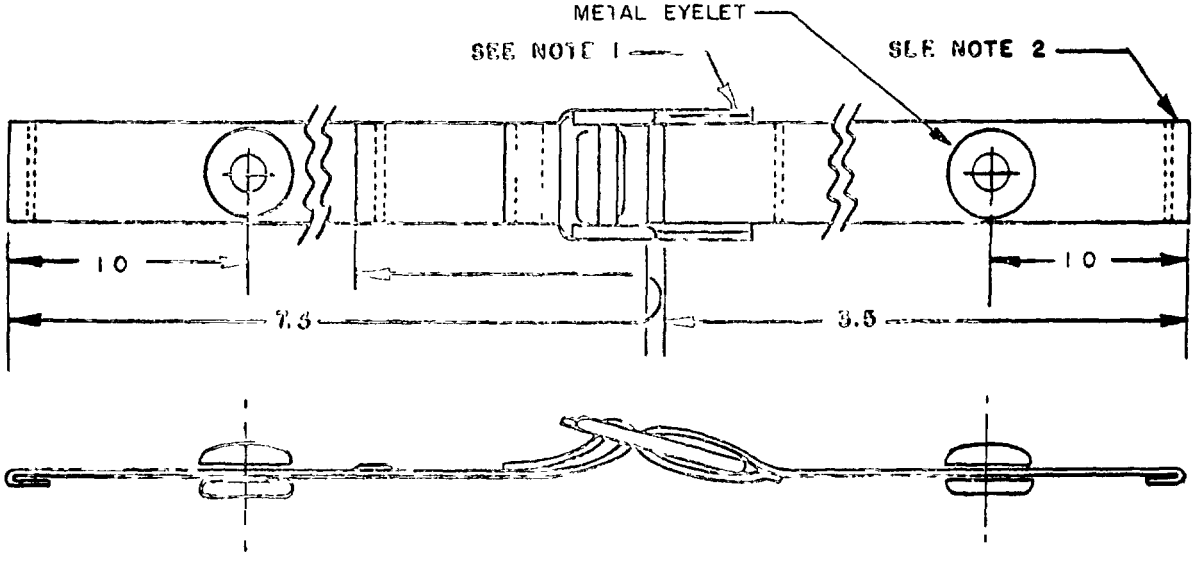



INCHES	MM
.625	15.88
1.250	31.75
1.500	38.10
3.5	89.0
7.3	185.0

NOTES:
1. Buckle must be equal to the interchangeable with Parva Buckle Co., Hamden, CT. .625 utility buckle - black.
2. Wide nylon webbing per MIL-T-5038.
3. Fastening tape (hook) shall be in accordance with MIL-F-21840 type I, class 1, 0.625 width.
4. Metric equivalents are given for general information only.
5. Dimensions are in inches.
6. Unless otherwise specified, tolerance is ±0.1 (2.5 mm).

FIGURE 3. Straps for attaching microphone assembly to headset assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.

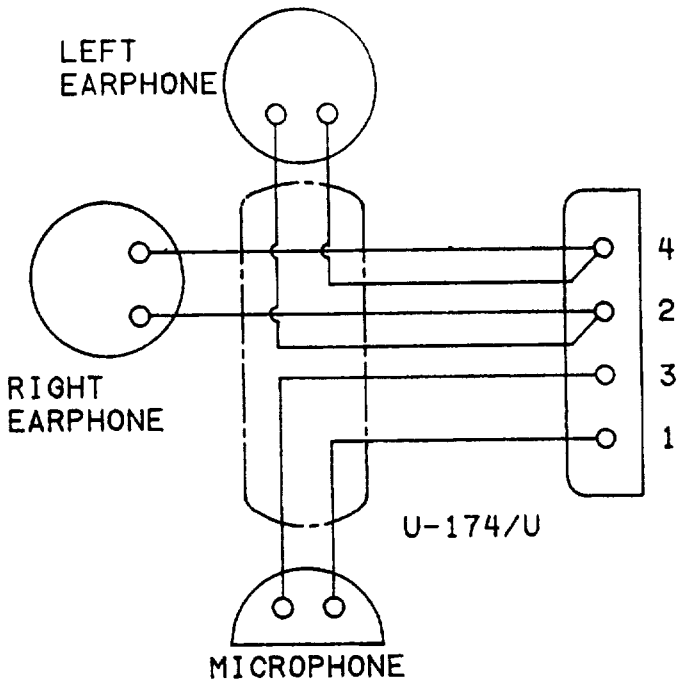

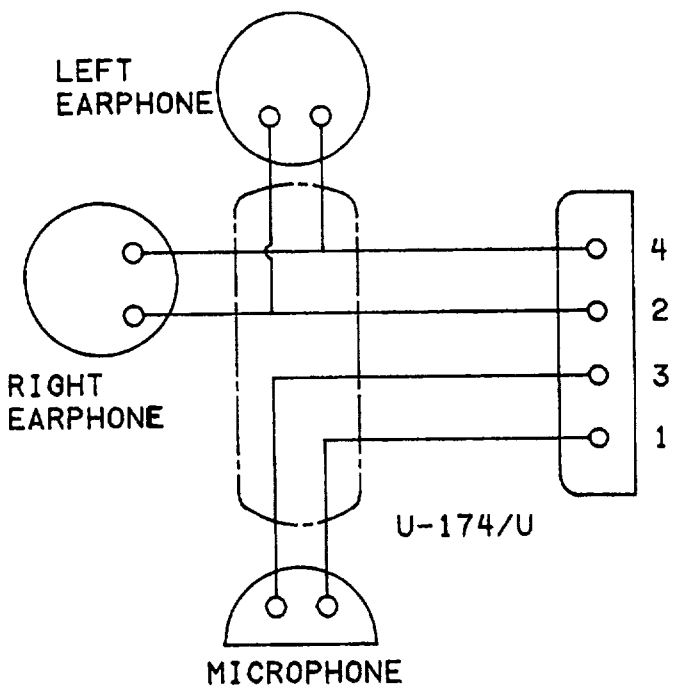

NOTE. Both 4 and 6 wire configurations are acceptable provided EMI requirements are met.

FIGURE 4. Wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figures 1, 2, and 3.

Microphone element: Type M-101/AIC per MIL-M-26542/4 (1 required).

Earphone element Type H-143/AIC per MIL-E-25670/2 (2 required).

Wiring diagram See figure 4.

Hearing protective headset Part number M87819/3-01 per MIL-H-87819/3.

Plug assembly U-174/U.

Color Lusterless black

Weight. 1.75 lbs. maximum

Performance See table I and MIL-H-87819.

Part number: M87819/1-01

Supersession data The headset-microphone M87819/1-01 supersedes headset microphone H-133/AIC

TABLE I. Parameter applicability.

Inspection	Requirements paragraph	Test paragraph	Qualification tests	Group A tests	Group B tests	Group C tests
Group I						
Visual and mechanical inspection	3.3, 3.4, 3.6, 3.7	4.7.1	X	X		
Acoustic quality	3.5.3	4.7.2	X	X		
Attenuation	3.5.4	4.7.3	X		X	
Articulation	3.5.5	4.7.4	X			
Group II						
Shock - drop	3.5.7	4.7.6	X		X	
Fungus	3.5.8	4.7.7	X			X
Vibration	3.5.9	4.7.8	X			X
Temperature	3.5.10	4.7.9	X			X
Group III						
Temperature shock	3.5.11	4.7.10	X			X
Humidity	3.5.12	4.7.11	X			X
Shock	3.5.13	4.7.12	X			X
Salt fog	3.5.14	4.7.13	X			X

Custodian
Air Force - 85

Review activity
DLA - ES

Agent
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-F185-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:23Z
Check the source to verify that this is the current version before use.