
FED. SUP CLASS
5340

MS 122116 THRU MS 122155

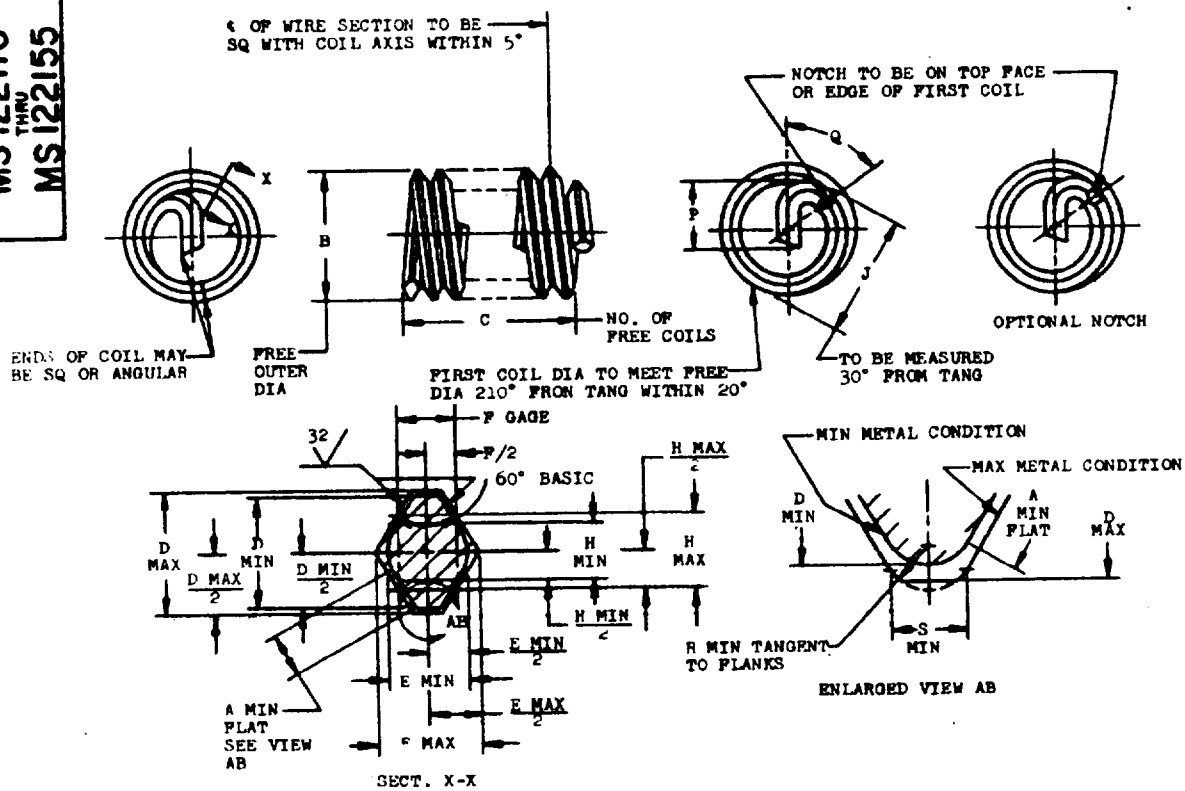

(D)

THREAD SIZE	** NOMINAL LENGTH	A MIN	B MIN	B MAX	C* ±.250 COIL	D MIN	D MAX	E MIN	E MAX	F GAGE	H MIN	H MAX
.086 -56	.129	.0027	.110	.119	5.250	.0163	.0193	.0126	.0156	.00893	.0112	.0116
.099 -48	.148	.0043	.128	.139	5.000	.0196	.0226	.0152	.0186	.01042	.01313	.01353
.112 -40	.168	.0068	.144	.159	4.750	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.125 -40	.188	.0068	.158	.173	5.500	.0241	.0271	.0189	.0219	.01250	.01584	.01624
.138 -32	.207	.0076	.178	.193	4.750	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.164 -32	.246	.0076	.205	.220	6.000	.0295	.0338	.0233	.0273	.01563	.01985	.02030
.190 -24	.285	.0120	.244	.259	5.000	.0410	.0449	.0305	.0365	.02083	.02656	.02706
.250 -20	.375	.0164	.310	.330	5.750	.0500	.0540	.0378	.0438	.02500	.03198	.03248
.3125-18	.469	.0176	.380	.400	6.625	.0560	.0600	.0416	.0486	.02778	.03558	.03608
.375 -16	.562	.0215	.452	.472	7.250	.0636	.0677	.0477	.0547	.03125	.04009	.04059
.4375-14	.656	.0267	.526	.551	7.375	.0730	.0770	.0545	.0625	.03571	.04589	.04639
.500 -13	.750	.0273	.597	.622	7.875	.0758	.0829	.0593	.0673	.03846	.04946	.04996
.5625-12	.844	.0334	.669	.694	8.250	.0861	.0900	.0649	.0729	.04167	.05363	.05413
.625 -11	.938	.0351	.742	.767	8.500	.0909	.0980	.0715	.0795	.04545	.05855	.05905
.750 -10	1.125	.0402	.881	.906	9.375	.1007	.1079	.0795	.0875	.05000	.06445	.06495
.875 -9	1.312	.0466	1.022	1.052	10.000	.1124	.1199	.0892	.0972	.05556	.07167	.07217
1.000 -8	1.500	.0544	1.166	1.196	10.125	.1264	.1350	.1004	.1094	.06250	.08069	.08119
1.125 -7	1.688	.0645	1.315	1.355	9.875	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.250 -7	1.875	.0645	1.443	1.483	11.250	.1451	.1546	.1160	.1250	.07143	.09229	.09279
1.375 -6	2.062	.0775	1.598	1.643	10.500	.1695	.1799	.1368	.1458	.08333	.10775	.10825
1.500 -6	2.250	.0775	1.727	1.772	11.500	.1695	.1799	.1368	.1458	.08333	.10775	.10825

(D) FOR CHANGE SEE SHEETS 1 AND 2.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION

P.A.	USAF - 11	TITLE: INSERT, CRES HELICAL COIL COARSE THREAD, 1-1/2 DIA NOMINAL LENGTH	MILITARY STANDARD MS 122116 THRU 122155
Other Cust	Army - AV, Navy - AS		
PROCUREMENT SPECIFICATION: MIL-I-8846	SUPERSEDES: MS21208 IN PART		SHEET 1 OF 2

Review activities: Army - WC; Navy - ; Air Force - 82
User: Army - EL, MI, ME, MU; Navy - MC, OS; Air Force -

This standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 May 53 REVISED (A) 26 May 59 (B) 24 Oct 66 (C) 15 Oct 69 (D) 24 Feb 76

Project No. 5340-2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5340

THREAD SIZE	J MIN	J MAX	P MIN	P MAX	Q	R MIN	S MIN	APPROX WEIGHT LB/100	PART NUMBERS NOTCHED	PART NUMBERS UNNOTCHED (a)
.086 -56	.103	.111	.062	.080	75°-150°	.0032	.0056	.0084	MS122135	
.099 -48	.120	.131	.070	.090	75°-150°	.0038	.0065	.0125	MS122155	
.112 -40			.070	.095	25°-100°	.0045	.0078	.0196	MS122116	MS122136
.125 -40			.078	.108	25°-100°	.0045	.0078	.0250	MS122117	MS122137
.138 -32			.091	.121	25°-100°	.0056	.0098	.0384	MS122118	MS122138
.164 -32			.118	.153	20°-100°	.0056	.0098	.0556	MS122119	MS122139
.190 -24			.141	.176	15°- 90°	.0075	.0130	.0899	MS122120	MS122140
.250 -20			.182	.233	20°- 80°	.0090	.0156	.196	MS122121	MS122141
.3125-18	.375	.390	.214	.286	20°- 80°	.0100	.0174	.369	MS122122	MS122142
.375 -16	.445	.462	.269	.348	20°- 80°	.0113	.0195	.625	MS122123	MS122143
.4375-14	.518	.536	.313	.411	20°- 80°	.0129	.0223	.943	MS122124	MS122144
.500 -13	.586	.606	.348	.458	20°- 80°	.0139	.0240	1.316	MS122125	MS122145
.5625-12	.656	.676	.390	.520	20°- 80°	.0150	.0260	1.961	MS122126	MS122146
.625 -11	.727	.747	.421	.567	20°- 80°	.0164	.0284	2.439	MS122127	MS122147
.750 -10	.840	.885	.453	.640	60°-120°	.0180	.0312	4.000	MS122128	MS122148
.875 -9	.991	1.026	.500	.734	60°-120°	.0200	.0347	6.250	MS122129	MS122149
1.000 -8	1.135	1.170	.526	.781	60°-120°	.0226	.0391	9.091	MS122130	MS122150
1.125 -7	1.260	1.315	.557	.843	60°-120°	.0258	.0446	12.928	MS122131	MS122151
1.250 -7	1.366	1.416	.679	.937	60°-120°	.0258	.0446	16.070	MS122132	MS122152
1.375 -6	1.545	1.598	.689	1.093	60°-120°	.0301	.0521	22.264	MS122133	MS122153
1.500 -6	1.676	1.727	.811	1.187	60°-120°	.0301	.0521	26.915	MS122134	MS122154

** 1. NOMINAL LENGTH EQUALS BASIC THICKNESS OF PLATE FOR INSERT ASSEMBLY.
(D) * 2. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS33537.
(D) 3. NUMBER OF FREE COILS TO BE COUNTED AND ASSEMBLED LENGTH OF INSERT TO BE MEASURED 90° FROM TANG.
4. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG).
5. SURFACE TEXTURE: ANSI B46.1-1962.
6. INSERT, WHEN ASSEMBLED IN TAPPED HOLE AS SPECIFIED IN MS33537, SHALL PRODUCE A FINISHED THD MEETING ALL REQUIREMENTS OF MIL-S-7742 AND SHALL ACCEPT EXTERNAL MIL-S-8879 THREADS.
7. DIMENSIONS IN INCHES.
8. IDENTIFICATION: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
9. DO NOT USE UNASSIGNED PART NUMBERS.
(a) UNNOTCHED INSERTS INACTIVE FOR DESIGN AFTER 15 OCT 1969. USE NOTCHED INSERTS. NOTCHED INSERTS CAN UNIVERSALLY REPLACE THE INACTIVATED INSERTS, BUT THE INACTIVATED INSERTS CANNOT REPLACE THE SUPERSEDING NOTCHED INSERTS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 23 May 53 REVISED (A) 26 May 59 (B) 24 Oct 66 (D) FOR CHANGES SEE SHEETS 1 AND 2.

Review activities: Army - WC, Navy -, Air Force - 82
User: Army - EL, ME, MI, MU, Navy - MC, OS, Air Force -

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document.

P.A. USAF - 11
Other Cust. Army - AV, Navy - AS

TITLE: INSERT, CRES HELICAL COIL COARSE THREAD, 1-1/2 DIA NOMINAL LENGTH

MILITARY STANDARD
MS 122116 THRU 122155

PROCUREMENT SPECIFICATION: MIL-I-8846
SUPERSEDES: MS21208 IN PART
SHEET 2 OF 4

* U.S. GOVERNMENT PRINTING OFFICE: 1976—603-766/3407

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:44Z
Check the source to verify that this is the current version before use.