INCH-POUND
MS18015C
w/AMENDMENT 1
28 November 2022
SUPERSEDING
MS18015C
21 JULY 2009

DETAIL SPECIFICATION SHEET

CATCH, CLAMPING AND STRIKE (CONCEALED SPRING TYPE)

Inactive for new design after 31 July 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

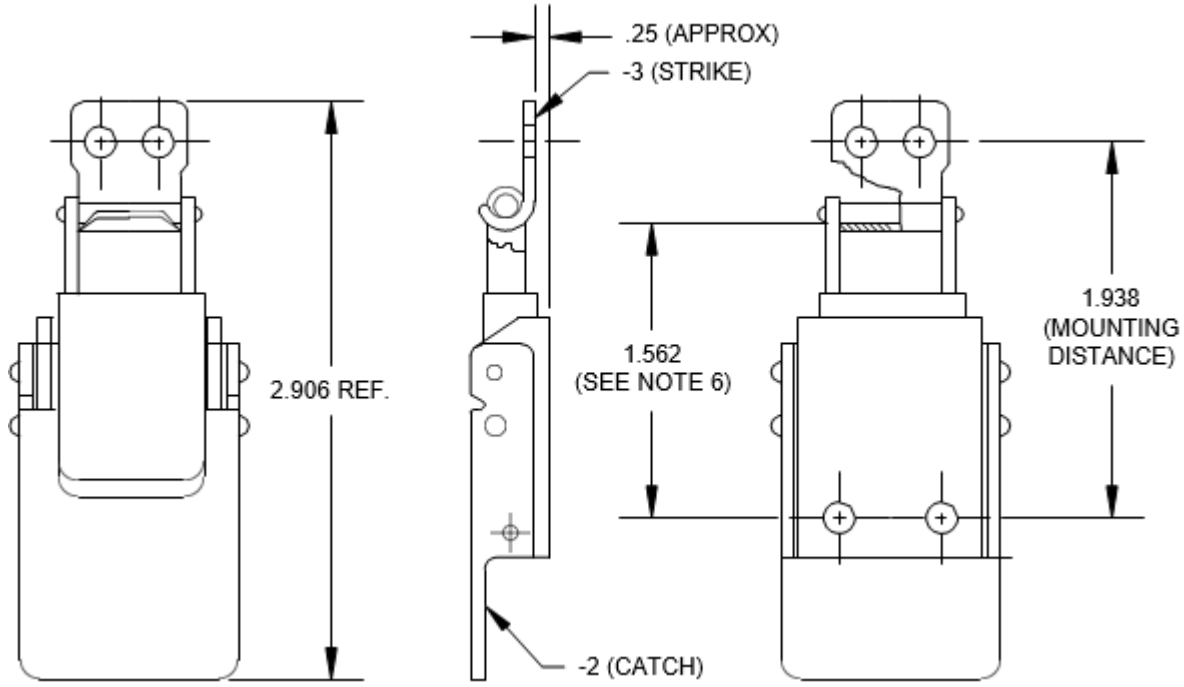


FIGURE 1. -1 CATCH CLAMPING (CATCH AND STRIKE ASSEMBLY)

AMSC N/A
FSC 5340
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

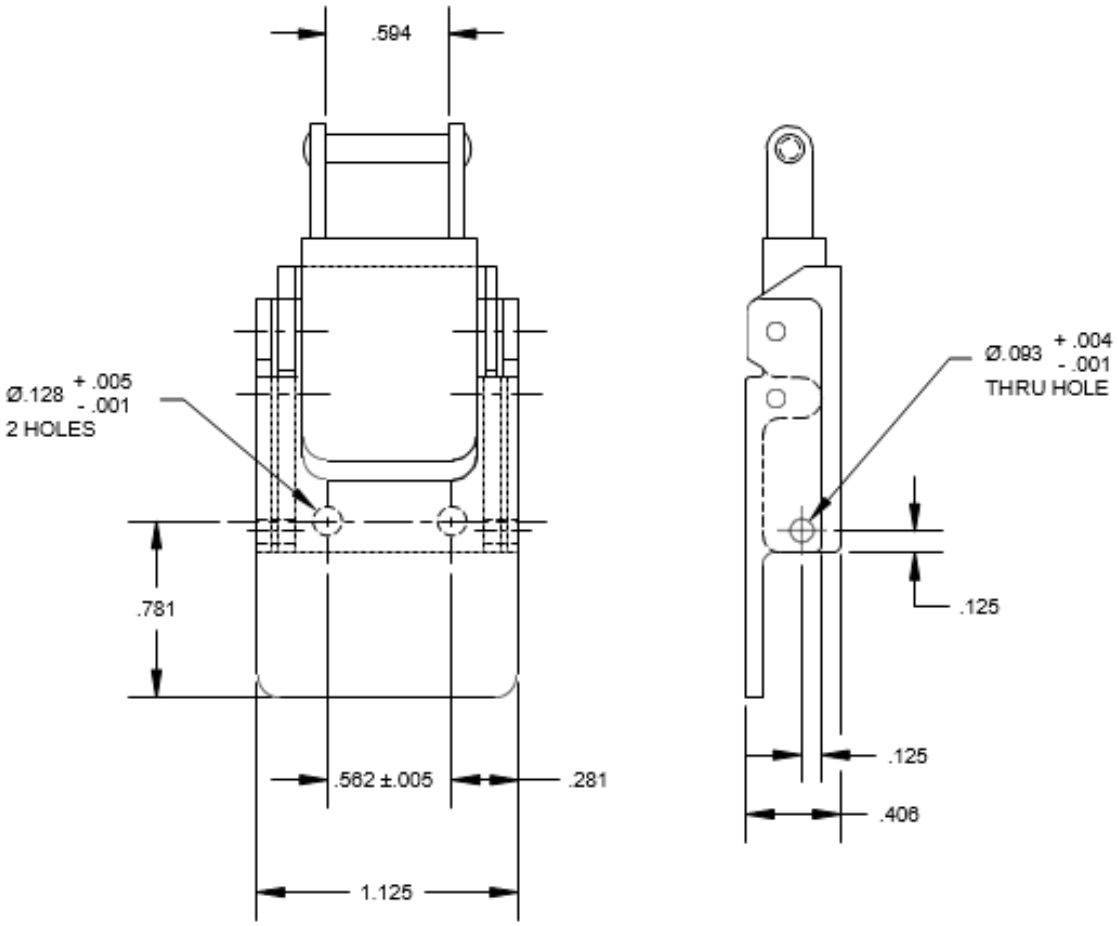


FIGURE 2. -2 CATCH

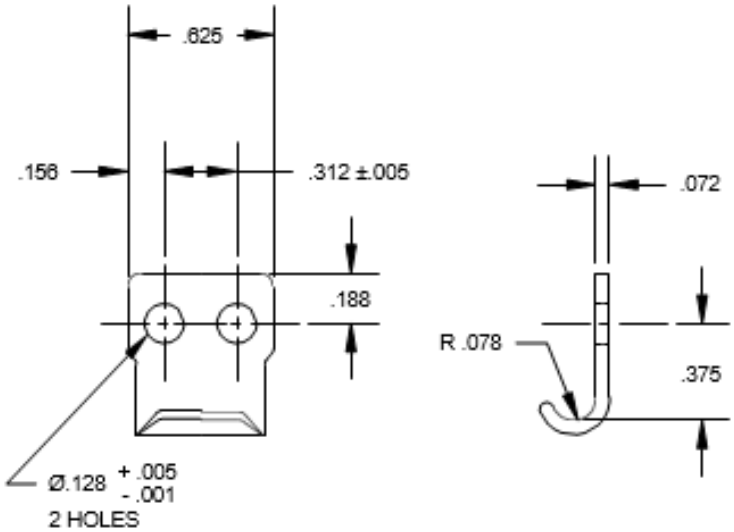


FIGURE 3. -3 STRIKE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions

PART NO.	PART IDENTIFICATION
MS18015-1*	CATCH, CLAMPING (CATCH AND STRIKE ASSEMBLY)
MS18015-2*	CATCH, CLAMPING (WITHOUT STRIKE)
MS18015-3*	STRIKE, CATCH

* Add designation ZN for zinc-nickel plating (example MS18015-2ZN). No designation indicates cadmium plating.

NOTES:

1. Material: (A) Yoke, Spring Housing – Corrosion resisting steel per ASTM A666.
   (B) Springs, Wire, Spring per SAE-AMS-QQ-W-428 and ASTM A228/A228M (springs concealed).
   (C) All remaining parts – Carbon steel per QQ-S-698.

2. Finish. Carbon steel parts – Zinc-Nickel plate in accordance with SAE AMS2417, Type 2, Grade B, or Cadmium[1/] plate per SAE AMS-QQ-P-416, Type II, Class 2.

[1/] Cadmium is an R1, R2, and D1 hazardous substance in the Aerospace and Defense Declarable Substance List. Zinc-Nickel plate per SAE AMS2417 is the preferred method.

3. Remove all burrs and break all sharp edges.

4. Dimensions in inches unless otherwise specified, Tolerances: ± .015.

5. Tension: Standard spring tension with .125 deflection to 1.562 dimension = 70 pounds.

6. This assembly is made for use on containers with overlapping edges, containers with even mating edges require the use of shims.

7. Ultimate strength: 300 lbs for strike, 600 lbs for catch.

8. For design feature purposes, this standard takes precedence over documents referenced herein.

9. Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army – AR
Navy – OS
DLA – CC

Preparing activity:
DLA – CC

(Project 5340-2023-001)

Review Activities:
Army – AT, CR, CR4, MI
Navy – AS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.