
FED. SUP. CLASS 5306





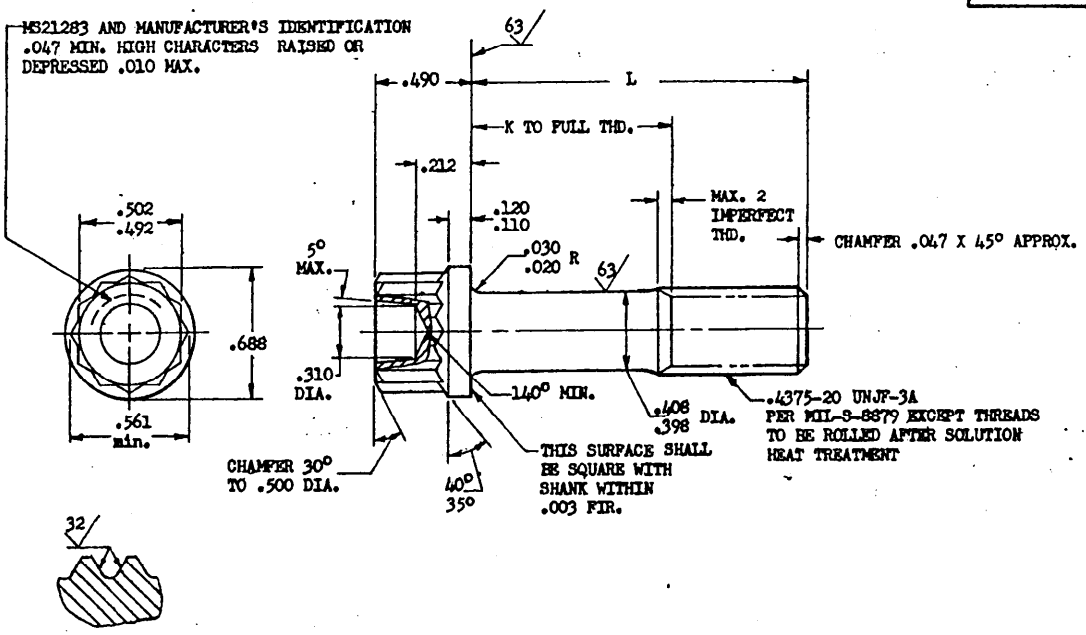

SECTION THRU THREAD PROFILE

| PART NO. | L | K +.000 -.060 | APPROX. WEIGHT LB/100 | PART NO. | L | K +.000 -.060 | APPROX. WEIGHT LB/100 | PART NO. | L | K +.000 -.060 | APPROX. WEIGHT LB/100 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | MS21283-24 | 2.125 | 1.000 | 10.38 | MS21283-45 | 4.750 | 3.625 | 20.12 |
| | | | | MS21283-25 | 2.250 | 1.125 | 10.85 | MS21283-46 | 4.875 | 3.750 | 20.59 |
| | | | | MS21283-26 | 2.375 | 1.250 | 11.32 | MS21283-47 | 5.000 | 3.875 | 21.05 |
| MS21283-06 | .812 | (a) | 5.51 | MS21283-27 | 2.500 | 1.375 | 11.79 | MS21283-48 | 5.125 | 4.000 | 21.51 |
| MS21283-07 | .875 | (a) | 5.74 | MS21283-28 | 2.625 | 1.500 | 12.26 | MS21283-49 | 5.250 | 4.125 | 21.97 |
| MS21283-08 | .938 | (a) | 5.97 | MS21283-29 | 2.750 | 1.625 | 12.72 | MS21283-50 | 5.375 | 4.250 | 22.33 |
| MS21283-09 | 1.000 | (a) | 6.20 | MS21283-30 | 2.875 | 1.750 | 13.19 | MS21283-51 | 5.500 | 4.375 | 22.80 |
| MS21283-10 | 1.062 | (a) | 6.43 | MS21283-31 | 3.000 | 1.875 | 13.66 | MS21283-52 | 5.625 | 4.500 | 23.27 |
| MS21283-11 | 1.125 | (a) | 6.67 | MS21283-32 | 3.125 | 2.000 | 14.12 | MS21283-53 | 5.750 | 4.625 | 23.74 |
| MS21283-12 | 1.188 | (a) | 6.90 | MS21283-33 | 3.250 | 2.125 | 14.59 | MS21283-54 | 5.875 | 4.750 | 24.21 |
| MS21283-13 | 1.250 | .125 | 7.13 | MS21283-34 | 3.375 | 2.250 | 15.06 | MS21283-55 | 6.000 | 4.875 | 24.67 |
| MS21283-14 | 1.312 | .188 | 7.36 | MS21283-35 | 3.500 | 2.375 | 15.52 | | | | |
| MS21283-15 | 1.375 | .250 | 7.59 | MS21283-36 | 3.625 | 2.500 | 15.99 | | | | |
| MS21283-16 | 1.438 | .312 | 7.82 | MS21283-37 | 3.750 | 2.625 | 16.45 | | | | |
| MS21283-17 | 1.500 | .375 | 8.05 | MS21283-38 | 3.875 | 2.750 | 16.92 | | | | |
| MS21283-18 | 1.562 | .438 | 8.27 | MS21283-39 | 4.000 | 2.875 | 17.39 | | | | |
| MS21283-19 | 1.625 | .500 | 8.50 | MS21283-40 | 4.125 | 3.000 | 17.85 | | | | |
| MS21283-20 | 1.688 | .562 | 8.73 | MS21283-41 | 4.250 | 3.125 | 18.31 | | | | |
| MS21283-21 | 1.750 | .625 | 8.96 | MS21283-42 | 4.375 | 3.250 | 18.75 | | | | |
| MS21283-22 | 1.875 | .750 | 9.43 | MS21283-43 | 4.500 | 3.375 | 19.31 | | | | |
| MS21283-23 | 2.000 | .875 | 9.90 | MS21283-44 | 4.625 | 3.500 | 19.66 | | | | |

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS. EXCEPT INCOMPLETE THREADS NOT TO ENTER FILLET RADIUS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON O.D. SHALL BE WITHIN .019 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735
MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEADS TO BE FORMED BY HOT OR COLD UPSETTING
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645
SURFACE ROUGHNESS: MIL-STD-10 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 1 May 61 REVISED. (A) 23 Oct 61 (B) 17 Sep 63

This standard has been approved by Bukep (Department of the Navy) and the USAF and is mandatory for use by the Department of the activity. All other military activities are required to employ this standard where suitable.

| | | |
|---|---|---|
| P.A. Navy - Wep<br>Other Cust Air Force - ASD | TITLE<br>BOLT, MACHINE - STEEL, DOUBLE HEXAGON, EXTENDED WASHER, .4375-20 (MIL-S-8879 THREAD) (B) | MILITARY STANDARD<br>MS21283 (ASG) |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 1 OF 1 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.