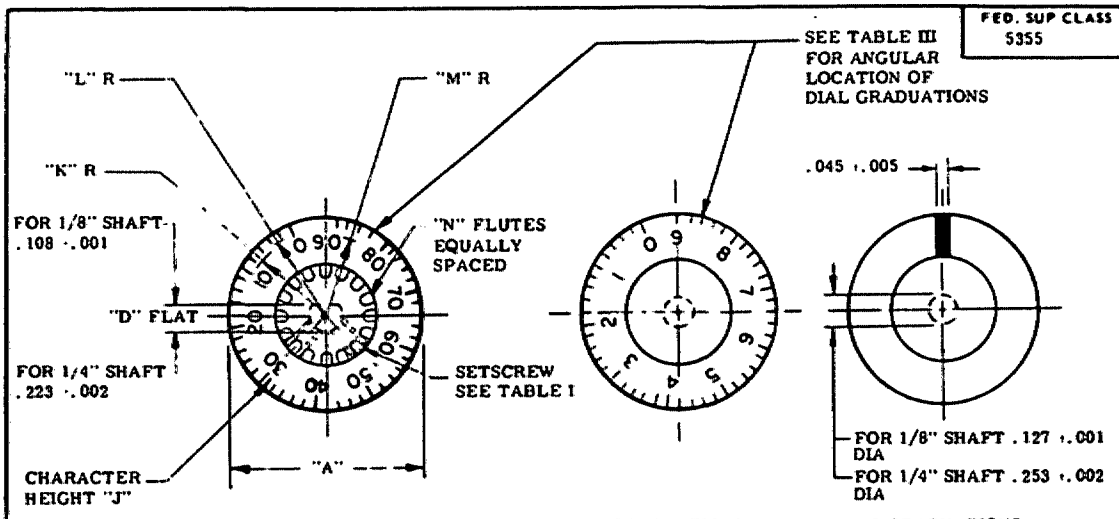
User Activities:
Review Activities:
DLA - IS

FED. SUP CLASS 5355



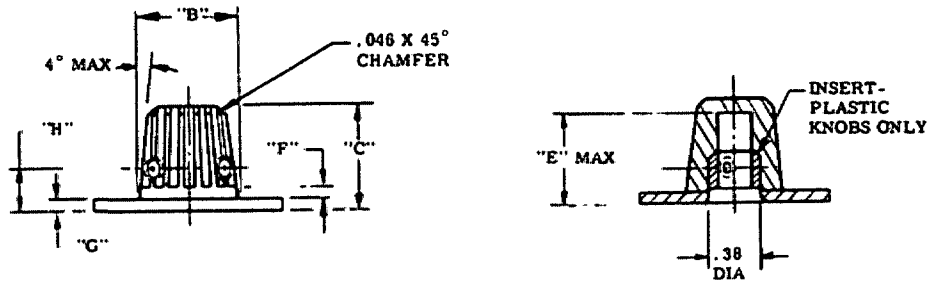


TABLE I. Knob sizes and setscrew requirement.

SIZE	Dimensions												Setscrew (2 - Req'd)	
	A	B	C	E	F	G	H	J	K	L	M	N	1/8" Shaft	1/4" Shaft
A	1.00	.50	.44	.38	.06	.07	.19	.094	.444	.465	.424	12	MS51021-102	--
N	1.50	.75	.75	.62	.09	.10	.35	.125	.656	.687	.625	16	MS51021-102	MS51021-132

TABLE II. MS dash numbers.

MS21383-0 1 A N A B

SERIES	SHAFT DIA	SIZE	STYLE DIAL	COLOR-KNOB/DIAL	INDICIA
0 - Plastic, illuminated	1 - .125 Round	N 1/	N - Degree 1/	N - Gray/Black 1/	N-White 1/
1 - Plastic, non-illuminated	2 - .125 "D" Flat	A	A - Numeric	A - Gray/Gray	B-Black
2 - Aluminum	3 - .250 Round	See table I	B - Plain	B - Gray/Clear	
	4 - .250 "D" Flat			C - Black/Black	
				D - Black/Clear	
				M - Metal, natural/clear	

1/ When all four of the "N" options (SIZE, STYLE DIAL, COLOR-KNOB/DIAL and INDICIA) are selected, omit all "N" codes from MS dash number.

(F) Entire standard revised

APPROVED 11 MAY 1973 REVISED (F) 23 August 1979

P.A. 11 Other Cust	TITLE KNOB-RADIAL INDICATOR, ILLUMINATED AND NON-ILLUMINATED	MILITARY STANDARD MS21383(USAF)	
PROCUREMENT SPECIFICATION MIL-R-25049	SUPERSEDES	SHEET 1 OF 2	

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5355-F041 PLATE NO 27065

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ it is standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.

TABLE III. Angular location of dial graduations.

Numeric	Degrees	Angular location
9	90	0°
	88	7° 20'
	86	14° 40'
	84	22°
	82	29° 20'
8	80	36° 40'
	78	44°
	76	51° 20'
	74	58° 40'
	72	66°
7	70	73° 20'
	68	80° 40'
	66	88°
	64	95° 20'
	62	102° 40'
6	60	110°
	58	117° 20'
	56	124° 40'
	54	132°
	52	139° 20'
5	50	146° 40'
	48	154°
	46	161° 20'
	44	168° 40'
	42	176°
4	40	183° 20'
	38	190° 40'
	36	198°
	34	205° 20'
	32	212° 40'
3	30	220°
	28	227° 20'
	26	234° 40'
	24	242°
	22	249° 20'
2	20	256° 40'
	18	264°
	16	271° 20'
	14	278° 40'
	12	286°
1	10	293° 20'
	8	300° 40'
	6	308°
	4	315° 20'
	2	322° 40'
0	0	330°

METRIC EQUIVALENTS

INCHES	MM	INCHES	MM
.001	.03	.38	9.65
.002	.05	.424	10.77
.005	.13	.44	11.18
.045	1.14	.444	11.28
.06	1.52	.465	11.81
.07	1.80	.500	12.70
.09	2.29	.62	15.75
.094	2.41	.625	15.88
.10	2.54	.656	16.66
.108	2.74	.687	17.45
.125	3.18	.75	19.05
.19	4.83	1.00	25.40
.223	5.66	1.50	38.10
.253	6.43		
.31	7.87		

NOTES:

1. Dimensions. In inches.
2. Tolerances. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals, ±.02 (.51 mm) for two place decimals, and ±0° 30' on angles.
3. Weight. .45 ounces maximum.
4. Material. Insert: Brass in accordance with QQ-B-626.
   Knob: Thermoplastic or Aluminum alloy.
   Dial: Acrylic plastic in accordance with MIL-F-5425 Finish A, or Thermoplastic material.
5. Finish. Insert: Nickel plate in accordance with QQ-N-290, grade G, class 2.
   Knob and Dial: Bottom surface of illuminated knobs shall have no coating and shall be polished.
6. Color. Unless otherwise specified, colors shall be in accordance with FED-STD-595.
   Knob and Dial: Gray lusterless, color number 36231.
   Black lusterless, color number 37038.
   Metal, natural-anodize in accordance with MIL-A-8625.
   Indicia: White lusterless, color number 37875.
   Reflection may be reduced to 50% minimum.
   Markings shall meet a daylight contrast of 9 minimum.
   Black lusterless, color number 37038 for anodized knobs.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
9. Metric equivalents (to the nearest .01 mm) are given for information only and are based on 1 inch = 25.4 mm.

APPROVED 11 MAY 1973 REVISED (F) FOR CHANGES SEE SHEET 1

User Activities:
Review Activities:
DLA - IS
This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A 11 Other Cust	TITLE: KNOB-RADIAL INDICATOR, ILLUMINATED AND NON-ILLUMINATED	MILITARY STANDARD MS21383(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.