
FED. SUP CLASS
1670

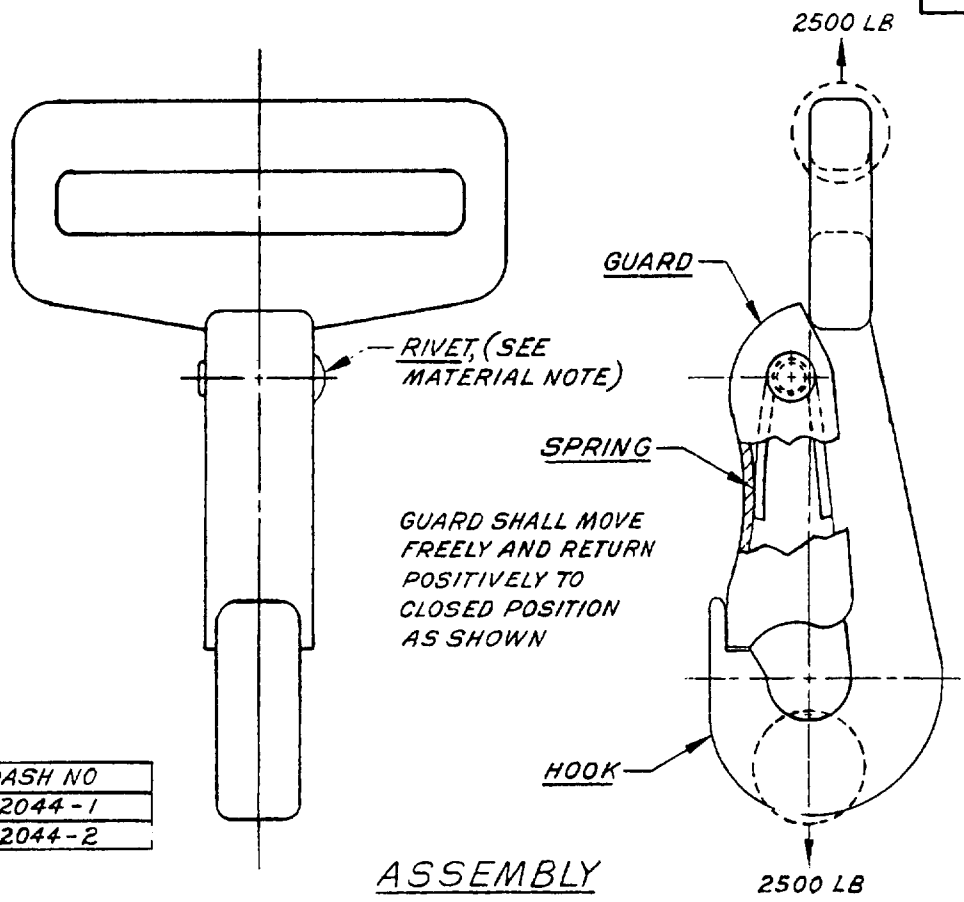

DASH NO
22044-1
22044-2

ASSEMBLY

NOTES:

1. MATERIAL: HOOK - STEEL, MIL-S-5626 OR MIL-S-6049.
   GUARD - STEEL, ASTM A 659 COMMERCIAL QUALITY
   SPRING - STEEL, QQ-W-470.
   RIVET - CORROSION-RESISTANT, FF-R-556, TYPE XII, CLASS 3, GRADE C, DIAMETER AND LENGTH TO SUIT.
2. METHOD OF FORMING: HOOK, HOT FORGE.
3. HEAT TREATMENT: HOOK - HEAT TREAT 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
4. FINISH: HOOK, SPRING AND GUARD BEFORE ASSEMBLY -
   -1, CADMIUM PLATE QQ-P-416, CLASS 1, TYPE I.
   -2, COATING, IMMERSION ZINC FLAKE/CHROMATE DISPERSION PER MIL-C-87115, CLASS 3 (B)
5. DIMENSIONS IN INCHES: EXCEPT AS OTHERWISE SPECIFIED HEREIN, TOLERANCES: DECIMALS, ± .03, ANGLES ± 2°.
6. PROOF LOAD: HOOK SHALL BE SUBJECTED TO THE PROOF LOAD SPECIFIED AND AS INDICATED BY ARROWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.
7. SNAP HOOK ASSEMBLY SHALL PASS FREELY OVER A .281 DIAMETER ROD.
8. SURFACE ROUGHNESS, UNLESS OTHERWISE SPECIFIED HEREIN, SHALL BE 125 MAX. IN ACCORDANCE WITH ANSI B46.1.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
11. FOR CRITICAL DIMENSIONS AND CRITICAL FUNCTIONAL TEST APPLICABLE TO END ITEM INSPECTION: SEE SHEET 3 (B)

(A) ENTIRE STANDARD REVISED
APPROVED 12 MAY 61 REVISED (A) 10 MAY 74 (B) 28 DEC 83

USER ACTIVITIES
NAVY - MC

REVIEW ACTIVITIES
ARMY - AV
USAF - 11

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. GL	TITLE	MILITARY STANDARD
Other Cust A5 99	SNAP HOOK-COILED SPRING, PARACHUTE	MS 22044
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AN6516	SHEET 1 OF 3

DD FORM 1 SEP 87 672-1


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS 1670

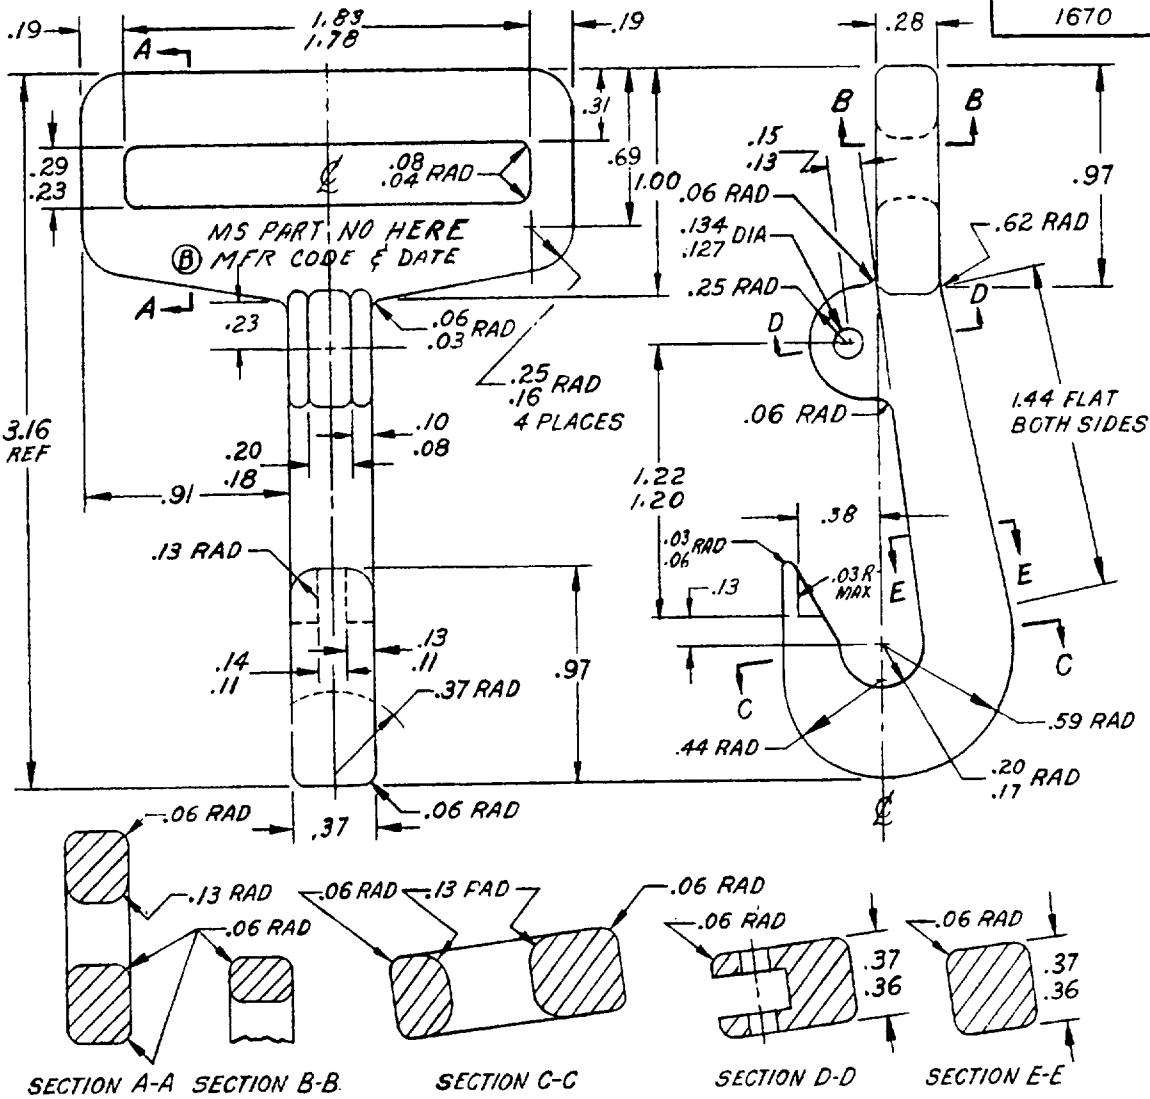

SECTION A-A SECTION B-B SECTION C-C SECTION D-D SECTION E-E

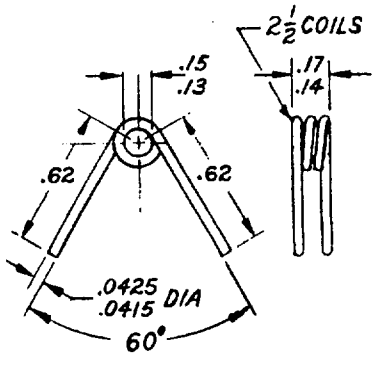

SPRING

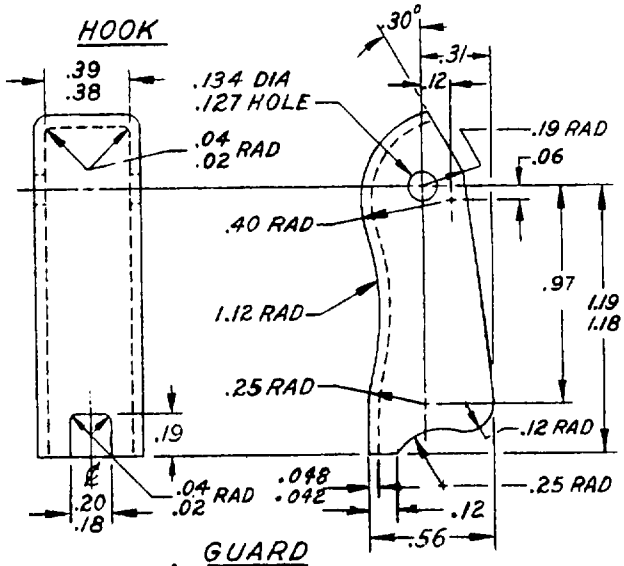

GUARD

APPROVED 12 MAY, 61 REVISED (B) FOR CHANGES SEE PAGES 1, 2 AND 3

P.A. GL Other Cust AS 99	TITLE SNAP HOOK-COILED SPRING, PARACHUTE	MILITARY STANDARD MS 22044
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 57 672-1


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

END ITEM EXAMINATION

CRITICAL DIMENSIONS - CRITICAL FUNCTION TESTS

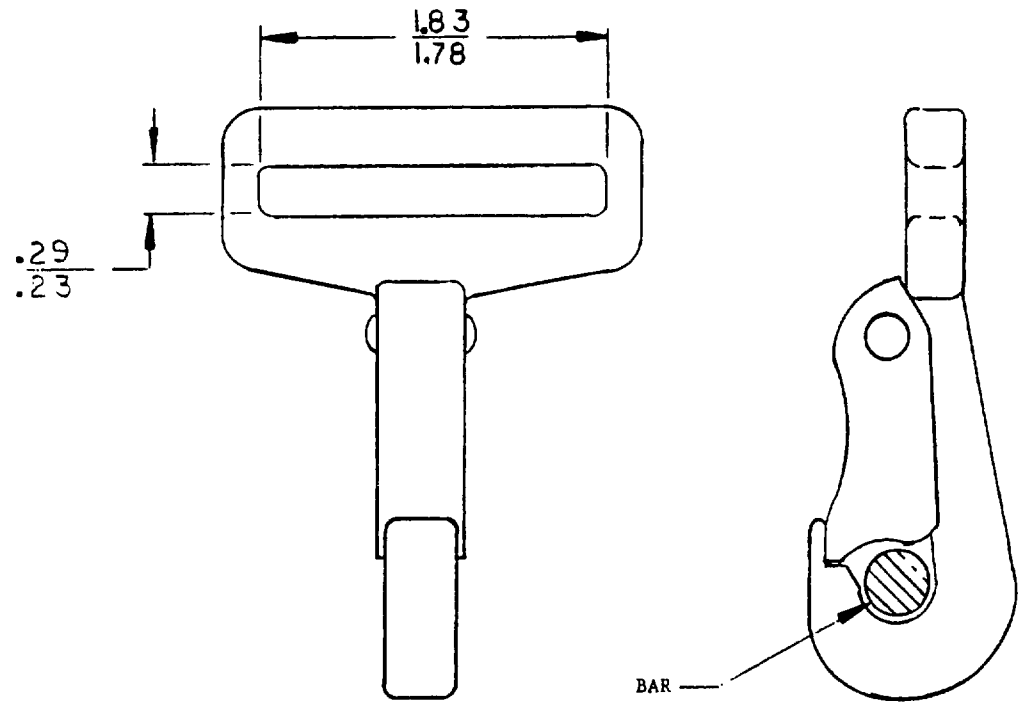

CRITICAL DIMENSIONS: As Shown

CRITICAL FUNCTIONAL TEST: Snap hook assembly shall pass freely over a .281 dia. rod. Guard shall move freely and snap shut under spring load.

APPROVED 28 DEC 83 REVISED

P.A. GL Other Cust AS GL	INTERNATIONAL INTEREST	TITLE SNAP HOOK-COILED SPRING, PARACHUTE	MILITARY STANDARD MS22044
Procurement Specifications MIL-H-7195	SUPERSEDES:		SHEET 3 OF 3

DD FORM 1 MAY 73 672 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.