FED. SUP CLASS
5930

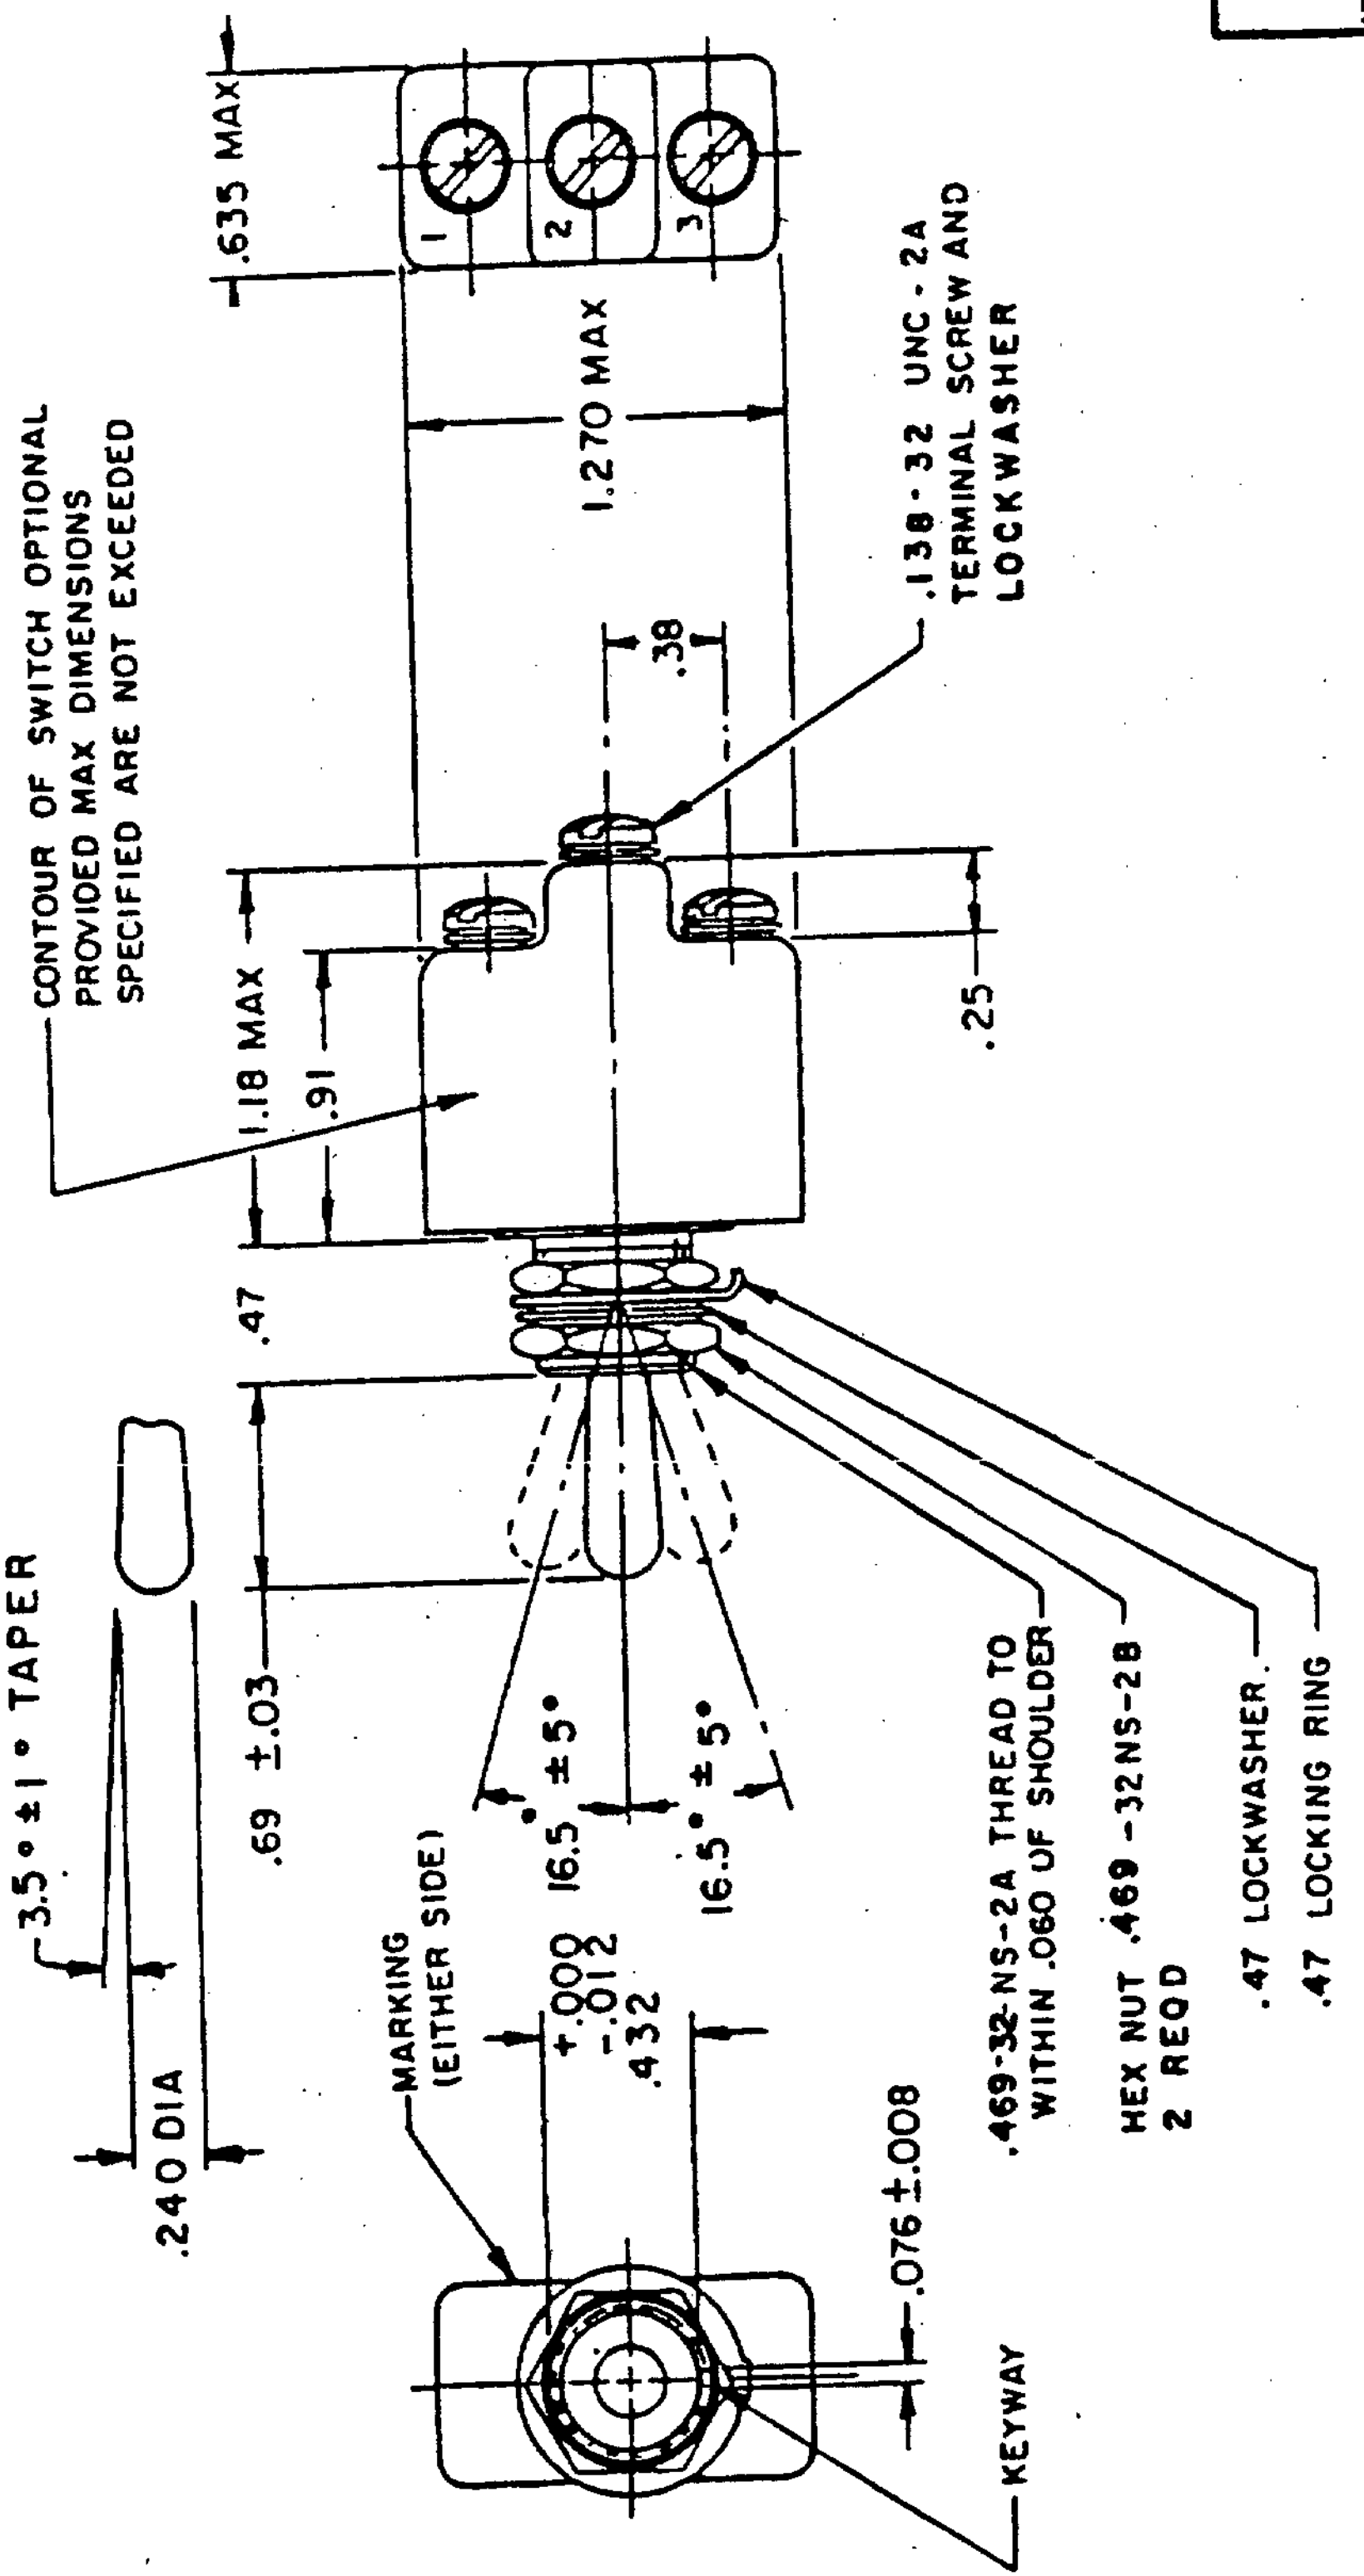

.635 MAX
1
2
3
1.270 MAX
.138-32 UNC-2A TERMINAL SCREW AND LOCKWASHER
.38
CONTOUR OF SWITCH OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED
1.18 MAX
.91
.25
.47
3.5° ±1° TAPER
.69 ±.03
.240 DIA
MARKING (EITHER SIDE)
16.5° ±5°
16.5° ±5°
+.000
-.012
.432
.469-32 NS-2A THREAD TO WITHIN .060 OF SHOULDER
HEX NUT .469-32 NS-2B 2 REQD
.47 LOCKWASHER
.47 LOCKING RING
.076 ±.008
KEYWAY

(H) Denotes changes

APPROVED 31 Jul 1958 REVISED (D) 20 Apr 1967 (E) 16 Sep 1969 (F) 22 Apr 1971 (G) 17 May 1977 (H) 28 Sep 1987

User activity: Air Force - 11

Review activities:
Army - AV
Navy - EC
Air Force - 99
DLA - ES

is military standard is approved for use by all Departments and Agencies of the epartment of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, ONE POLE, ENVIRONMENTALLY SEALED	MILITARY STANDARD MS24523
Procurement Specification MIL-S-3950		SUPERSEDES:	PAGE 1 OF 3

5930-1358-01

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5930

Inches	mm	Inches	mm
.005	0.13	.25	6.4
.008	0.20	.38	9.7
.012	0.30	.432	10.97
.02	0.5	.469	11.91
.03	0.8	.47	11.9
.060	1.52	.635	16.13
.076	1.93	.69	17.5
.138	3.51	.91	23.1
.240	6.10	1.18	30.0
		1.270	32.26

NOTES:

1. Dimensions are inches.
Ⓗ 2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. For hardware and terminal screw detail specifications, see appendix of MIL-S-3950.
5. Thread length and hole depth should be such that screws will not bottom when tightened.
6. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.
7. Maximum weight is .20 pound.
Ⓗ 8. In event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
Ⓗ 9. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

User activity: Air Force - 11

Review activities: Army - AV
Navy - EC
Air Force - 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 31 Jul 1958 REVISED Ⓗ For changes see page 2.

P.A
Air Force - 85
Other Cust
Army - ER
Navy - AS

International interest

TITLE
SWITCH, TOGGLE, ONE POLE,
ENVIRONMENTALLY SEALED

MILITARY STANDARD
MS24523

Procurement Specification
MIL-S-3950

SUPERSEDES:

PAGE 2 OF 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity: Air Force - 11

FED. SUP CLASS
5930

Detail requirements:

MS part number	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS24523-21	1-2 On	Off	2-3 On	5	20	15	3	15	10
MS24523-22	Off	None	2-3 On						
MS24523-23	1-2 On	None	2-3 On						
MS24523-24	None	Off	2-3 On						
MS24523-25	None	Mom. off	2-3 On	4	15	10	2	15	7
MS24523-26	1-2 Mom. on	None	2-3 On						
MS24523-27	1-2 Mom. on	Off	2-3 Mom. on						
MS24523-28	1-2 Mom. on	Off	None						
MS24523-29	Mom. off	None	2-3 On						
MS24523-30	1-2 Mom. on	None	Off						
MS24523-31	1-2 Mom. on	Off	2-3 On						
MS24523-32	None	On 1-2	2-3 Mom. on						
MS24523-33	None	On 1-2	2-3 On	5	20	15	3	15	10

APPROVED 31 Jul 1958 REVISED (H) For changes see page 2.

P.A
Air Force - 85
Other Cust
Army - ER
Navy - AS

International Interest

TITLE

SWITCH, TOGGLE, ONE POLE,
ENVIRONMENTALLY SEALED

MILITARY STANDARD

MS24523

Procurement Specification
MIL-S-3950

SUPERSEDES:

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1987-505-035/73830