This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMSC N/A

P.A	International interest	Procurement Specification
Air Force-85 Other Cust Army-ER Navy-AS	ASCCAS 12/16A	MIL-S-8834

SUPERSEDES: MS0025308(USAF)


TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES

MILITARY STANDARD

MS 25308

PAGE 1 OF 4

Ⓙ Denotes change

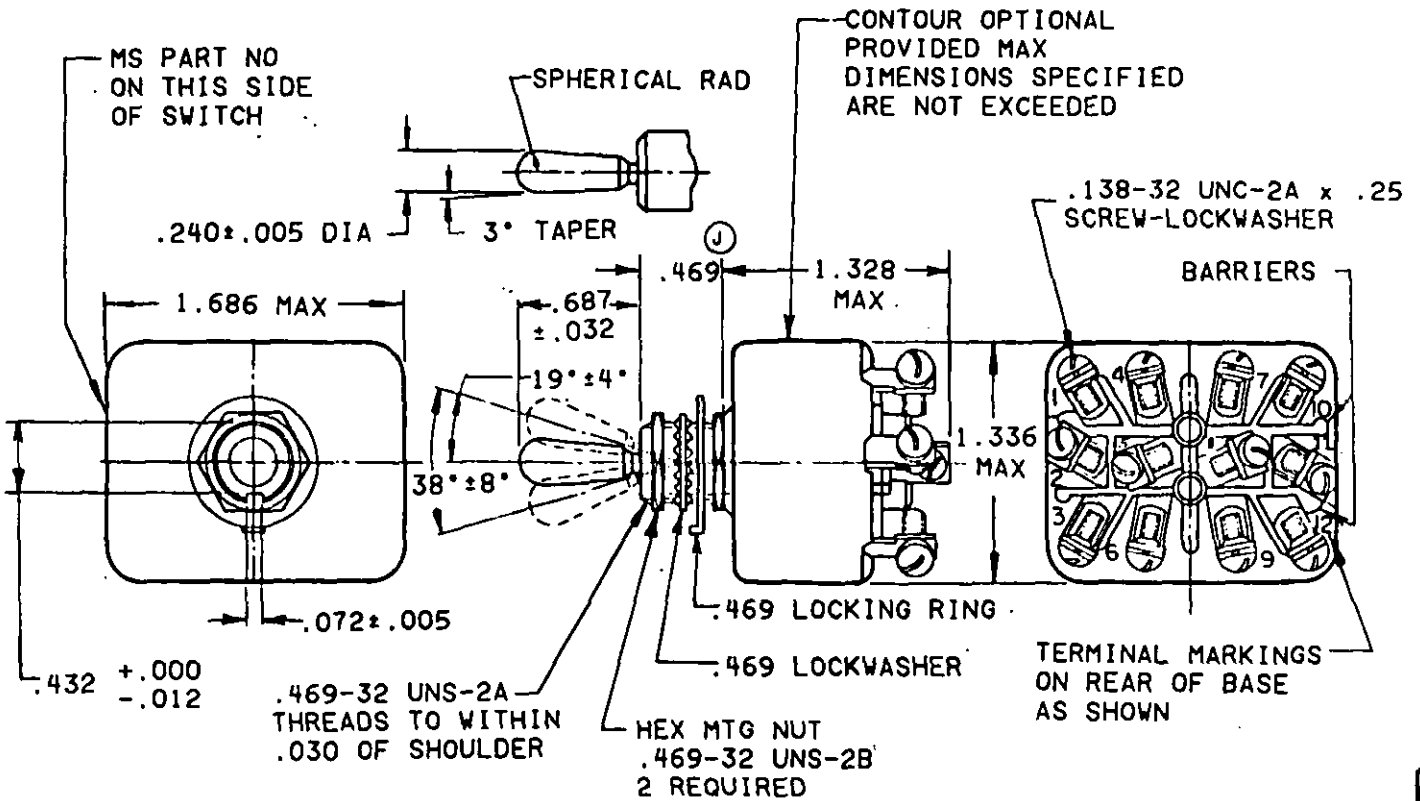

FED. SUP CLASS 5930

APPROVED 28 Aug 58 REVISED Ⓓ 11 Jul 72 Ⓔ 24 Jul 73 Ⓕ 23 Aug 76 Ⓖ 20 Mar 81 Ⓗ 18 Oct 85 Ⓙ 30 SEP 86

5930-1331-09

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A Air Force-85
Other Cust Army-ER Navy-AS

Procurement Specification MIL-S-8834

International Interest ASCCAS 12/16A

TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES

SUPERSEDES: MS0025308(USAF)

MS 25308

MILITARY STANDARD

PAGE 2 OF 4

FED. SUP CLASS 5930

DETAIL REQUIREMENTS:

MS DASH NO. (ENVIRON-MENTAL SEALED)	CIRCUIT MADE BETWEEN TERMINALS AS INDICATED WITH THE TOGGLE LEVER IN THESE POSITIONS:			CURRENT CAPACITY AMPERES PER POLE 28 VOLTS DC 1/			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 400 HERTZ 1/			CURRENT CAPACITY AMPERES PER POLE 115 VOLTS 60 HERTZ 1/			LIFE LOW CURRENT LEVEL SWITCHING	SUPERSEDED DASH NUMBER
	OPPOSITE KEYWAY SIDE	CENTER POSITION	KEYWAY SIDE	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	30 mV	TOGGLE SEALED
-212		OFF	ON 1-2,4-5 7-8,10-11											-211
-222		NONE	OFF											-221
-232	ON 2-3,5-6 8-9,11-12		ON 1-2,4-5 7-8,10-11											-231
-242		OFF	NONE											-241
-262		NONE												-261
-272	MOM-ON 2-3,5-6 8-9,11-12	OFF	MOM-ON 1-2,4-5 7-8,10-11	7	25	15	7	25	15	7	20	15	10 mA	-271
-282	NONE													-281
-292	ON 2-3,5-6 8-9,11-12	NONE	MOM-OFF											-291
-302	OFF		MOM-ON 1-2,4-5 7-8,10-11											-301
-312	ON 2-3,5-6 8-9,11-12	OFF												-311

1/ Application information ratings at room temperature.

APPROVED 28 Aug 58

REVISED (J) For changes see pages: 1 & 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

(J)

DETAIL REQUIREMENTS:

MS DASH NO. ENVIRONMENTAL SEALED	CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS 60 HERTZ AC			CURRENT CAPACITY 1/ AMPERES PER POLE 125 VOLTS DC			CURRENT CAPACITY 1/ AMPERES PER POLE 250 VOLTS DC			LIFE LOW CURRENT LEVEL SWITCHING 30 mV	SUPERSEDED DASH NUMBER
	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT		TOGGLE SEALED
-212											-211
-222											-221
-232											-231
-242											-241
-262											-261
-272		10	7		750 mA	-		500 mA	-	10 mA	-271
-282											-281
-292											-291
-302											-301
-312											-311

1/ Application information ratings at room temperature.

APPROVED 28 Aug 58 REVISED (J) For changes see pages 1 & 3

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A	International Interest	TITLE	MILITARY STANDARD
Air Force-85 Other Cust Army-ER Navy-AS	ASCCAS 12/16A	SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES	MS 25308
Procurement Specification MIL-S-8834		SUPERSEDES:	PAGE 3 OF 4

Downloaded from https://assist.dla.mil at 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm
.005	0.13	.25	6.35
.012	0.30	.432	10.67
.030	0.76	.469	11.91
.032	0/81	.687	17.45
.072	1.83	1.328	33.73
.138	3.51	1.336	33.93
.240	6.10	1.686	42.82

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware and terminal screw detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. The MS dash numbers supersede and are completely interchangeable with the superseded dash numbers.
8. Example of part numbers:
   MS25306-212 = ON-OFF-ON, environmentally sealed switch.
   MS25306-272 = MOM-ON, OFF, MOM-ON environmentally sealed switch.
9. Maximum weight: .1252 pound (57.2 grams).
10. Altitude requirements: 80,000 feet.
11. 115 V ac, 60 hertz electrical endurance tests are to be performed at room temperature and pressure.

APPROVED 28 Aug 58 REVISED (J) For changes see pages 1 & 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

P.A	International interest	TITLE	MILITARY STANDARD
Air Force-85 Other Cust Army-ER Navy-AS	ASCCAS I2/16A	SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SCREW TERMINAL, FOUR POLE, .469 MOUNTING BUSHING, 25 AMPERES	MS 25308
Procurement Specification MIL-S-8834		SUPERSEDES: MS0025308(USAF)	PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:08Z
Check the source to verify that this is the current version before use.