INCH-POUND


MS27069H
31 May 2017
SUPERSEDING
MS27069G
w/AMENDMENT 1
14 March 2013

DETAIL SPECIFICATION SHEET

SOCKET, HOSE COUPLING

This specification sheet is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27272.

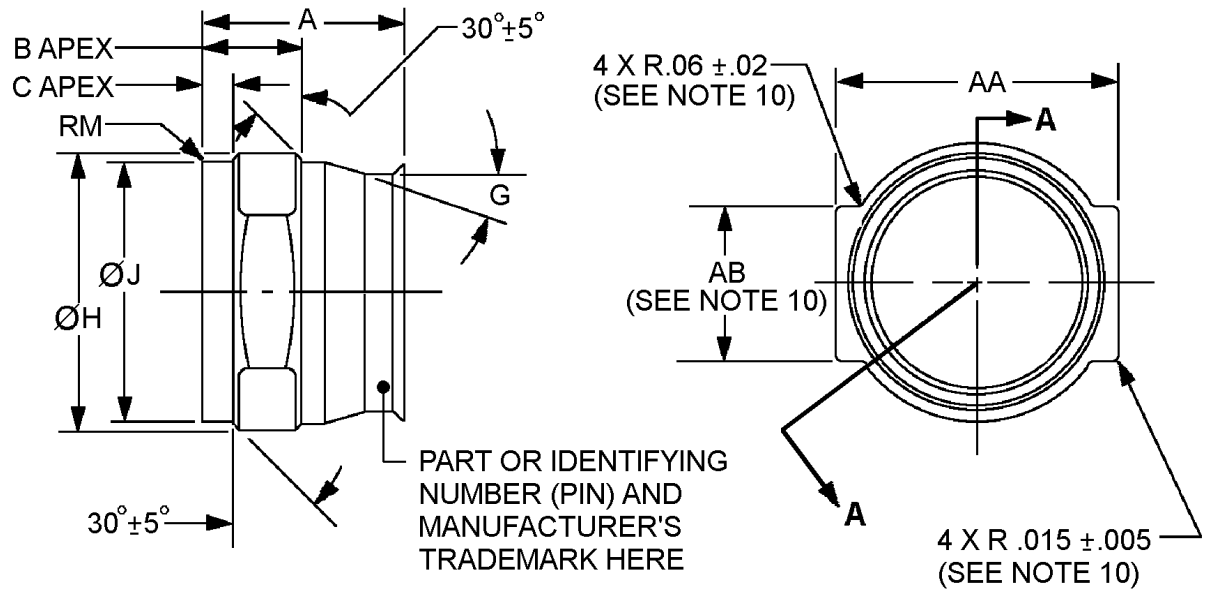


See notes at end of figure.

FIGURE 1. Socket dimensions and configuration.


AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

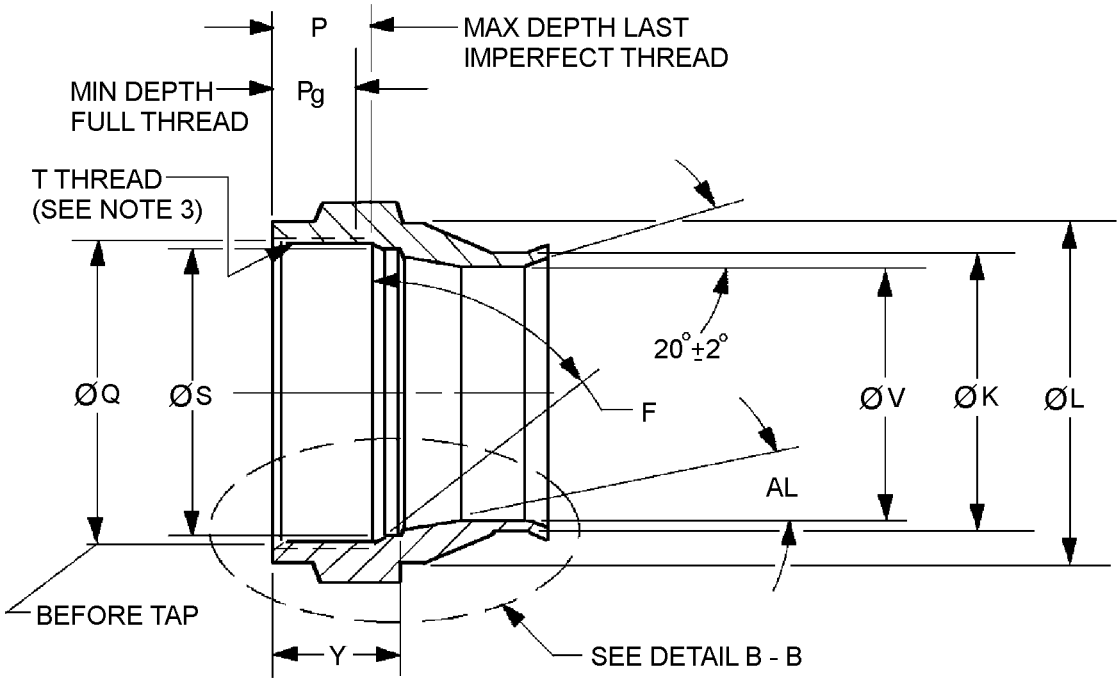

SECTION A - A ENLARGED

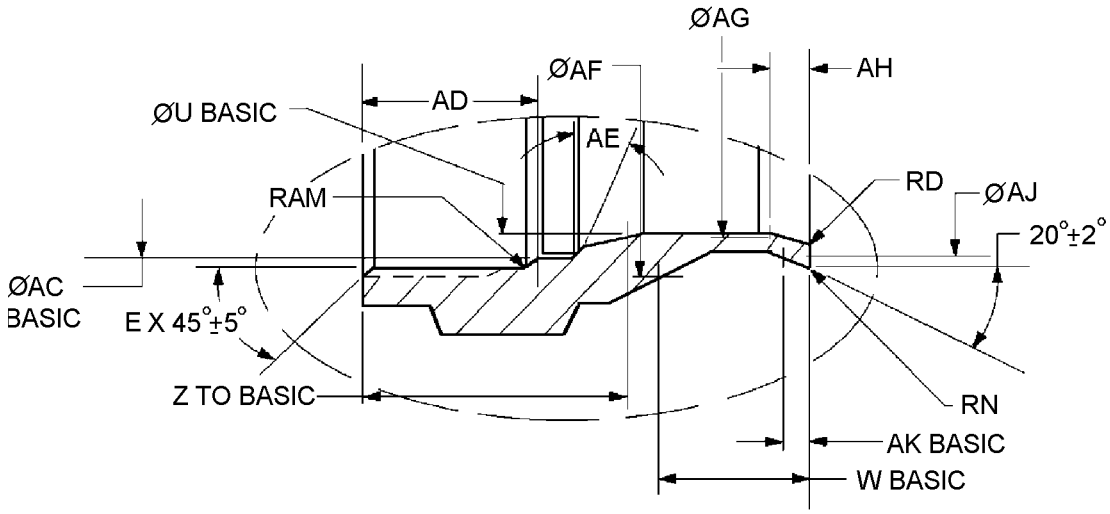

DETAIL B -B ENLARGED

See notes at end of figure.

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

Dash size	Tube size inches (mm)	A inches (mm) ±.010 (0.25	B inches (mm) ±.010 (0.25)	C inches (mm) ±.010 (0.25)	D inches (mm) ±.005 (0.13)	E inches (mm)		F ±2º	G ±.5º
-4	.250 (6.35)	.806 (20.47)	.385 (9.78)	.120 (3.05)	.015 (0.38)	.030 (0.76)	±.005 (0.13)	30°	15.5°
-5	.313 (7.95)	.834 (21.18)				.031 (.79)	±.015 (0.38)		14.5°
-6	.375 (9.53)	.853 (21.67)	.400 (10.16)	.110 (2.79)					14.0°
-8	.500 (12.70)	.979 (24.87)	.440 (11.18)	.160 (4.06)					17.0°
-10	.625 (15.88)	1.080 (27.43)	.505 (12.83)	.190 (4.83)	.020 (0.51)				18.0°
-12	.750 (19.05)	1.152 (29.26)	.540 (13.72)	.200 (5.08)		.035 (0.89)	±.005 (0.13)	60°	16.0°
-16	1.000 (25.40)	1.255 (31.88)	.655 (16.64)	.185 (4.70)		.040 (1.02)		45°	20.0°
-20	1.250 (31.75)	1.510 (38.35)	.815 (20.70)	.235 (5.97)				30°	23.0°
-24	1.500 (38.10)	1.582 (40.18)	.900 (22.86)	.250 (6.35)				45°	22.0°

Dash size	H dia. inches (mm) ±.005 (0.13)	J dia. inches (mm) ±.005 (0.13)	K dia. inches (mm) ±.005 (0.13)	L dia. inches (mm) ±.005 (0.13)	M inches (mm)	N inches (mm)	P max inches (mm)	P_g min inches (mm)
-4	.562 (14.27)	.558 (14.17)	.440 (11.18)	.558 (14.17)	.010 (0.25) ±.005 (0.13)	.030 (0.76) max	.310 (7.87)	.210 (5.33)
-5	.625 (15.88)	.620 (15.75)	.514 (13.06)	.620 (15.75)			.335 (8.51)	.235 (5.97)
-6	.688 (17.48)	.683 (17.35)	.582 (14.78)	.683 (17.35)			.320 (8.13)	.215 (5.46)
-8	.875 (22.23)	.870 (22.10)	.700 (17.78)	.870 (22.10)	.030 (0.76) max		.365 (9.27)	.235 (5.97)
-10	1.000 (25.40)	.995 (25.27)	.822 (20.88)	.995 (25.27)		.015 (0.38) ±.005 (0.13)	.410 (10.41)	.270 (6.86)
-12	1.125 (28.58)	1.120 (28.45)	.942 (23.93)	1.120 (28.45)			.435 (11.05)	.360 (9.14)
-16	1.500 (38.10)	1.495 (37.97)	1.270 (32.26)	1.495 (37.97)			.490 (12.45)	.380 (9.65)
-20	1.875 (47.63)	1.870 (47.50)	1.520 (38.61)	1.870 (47.50)			.695 (17.65)	.495 (12.57)
-24	2.125 (53.98)	2.120 (53.85)	1.816 (46.13)	2.120 (53.85)			.782 (19.86)	.607 (15.42)

See notes at end of figure.

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

Dash size	Q dia. inches (mm)		S dia. +.000 -.005 (0.13) inches (mm)	T (See note 3)	
				Thread	Pitch diameter inches (mm)
-4	.461 (11.71)	.007/-.000 (+0.18/-0.00)	---	.5000 - 28 UNEF - 3B	.4804/.4768 (12.202/12.111)
-5	.517 (13.13)		---	.5625- 24 UNEF -3B	.5392/.5354 (13.696/13.599)
-6	.580 (14.73)		---	.6250 - 24 UNEF -3B	.6018/.5979 (15.286/15.187)
-8	.705 (17.91)	+.005-.000 (+0.13/-0.00)	---	.7500 - 24 UNS -3B	.7269/.7229 (18.463/18.362)
-10	.821 (20.85)	+.008/-.000 (+0.20/-0.00)	---	.8750 - 20 UNEF -3B	.8468/.8425 (21.509/21.400)
-12	.946 (24.03)		---	1.0000 - 20 UNEF -3B	.9719/.9675 (24.686/24.575)
-16	1.315 (33.40)		1.225 (31.12)	1.3750 - 18 UNEF - 3B	1.3436/1.3389 (34.127/34.008)
-20	1.627 (41.33)	.009/-.000 (+0.23/-0.00)	1.500 (38.10)	1.6875 - 18 UNEF - 3B	1.6563/1.6514 (42.070/41.946)
-24	1.870 (47.50)	+.008/-.000 (+0.20/-0.00)	1.815 (46.10)	1.9375 - 16 UN - 3B	1.9021/1.8969 (48.313/48.181)

Dash size	U dia. Inches (mm)	V dia. inches (mm)		W inches (mm)	Y inches (mm) ±.005 (0.13)	Z inches (mm)	
-4	.3785 (9.614)	.348 (8.84)	+.005/-.000 (+0.13/-0.00)	.1826 (4.638)	---	.436 (11.07)	+.013 /-.000 (+0.33/-0.00)
-5	.4410 (11.201)	.411 (10.44)		.2035 (5.169)	---	.447 (11.35)	±.006 (0.15)
-6	.5030 (12.776)	.478 (12.14)	+.006/-.000 (+0.15/-0.00)	.2403 (6.104)	---	.430 (10.92)	+.013 /-.000 (+0.33/-0.00)
-8	.6195 (15.735)	.590 (14.99)	+.005-.000 (+0.13/-0.00)	.2169 (5.509)	---	.527 (13.39)	+.011 /-.000 (+0.28/-0.00)
-10	.7245 (18.406)	.692 (17.58)	+.006/-.000 (+0.15/-0.00)	.2423 (6.154)	---	.592 (15.04)	.007 /-.000 (+0.18 /-0.00)
-12	.8665 (22.009)	.825 (20.96)	.007/-.000 (+0.18/-0.00)	.2738 (6.955)	---	.631 (16.03)	±.004 (0.10)
-16	1.1700 (29.718)	1.140 (28.96)	+.005/-.000 (+0.13/-0.00)	.4009 (10.183)	.648 (16.46)	.756 (19.20)	+.009/-.000 (+0.23/-0.00)
-20	1.4425 (36.640)	1.390 (35.31)		.4480 (11.379)	.905 (22.99)	.994 (25.25)	±.008 (0.20)
-24	1.7185 (43.650)	1.713 (43.51)	±.005 (0.13) (+0.13/-0.00)	.4538 (11.527)	.942 (23.93)	1.101 (27.97)	±.005 (0.13)

See notes at end of figure.

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

Dash size	AA inches (mm) ±.005 (0.13)	AB inches (mm) ±.015 (0.38)	AC dia. inches (mm)	AD inches (mm) ±.005 (0.13)	AE	AF dia. inches (mm) ±.005 (0.13)
-4	.562 (14.27)	.325 (8.26)	.4362 (11.079)	.328 (8.33)	---	.450 (11.43)
-5	.625 (15.88)	.361 (9.17)	.4928 (12.517)	.353 (8.97)	---	.525 (13.34)
-6	.688 (17.48)	.397 (10.08)	.5560 (14.122)	.338 (8.59)	---	.601 (15.27)
-8	.875 (22.23)	.505 (12.83)	.6832 (17.353)	.385 (9.78)	---	.713 (18.11)
-10	1.000 (25.40)	.578 (14.68)	.8008 (20.340)	.427 (10.85)	---	.844 (21.44)
-12	1.125 (28.58)	.650 (16.51)	.9295 (23.609)	.463 (11.76)	---	.969 (24.61)
-16	1.500 (38.10)	.866 (22.00)	1.2708 (32.278)	.524 (13.31)	3° max	1.397 (35.48)
-20	1.875 (47.63)	1.082 (27.48)	1.5645 (39.738)	.786 (19.96)	3° ±2°	1.710 (43.43)
-24	2.125 (53.98)	1.227 (31.17)	1.8432 (46.817)	.827 (21.01)		1.993 (50.62)

Dash size	AG dia. inches (mm)	AH inches (mm) ±.010 (0.25)	AJ dia. inches (mm) ±.005 (0.13)	AK inches (mm)	AL ±.25º	AM max inches (mm)
-4	.3878 (9.850)	.051 (1.30)	.450 (11.43)	.0545 (1.384)	9°	---
-5	.4568 (11.603)	.059 (1.50)	.525 (13.34)	.0552 (1.402)	8°	---
-6	.5290 (13.437)	.066 (1.68)	.601 (15.27)	.0668 (1.697)		---
-8	.6362 (16.159)	.060 (1.52)	.713 (18.11)	.0579 (1.471)		---
-10	.7500 (19.050)	.075 (1.91)	.844 (21.44)	.0567 (1.440)	9°	---
-12	.8818 (22.397)	.073 (1.85)	.969 (24.61)	.0647 (1.643)	8°	---
-16	1.2038 (30.577)	.084 (2.13)	1.298 (32.97)	.0649 (1.648)	7°	---
-20	1.4488 (36.800)		1.545 (39.24)	.0615 (1.562)	8°	---
-24	1.7424 (44.257)	.079 (2.01)	1.849 (46.96)	.0426 (1.082)	6°	.015 (0.38)

See notes at end of figure.

FIGURE 1. Socket dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Threads shall be in accordance with MIL-S-7742.
4. Remove all burrs and slivers.
5. Unless otherwise specified, surface roughness shall not exceed 125µ inch (3.18µm) R_a in accordance with ASME B46.1.
6. Unless otherwise specified, break or radius all corners .005, +.005, -.000 (0.13, +0.13, -0.00 mm).
7. All diameters must be concentric within .005 inch (0.13 mm) full indicator movement.
8. Apex dimension is for the highest point.
9. Basic dimensions are used to designate the critical design dimensions of a part.
10. Socket may be either a 2-sided or hex design. Radius is not applicable for hex socket.

FIGURE 1. Socket dimensions and configuration - Continued.

REQUIREMENTS

Dimensions and configuration shall be as specified on figure 1.

Intended use. This part is a component of MS27053 through MS27060 and MS27381 through MS27385.

In house qualification: Qualified sources for MS27053 through MS27060 and MS27381 through MS27385 that meet the qualification testing requirements in MIL-DTL-27272 require no further testing for the hose coupling socket.

Subcontracted manufacturers qualification of hose coupling socket only: The hose coupling socket shall be installed on a qualified connector and shall be subjected to the tests below in accordance with MIL-DTL-27272, reference periodic P1 and P2 testing in MIL-DTL-27272. Sample size, if qualifying all connector configurations, shall be performed on six fittings (three assemblies) for each size.

Examination of product
Proof pressure
Leakage pressure
Room-temperature
burst pressure
Over-tightening torque

Material: Corrosion-resistant steel (CRES), class 304, condition B, in accordance with ASTM A276/A276M or CRES in accordance with SAE-AMS5639, while meeting the properties below.

Minimum yield strength:	60,000 psi (414 MPa) on -4C through -12C 50,000 psi (345 MPa) on -16C 45,000 psi (310 MPa) on -20C and -24C.

Finish: Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7.

Lubrication: Threads on -8C through -24C shall be lubricated with solid-film lubricant, no overspray allowed, see table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.


TABLE I. Solid film designator.

Dry film designator	SAE class or type designator	Dry film characteristics
Blank	Any SAE class or type below	N/A
SAE-AS1701	SAE-AS1701 class	SAE-AS1701 temperature ranges °F (°C)
4	4	-65° to +1400°F (-54° to 760°C)
5	5	-65° to +850°F (-54° to 454°C)
6	6	-375° to +850°F (-226° to 454°C)
SAE-AS5272	SAE-AS5272 type	SAE-AS5272 temperature ranges. °F (°C)
7	Type I	-90° to 400°F (-68° to 204°C) endurance life of 250 min minimum
8	Type II	-90° to 400°F (-68° to 204°C) endurance life of 450 min minimum
9	Type III	Color 1 - Natural product color -90° to 400°F (-68° to 204°C) low Volatile organic compound with an endurance life of 450 min minimum
10	Type III	Color 2 - Black color -90° to 400°F (-68° to 204°C) low Volatile organic compound with an endurance life of 450 min minimum
Dry film designator	MIL classification	Dry film characteristics
MIL-PRF-46010 1/	---	MIL-PRF-46010 temperature ranges. °F (°C)
11	1	Color 1 natural product color, -90° to 400°F (-68° to 204°C) solvent resisting
12	2	Color 2 - Black color -90° to 400°F (-68° to 204°C) solvent resisting

1/ Not for aerospace usage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

PIN: The PIN consists of the MS prefix, specification sheet number, dash size, material code, and a dry film number. Unassigned PIN's shall not be used.

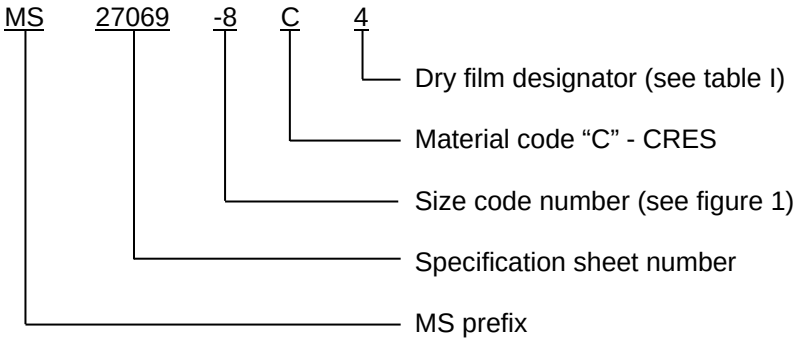

Example: MS27069-8C4 indicates: .500 inch tube OD, socket to hose coupling fitting, corrosion resistant steel, with dry film class designator 4.

Marking: Marking shall be permanent and shall include the PIN and manufacturer's trademark. Marking shall be applied directly to the visible surface, see figure 1, of the fitting by laser, etching or metal stamping. The marking may be applied in any order.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-DTL-27272, this document references the following:

MIL-PRF-46010	MS27058	MS27385
MIL-S-7742	MS27059	ASME B46.1
MS27053	MS27060	ASTM A276/A276M
MS27054	MS27381	SAE-AMS2700
MS27055	MS27382	SAE-AMS5639
MS27056	MS27383	SAE-AS5272
MS27057	MS27384	SAE-AS1701

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2017-063)

Review activities:
Army - AR, AT, MI
Navy - MC, SA, SH
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:15Z
Check the source to verify that this is the current version before use.