This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document

Reviewers
Army - GL
Navy - YD
Air Force - 11, 69
DSA-IS

Users
WC, MO, CE

FED. SUP CLASS
5340

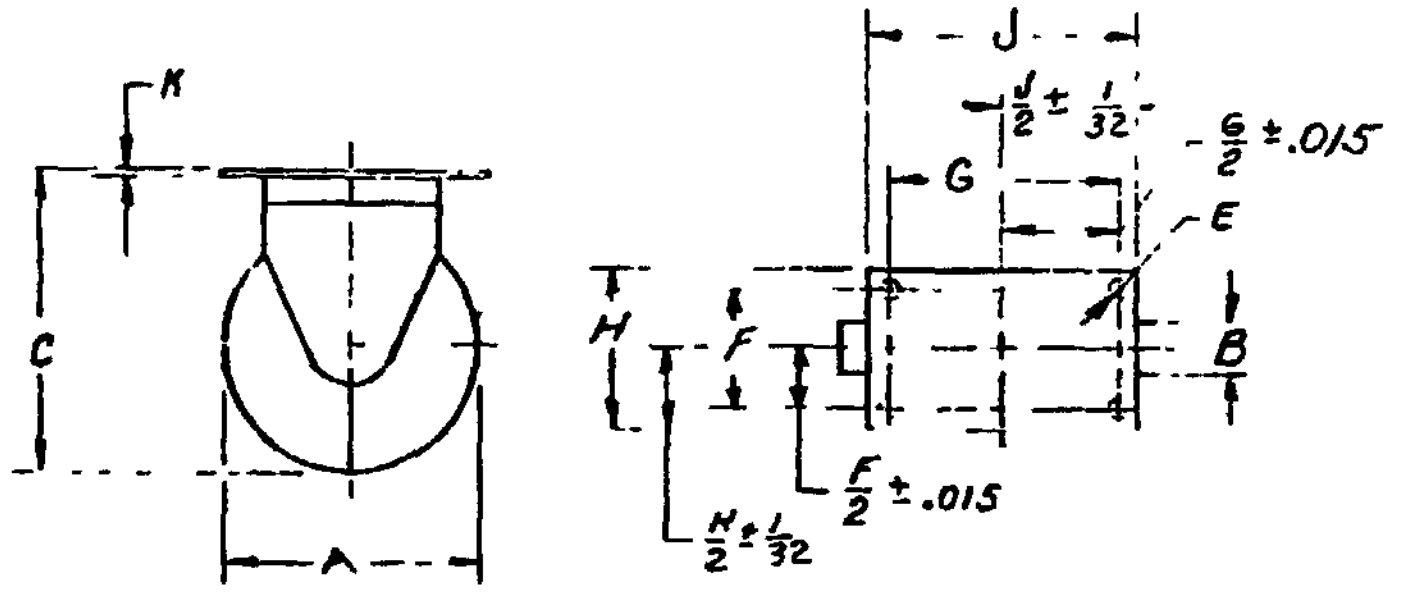
K
C
A
J
$\frac{J}{2} \pm \frac{1}{32}$
G
$\frac{G}{2} \pm .015$
E
H
F
B
$\frac{F}{2} \pm .015$
$\frac{H}{2} \pm \frac{1}{32}$

RIGID AND SWIVEL CASTER NONOFFSET

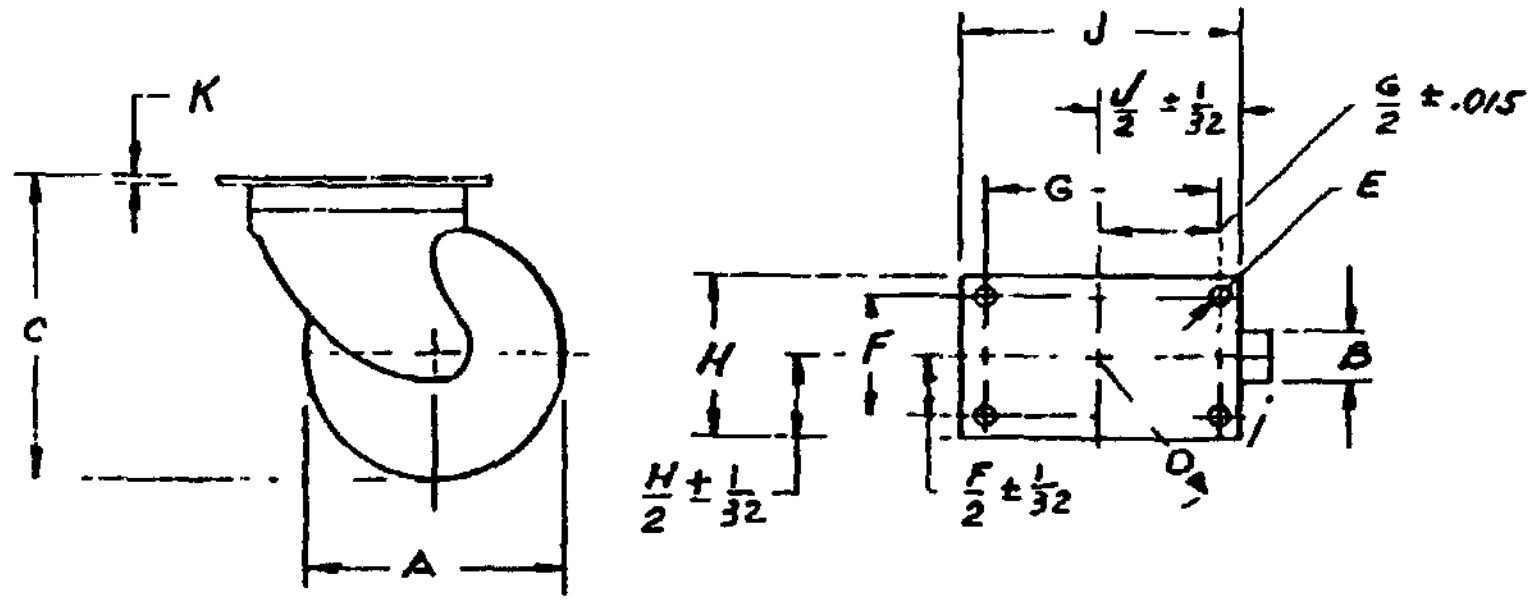
K
C
A
J
$\frac{J}{2} \pm \frac{1}{32}$
$\frac{G}{2} \pm .015$
G
E
H
F
B
$\frac{H}{2} \pm \frac{1}{32}$
$\frac{F}{2} \pm \frac{1}{32}$
O

SWIVEL CASTER OFFSET

DIMENSIONS IN INCHES:

FOLLOWING NOTES APPLY TO MS PART NUMBER TABLE (SEE SHEET 2 & 3)

(a) DASH NUMBERS -8, -10, -12, &-16 DESIGNATE THE WHEEL SIZE AS DESIGNATED BY COLUMN "A".

THE FIRST DASH LETTERS DESIGNATE THE TYPE OF WHEEL AS FOLLOWS:
S - SINGLE
D - DUAL

THE SECOND DASH LETTERS DESIGNATE THE STYLE OF CASTER AS FOLLOWS:
R - RIGID
N - SWIVEL NONOFFSET
W - SWIVEL OFFSET

THE THIRD DASH LETTERS DESIGNATE THE TYPE TIRE AS FOLLOWS:
C - CURED OR VULCANIZED ON TIRE
V - VULCANIZED DEMOUNTABLE TIRE

Ⓑ ADDITIONAL DASH LETTERS SHALL BE ADDED TO CASTERS, WHEN REQUIRED, TO DESIGNATE THE FOLLOWING:
P - STEERING PROVISIONS
Ⓑ B - BRAKES INSTALLED

(b) THE "B" TREAD WIDTH IS THE WIDTH OF EACH WHEEL ON THE CASTER, WHETHER THE CASTER IS OF SINGLE OR DUAL WHEEL CONSTRUCTION.

(c) APPLIES TO OFFSET SWIVEL CASTERS ONLY.

EXAMPLE OF PART NUMBER: MS27149-10SNVP: SIZE 10, SINGLE WHEEL NONOFFSET SWIVEL, VULCANIZED DEMOUNTABLE TIRE, STEERING PROVISIONS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Ⓑ For changes see sheets 1, 2, AND 3 Sheet 4 deleted.

APPROVED 14 SEP 61 REVISED Ⓐ 19 NOV. 1962 Ⓑ 3 SEP 65

P A Air Force - 11	TITLE
Other Cust Air Force - 11 Army - WC Navy - YD	CASTERS, RIGID AND SWIVEL, PRECISION, HEAVY DUTY
PROCUREMENT SPECIFICATION MIL-C-4731	SUPERSEDES MS24375

MILITARY STANDARD

MS 27149

SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense Selection for all new engineering design applications and for repetitive use shall be made from this document

Reviewers
Army - GL
Navy - YD
Air Force - 11, 69
DSA-IS

Users
WC, MO, CE

FED SUP CLASS
5340

MS PART NO.(a)	A WHEEL DIA. "NOM."	Ⓑ STYLE CASTER	Ⓑ TYPE WHEEL	TYPE TIRE	Ⓑ RATED LOAD LBS. (MIN)	CASTER WEIGHT MAX. LBS.	B (b) TREAD WIDTH AT BASE OF TIRE ± 1/16	C OVERALL HEIGHT ± 1/4	D (c) SWIVEL CLEARANCE MAX.	D (c) SWIVEL CLEARANCE MIN.	E DIA. OF BOLT HOLES ±.004	F BOLT HOLE SPACING ±.010	G BOLT HOLE SPACING ±.010	H TOP PLATE WIDTH MAX.	J TOP PLATE LENGTH MAX.	K TOP PLATE THICKNESS AT BOLT HOLE MAX.
MS27149-8SRC	8	RIGID	SINGLE	CURED ON	560	30	2-1/2	10-1/2	8-1/2	6-1/2	.656	4.875	6.750	7	8-1/2	3/4
MS27149-8SRV				DEMOUNTABLE												
MS27149-8SNC		NONOFFSET SWIVEL		CURED ON												
MS27149-8SNV				DEMOUNTABLE												
MS27149-8SWC		OFFSET SWIVEL		CURED ON												
MS27149-8SWV				DEMOUNTABLE												
MS27149-8DRC		RIGID	DUAL	CURED ON	795	45										
MS27149-8DRV				DEMOUNTABLE												
MS27149-8DNC		NONOFFSET SWIVEL		CURED ON												
MS27149-8DNV				DEMOUNTABLE												
MS27149-8DWC		OFFSET SWIVEL		CURED ON												
MS27149-8DWV				DEMOUNTABLE												
MS27149-10SRC	10	RIGID	SINGLE	CURED ON	830	35	3	12-3/4	9-3/4	7	.656	4.875	6.750	7	8-1/2	3/4
MS27149-10SRV				DEMOUNTABLE												
MS27149-10SNC		NONOFFSET SWIVEL		CURED ON												
MS27149-10SNV				DEMOUNTABLE												
MS27149-10SWC		OFFSET SWIVEL		CURED ON												
MS27149-10SWV				DEMOUNTABLE												
MS27149-10DRC		RIGID	DUAL	CURED ON	1120	50										
MS27149-10DRV				DEMOUNTABLE												
MS27149-10DNC		NONOFFSET SWIVEL		CURED ON												
MS27149-10DNV				DEMOUNTABLE												
MS27149-10DWC		OFFSET SWIVEL		CURED ON												
MS27149-10DWV				DEMOUNTABLE												

APPROVED 14 Sep 61 REVISED Ⓑ For change see sheets 1, 2, AND 3

P A Air Force - 11
Other Cust
Air Force - 11
Army-WC
Navy-YD

PROCUREMENT SPECIFICATION
MIL-C-4751

TITLE
CASTERS, RIGID AND SWIVEL,
PRECISION, HEAVY DUTY

SUPERSEDES
MS24376

MILITARY STANDARD
MS27149

SHEET 2

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering design applications and for repetitive use shall be made from this document

Reviewers
Army - GL
Navy - YD
Air Force - 11, 69
DSA-IS

Users
WC, MO, CE

MS PART NO. (a)	A WHEEL DIA. "NOM."	Ⓑ STYLE CASTER	Ⓑ TYPE WHEEL	TYPE TIRE	Ⓑ RATED LOAD LBS. (MIN)	CASTER WEIGHT MAX. LBS.	B THREAD WIDTH (b) AT BASE OF TIRE ± 1/16	C OVERALL HEIGHT ± 1/4	D (c) SWIVEL CLEARANCE		E DIA. OF BOLT HOLES ±.004	F BOLT HOLE SPACING ±.010	G BOLT HOLE SPACING ±.010	H TOP PLATE WIDTH MAX.	J TOP PLATE LENGTH MAX.	K TOP PLATE THICKNESS AT BOLT HOLE MAX.
									MAX.	MIN.						
MS27149-12SRC	12	RIGID	SINGLE	CURED ON	950	50	3	14-3/4	11-1/2	9	.656	4.875	6.750	7	8-1/2	3/4
MS27149-12SRV				DEMOUNTABLE												
MS27149-12SNC		NONOFFSET SWIVEL		CURED ON												
MS27149-12SNV				DEMOUNT\BLE												
MS27149-12SMC		OFFSET SWIVEL		CURED ON												
MS27149-12SMV				DEMOUNTABLE												
MS27149-12DRC		RIGID	DUAL	CURED ON	1280	70										
MS27149-12DRV				DEMOUNTABLE												
MS27149-12DNC		NONOFFSET SWIVEL		CURED ON												
MS27149-12DNV				DEMOUNTABLE												
MS27149-12DMC		OFFSET SWIVEL		CURED ON												
MS27149-12DMV				DEMOUNTABLE												
MS27149-16SRC	16	RIGID	SINGLE	CURED ON	1660	70	4	19-1/2	15	12	.656	7.000	9.750	9	11	3/4
MS27149-16SRV				DEMOUNTABLE												
MS27149-16SNC		NONOFFSET SWIVEL		CURED ON												
MS27149-16SNV				DEMOUNTABLE												
MS27149-16SMC		OFFSET SWIVEL		CURED ON												
MS27149-16SMV				DEMOUNTABLE												
MS27149-16DRC		RIGID	DUAL	CURED ON	2440	120										
MS27149-16DRV				DEMOUNTABLE												
MS27149-16DNC		NONOFFSET SWIVEL		CURED ON												
MS27149-16DNV				DEMOUNTABLE												
MS27149-16DMC		OFFSET SWIVEL		CURED ON												
MS27149-16DMV				DEMOUNTABLE												

Ⓑ NOTE - Deleted

FED SUP CLASS
5340

APPROVED 14 Sep 61 REVISED Ⓑ For changes see sheets 1, 2, AND 3

P A Air Force - 11
Other Cust
Air Force - 11
Army - WC
Navy - YD

TITLE
CASTERS, RIGID AND SWIVEL,
PRECISION, HEAVY DUTY

MILITARY STANDARD

MS 27149

PROCUREMENT SPECIFICATION
MIL-C-4751

SUPERSEDES
MS24375

SHEET 3

DD FORM 1 SEP 57 672-1