

FED. SUP CLASS
4220

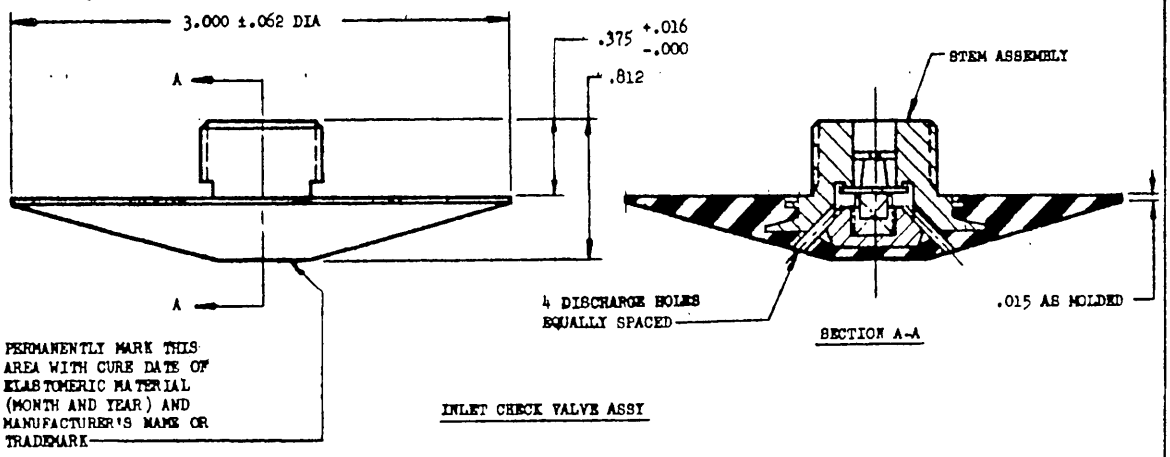

INLET CHECK VALVE ASSY

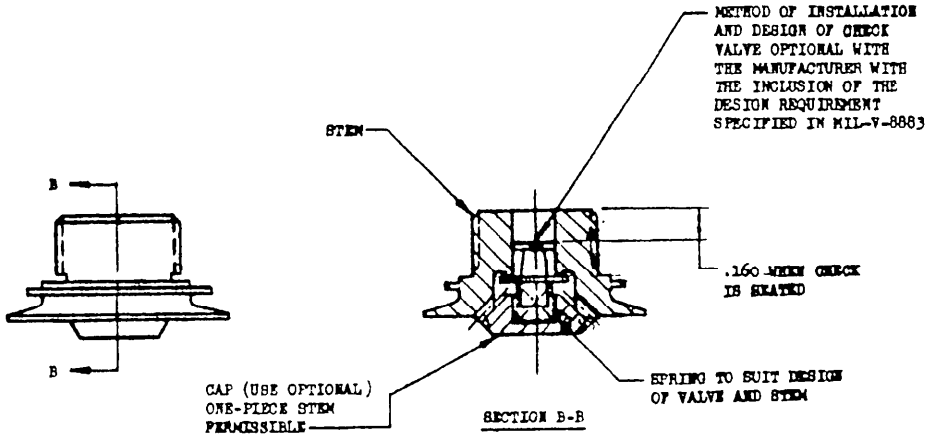

STEM ASSEMBLY

NOTES:

1. MATERIAL: SEE PROCUREMENT SPECIFICATION.
2. FINISH: UNLESS OTHERWISE SPECIFIED, MAXIMUM SURFACE ROUGHNESS SHALL BE 125.
3. WEIGHT: 2.5 OUNCES MAXIMUM
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005 ANGLES ±0° 30'.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - MP Other Cust Army - MD USAF-11	TITLE VALVE, CHECK, INLET, ONE-MAN LIFE RAFT, TYPE I	MILITARY STANDARD MS29599
PROCUREMENT SPECIFICATION MIL-V-8883	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 14938


APPROVED 10 Jun 65 REVISED

Review activities: Navy - MP
Army - MD
USAF - 11, 81


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
4220

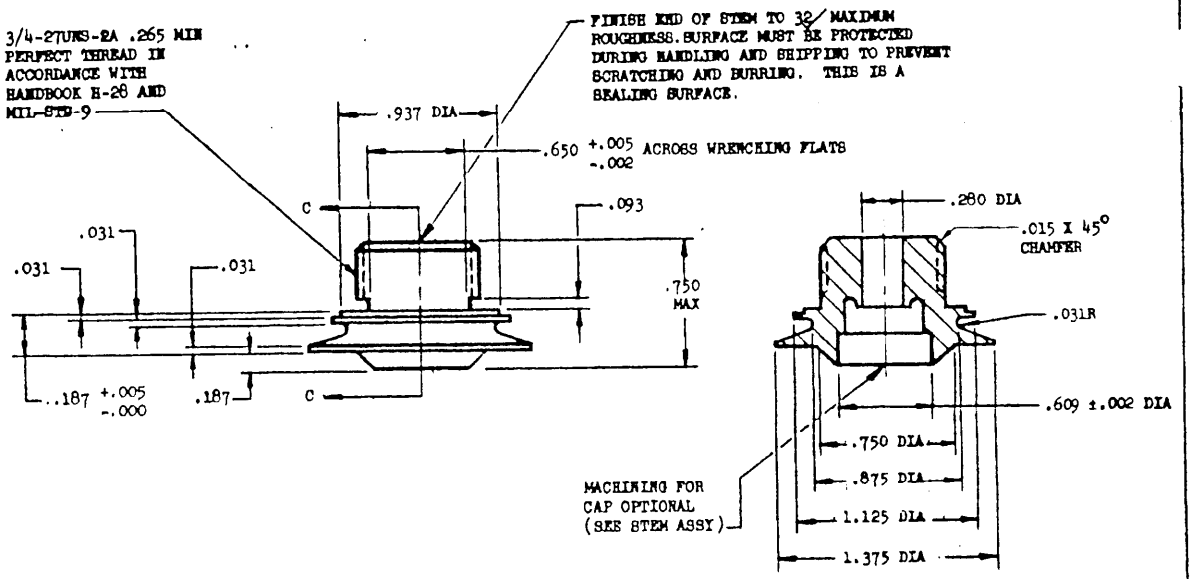

SECTION C-C

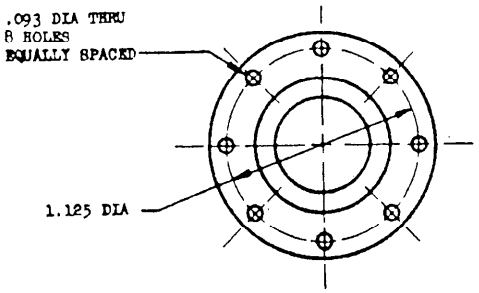

STEM

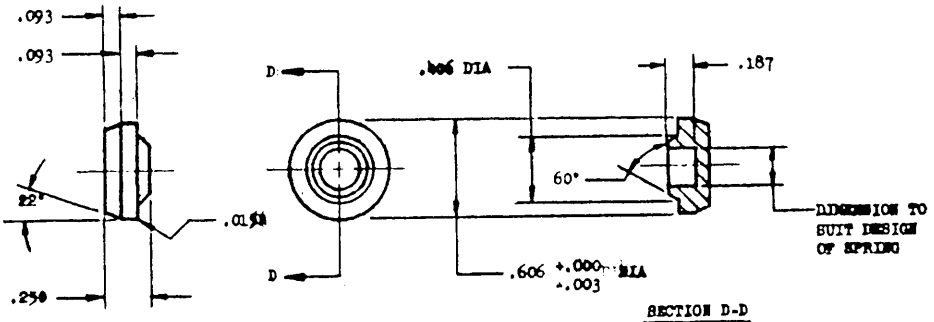

SECTION D-D

CAP (OPTIONAL)

Review activities:
Navy - WP
Army - MO
USAF - 11, 8i

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 10 Jun 65 REVISED

P.A. Navy - WP Other Cust Army - MO USAF-11	TITLE VALVE, CHECK, INLET, ONE-MAN LIFE RAFT, TYPE I	MILITARY STANDARD MS29599
PROCUREMENT SPECIFICATION MIL-V-8883	SUPERSEDES:	SHEET 2 OF

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 14038

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.