FED. SUP CLASS 3006

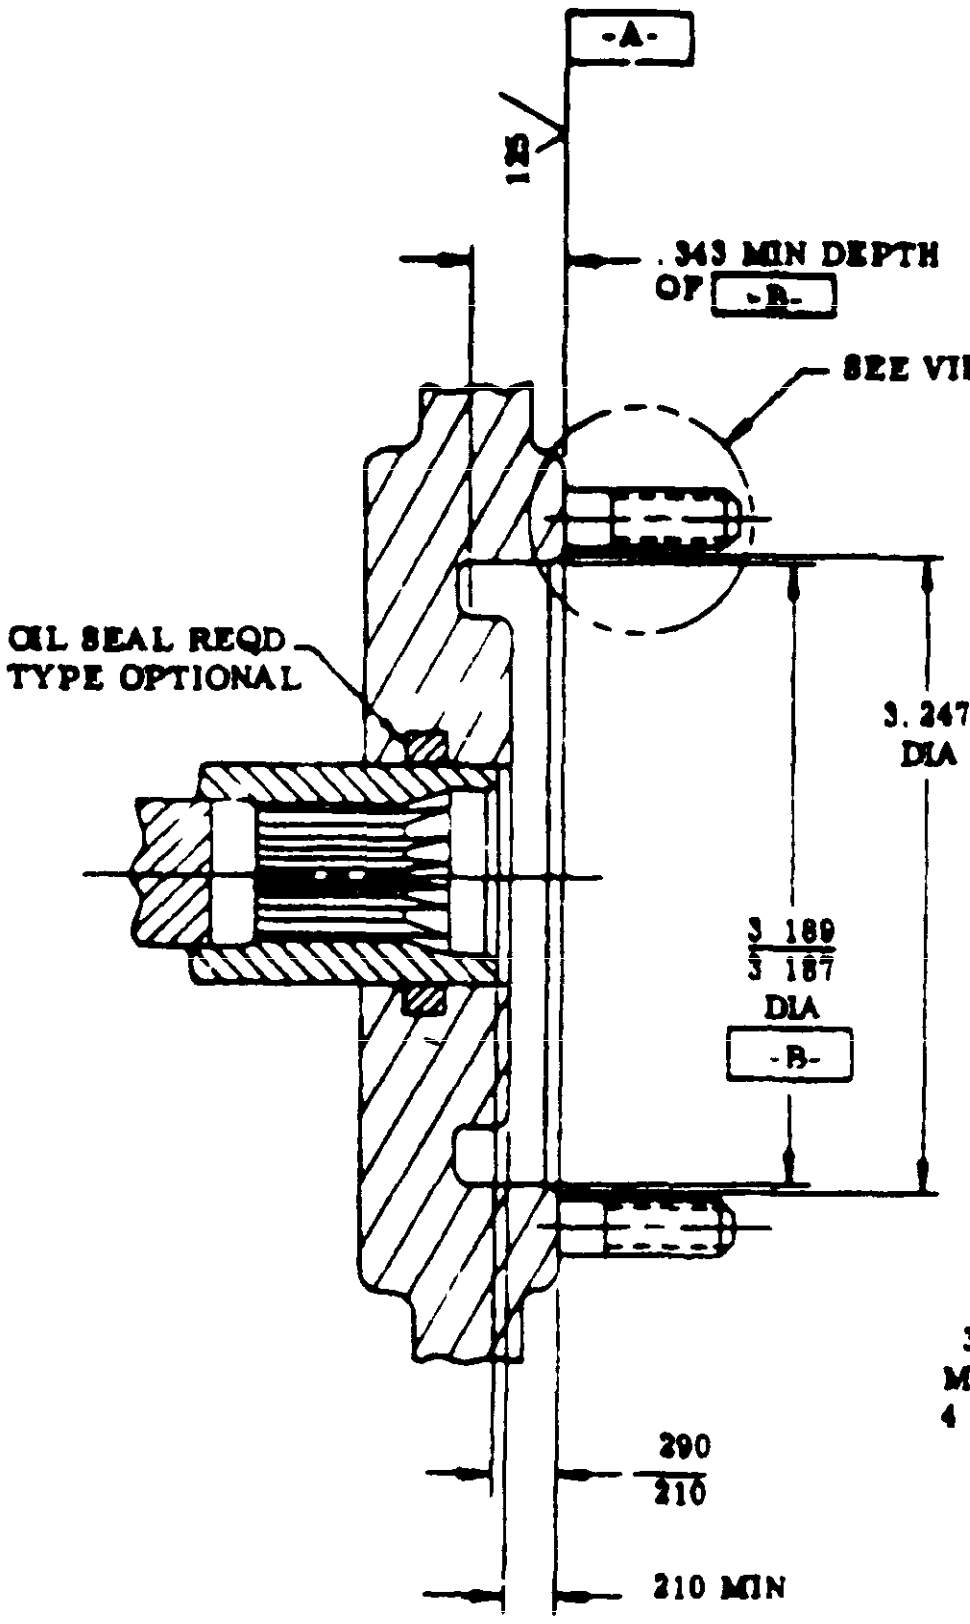
-A-
.125
.343 MIN DEPTH OF -B-
SEE VIEW C
OIL SEAL REQD TYPE OPTIONAL
3.247 DIA
3.189 / 3.187 DIA
-B-
.290 / .210
.210 MIN

SECTION B-B

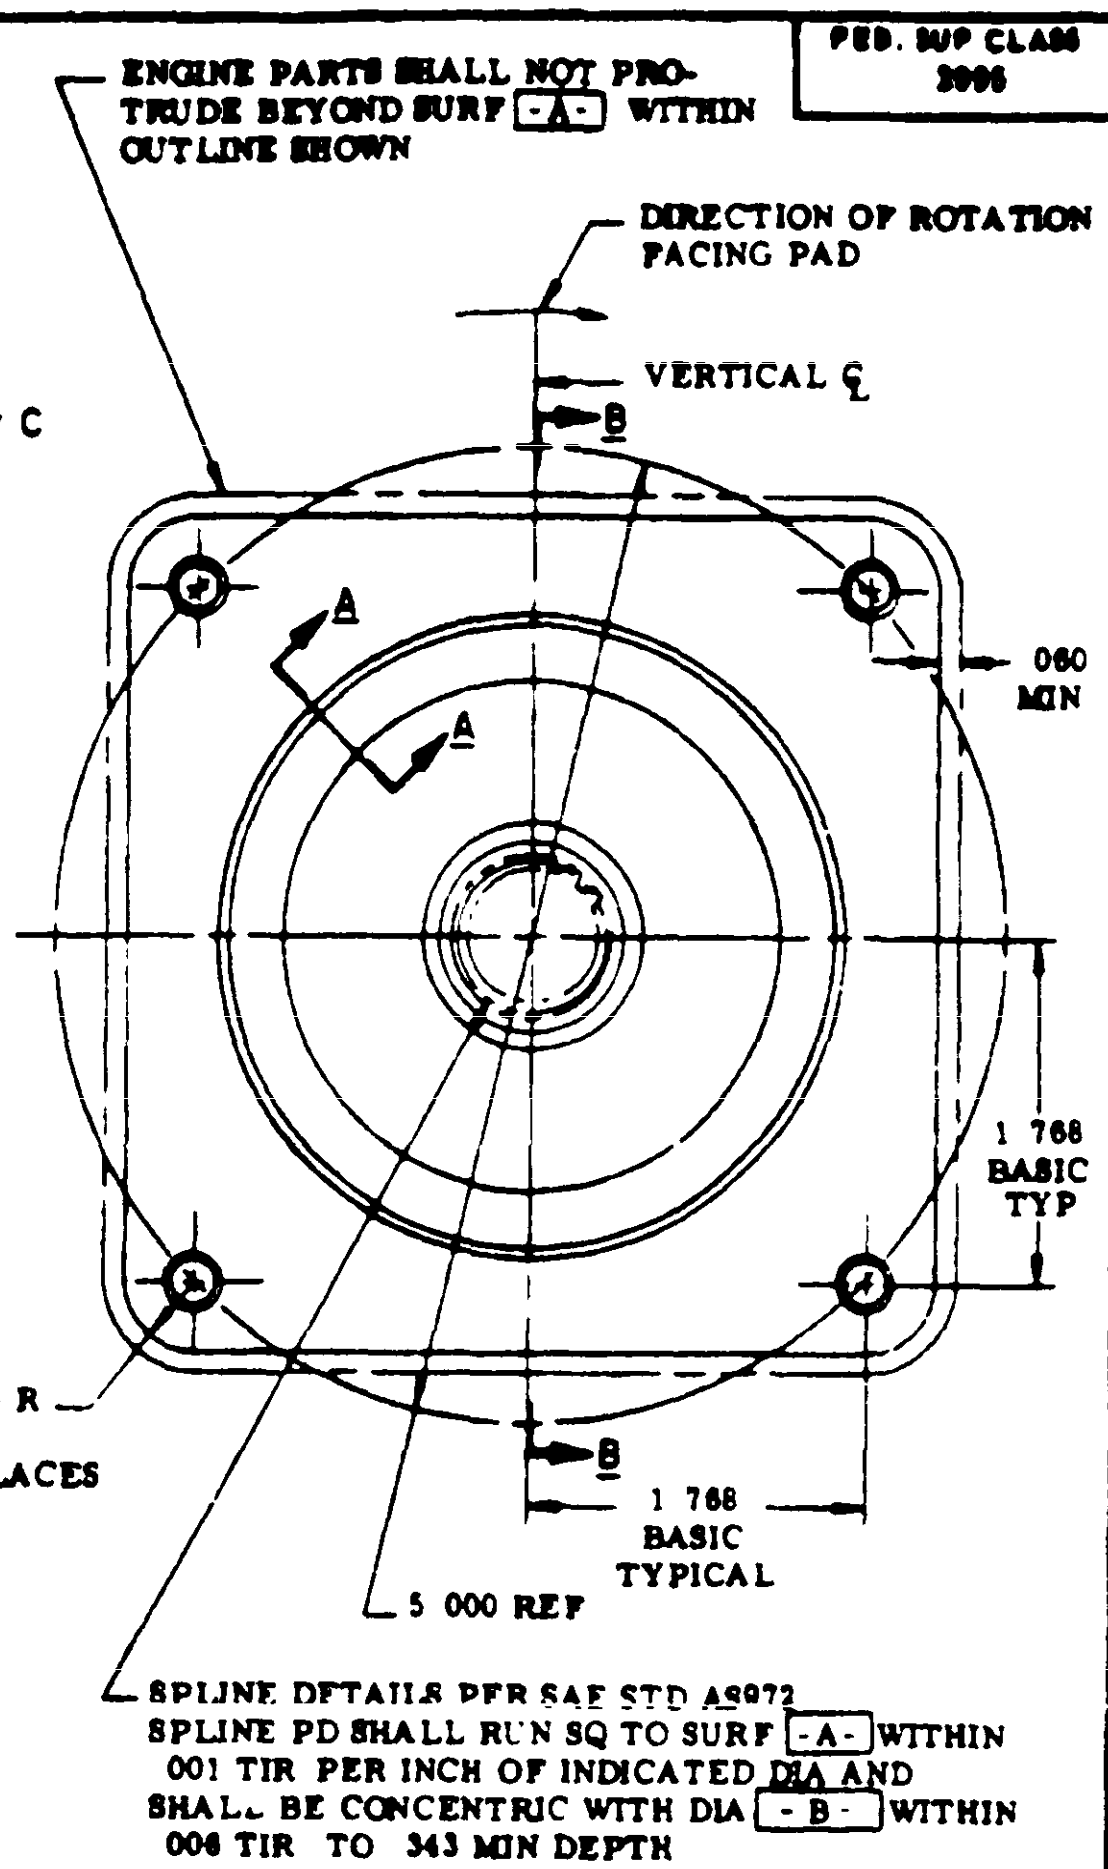
DIRECTION OF ROTATION FACING PAD
VERTICAL ℄
B
A
A
.060 MIN
1.768 BASIC TYP
.344 R MIN 4 PLACES
B
1.768 BASIC TYPICAL
5.000 REF

ENGINE PARTS SHALL NOT PROTRUDE BEYOND SURF -A- WITHIN OUTLINE SHOWN

SPLINE DETAILS PER SAE STD AS972
SPLINE PD SHALL RUN SQ TO SURF -A- WITHIN .001 TIR PER INCH OF INDICATED DIA AND SHALL BE CONCENTRIC WITH DIA -B- WITHIN .004 TIR TO .343 MIN DEPTH

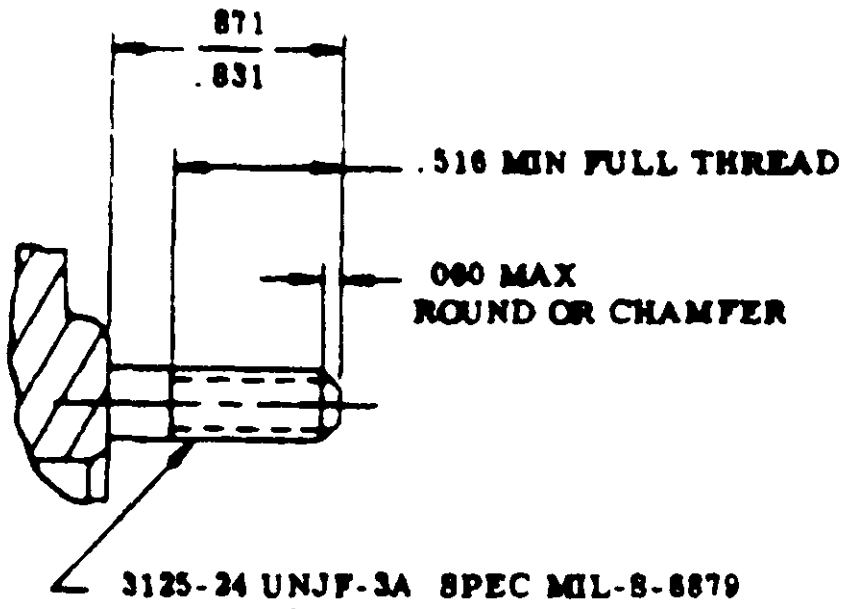
.871 / .831
.516 MIN FULL THREAD
.060 MAX ROUND OR CHAMFER

.3125-24 UNJF-3A SPEC MIL-S-8879
4 STUDS EQUALLY SPACED AND LOCATED WITHIN .007 R OF TRUE POSITION IN RELATION TO -B-

VIEW C (ENLARGED)


.030 / .015 R
32
30°
32
-B-
.264 MIN
.060 R MIN
.005 R MIN

SECTION A-A (ENLARGED)

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 12 JUNE 1968 REVISED

P.A. NAVY - AS Other Cust	TITLE DRIVE PAD - ACCESSORY, 5.000 BC SQUARE, DESIGN STANDARD FOR	MILITARY STANDARD MS3326(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

USER SYMBOLS: NAVY-AS

REVIEWER SYMBOLS: NAVY-AS

"Reviewer/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 17700

FED. SUP CLASS
2995

DASH NO.	RATED TORQUE, LB. IN	RATED POWER, HP	RATED SPEED, RPM	SPLINE SIZE PD	ACCESSORY	
					WEIGHT - LB, MAX	STATIC OVERHUNG MOMENT, LB -IN., MAX
-1	-	6	12,000 ± 5%	.600	20	60
-2		12	12,000 ± 5%	600	35	150
-3	600	-	8,000 ± 5%	800	25	100
-4	300	-	16,000 ± 5%	600	25	100
-5 S	750	-	3,300 ± 10%	600	20	60
-6 S	1500	-	3,300 ± 10%	600	35	150

NOTES

1 SPEED THE RATED SPEED OF ALL THE DRIVES EXCEPT THE STARTER DRIVES (TYPE S) SHALL BE PROVIDED WHEN THE POWER SOURCE IS OPERATING AT THE HIGHEST STABILIZED SPEED AT ANY OPERATING CONDITION
THE RATED SPEED OF THE TYPE S DRIVES SHALL BE THE SPEED ABOVE WHICH THE ENGINE WILL ACCELERATE TO IDLE SPEED AT STANDARD STATIC SEA LEVEL CONDITIONS WITHOUT ASSISTANCE FROM THE STARTER

2 STRENGTH ALL THE DRIVES EXCEPT THE STARTER DRIVES (TYPE 'S) SHALL BE CAPABLE OF DELIVERING RATED TORQUE OR POWER CONTINUOUSLY FROM IDLE TO MAXIMUM POWER SOURCE SPEED THEY SHALL ALSO WITHSTAND AN INSTANTANEOUS TORQUE EQUIVALENT TO FIVE TIMES THE RATED POWER OR TORQUE AT ANY ENGINE SPEED WITHOUT PERMANENT DEFORMATION OR FAILURE
THE TYPE S DRIVES SHALL BE CAPABLE OF WITHSTANDING THE RATED TORQUE CONTINUOUSLY FROM REST TO RATED SPEED THEY SHALL ALSO WITHSTAND AN INSTANTANEOUS TORQUE OF TWO TIMES THE RATED TORQUE WITHOUT PERMANENT DEFORMATION OR FAILURE

3 LUBRICATION POSITIVE ENGINE OIL LUBRICATION SHALL BE PROVIDED TO THE SPLINE

4 OIL LEAKAGE OIL LEAKAGE OUT OF THE DRIVE SHALL NOT EXCEED 3CC PER HOUR PROVISIONS FOR DRAINING OIL FROM THE DRIVE CAVITY SHALL BE SUPPLIED

5 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED
TOLERANCES DECIMALS ± 010 ANGLES ± 2°

6 FINISH BREAK ALL SHARP EDGES 003 - 015 UNLESS OTHERWISE SPECIFIED

7 SURFACE TEXTURE IN ACCORDANCE WITH USAS B46 1-1962

8 SAE AS STANDARDS ARE PUBLICATIONS OF THE SOCIETY OF AUTOMOTIVE ENGINEERS INC .
TWO PENNSYLVANIA PLAZA, NEW YORK, N Y 10001

USER SYMBOLS·
NAVY-AS

REVIEWER SYMBOLS
NAVY-AS

"Reviewer/user information is current as of the date of this document For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are requested to employ this standard where possible.

APPROVED 12 JUNE 1968 REVISED

P A NAVY - AS Other Cust	TITLE DRIVE PAD - ACCESSORY, 5.000 BC SQUARE, DESIGN STANDARD FOR	MILITARY STANDARD MS3326(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO 17706