INCH-POUND
MS35059L
5 December 2022
SUPERSEDING
MS35059K
15 December 2005


DETAIL SPECIFICATION SHEET

SWITCH, TOGGLE, TWO POLE, SEALED TOGGLE

INACTIVE FOR NEW DESIGN AFTER 25 FEBRUARY1987

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-83731.

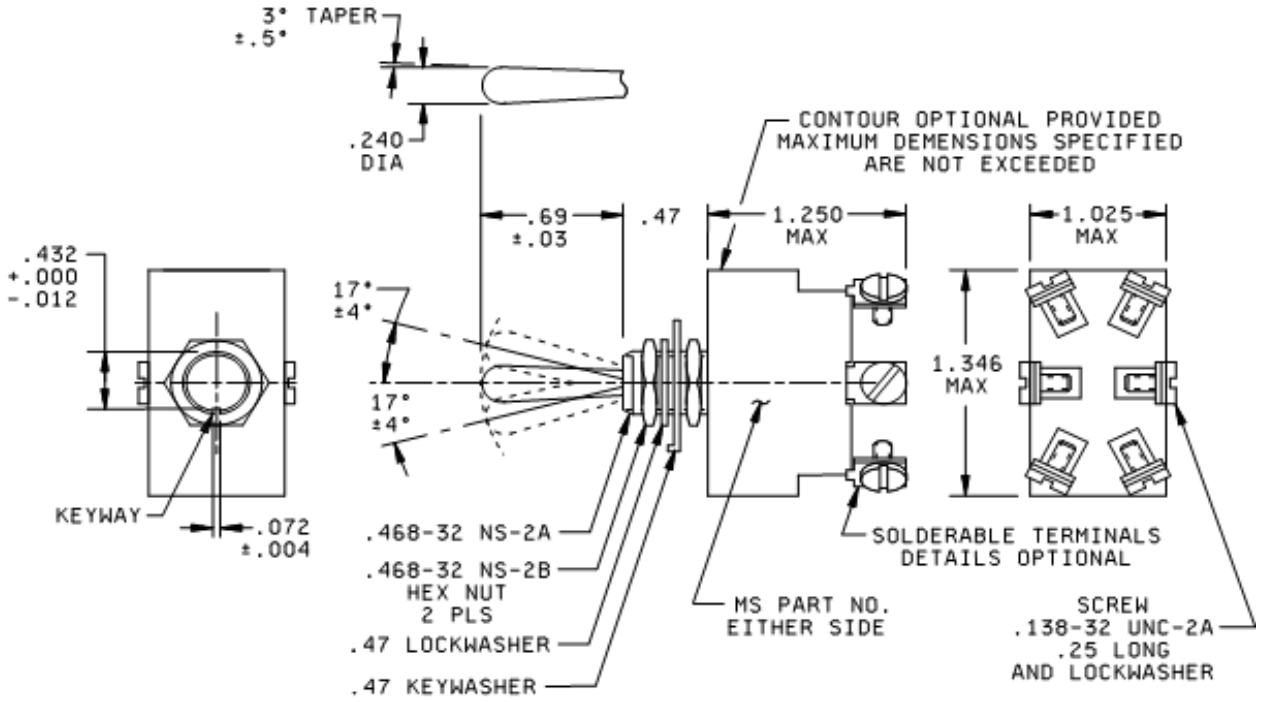


NOTES:
1. For hardware and terminals screw detail specifications see supplement of MIL-DTL-83731.
2. All dimensions are in inches.
3. Unless otherwise specified, Tolerance is ± .02 on two place decimals and ± .005 on three place decimals.
4. For design feature purposes, this specification sheet takes precedence over procurement document referenced herein.

FIGURE 1 Dimensions and configurations.


DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

All switches on this specification sheet are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.

Maximum weight is 0.10 lbs.

Electrical Endurance: 10,000 cycles.
Mechanical Endurance: 20,000 cycles.

MS part number: See table I.

Referenced documents shall be of the issue in effect on the date of invitation for bid.

Electrical Rating: See table II.

Table I. MS part numbers

| MS Part No | Former MS Part No. | | Former AN Part No. | Former Jan Type Designation |
|---|---|---|---|---|
| | Screw-Lug Terminal | Solder-Lug Terminal 1/ | | |
| MS35059-21 | MS35059-5 | - | AN3027-1 | ST50 P |
| | - | MS35059-16 | - | ST52 P |
| MS35059-22 | - | - | AN3027-2 | ST50 K |
| | - | MS35059-9 | - | ST52 K |
| MS35059-23 | MS35059-4 | - | AN3027-3 | ST50 N |
| | - | MS35059-15 | - | ST52N |
| MS35059-24 | MS35059-1 | - | AN3027-9 | - |
| | - | MS35059-12 | - | - |
| MS35059-25 | MS35059-3 | - | AN3027-10 | - |
| | - | MS35059-14 | - | - |
| MS35059-26 | MS35059-6 | - | AN3027-6 | ST50R |
| | - | MS35059-17 | - | ST52R |
| MS35059-27 | MS35059-7 | - | AN3027-7 | ST50S |
| | - | MS35059-18 | - | ST52S |
| MS35059-28 | MS35059-2 | - | AN3027-11 | - |
| | - | MS35059-13 | - | - |
| MS35059-29 | - | - | AN3027-4 | ST50L |
| | - | MS35059-10 | - | ST52L |
| MS35059-30 | - | - | AN3027-5 | ST50M |
| | - | MS35059-11 | - | ST52M |
| MS35059-31 | MS35059-8 | - | AN3027-8 | ST50T |
| | - | MS35059-19 | --- | ST52T |

1/ These MS part numbers are superseded by MS part number MS35059-21 thru MS35059-31 inclusive as applicable. By removing the screws and lockwashers from applicable part, a switch with solder lug terminals is formed.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.

TABLE II. Detail Requirements.

| MS Part No. | Circuit with toggle lever in | | | Current Capacity (amperes per pole) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Direct Current | | | | | | | Alternating Current 400 Hertz | | | Alternating current 60 Hertz | | | |
| | Keying side | Center | Opposite keying side | Lamp load circuit | Resistive circuit | | | Inductive circuit | | | Lamp Load circuit | Resistive circuit | Inductive circuit | Resistive circuit | | Inductive circuit | Lamp load circuit |
| | | | | 28 V | 28 V | 125 V | 250 V | 28 V | 125 V | 250 V | 115 V | 115 V | 115 V | 115 V | 220 V | 115 V | 115 V |
| MS35059-21 | On | Off | On | 7 | 20 | ---- | --- | 15 | ------ | ----- | 4 | 20 | 15 | 20 | ----- | ---- | ------- |
| MS35059-22 | Off | None | On | | | | | | | | | | | | | | |
| MS35059-23 | On | None | On | | | | | | | | | | | | | | |
| MS35059-24 | None | Off | On | | | | | | | | | | | | | | |
| MS35059-25 | None | Mom-Off | On | 5 | 18 | ------ | -- | 10 | ------ | ----- | 2 | 11 | 8 | 11 | ----- | ---- | ------- |
| MS35059-26 | Mom-On | None | On | | | | | | | | | | | | | | |
| MS35059-27 | Mom-On | Off | Mom-On | | | | | | | | | | | | | | |
| MS35059-28 | Mom-on | Off | None | | | | | | | | | | | | | | |
| MS35059-29 | Mom-Off | None | On | | | | | | | | | | | | | | |
| MS35059-30 | Mom-on | None | Off | | | | | | | | | | | | | | |
| MS35059-31 | Mom-on | Off | On | | | | | | | | | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.

Referenced documents
MIL-DTL-83731

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Project (5930-2023-007)

Review activities:
Army – AV, MI
Navy – EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.