FED. SUP CLASS
5305

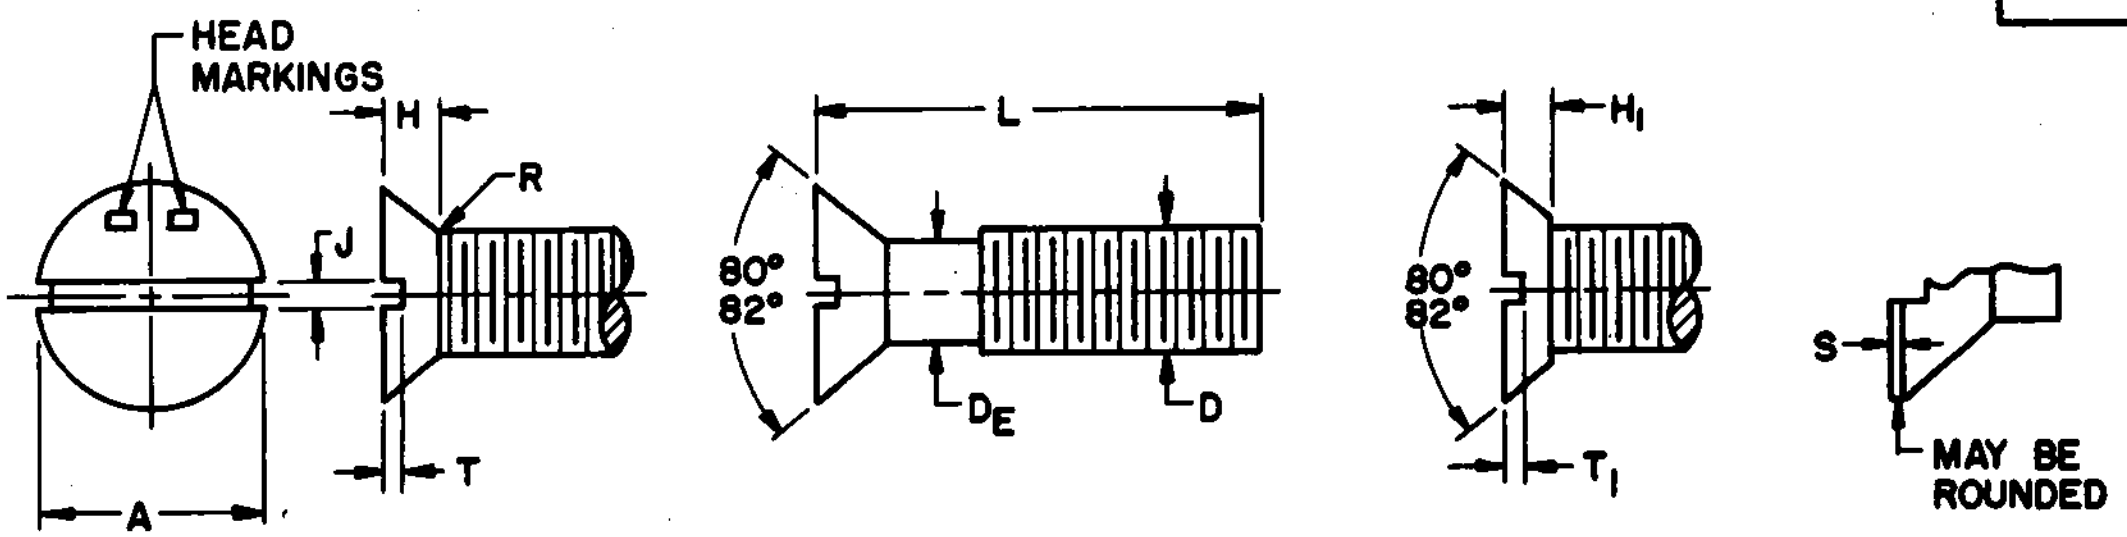

FULL HEAD

UNDERCUT HEAD

		#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
	NOMINAL SIZE D								
	THREADS PER INCH	80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
	BODY DIAMETER D_E Max	.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
	BODY DIAMETER D_E Min	.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
	HEAD DIAMETER A Max Sharp	.119	.146	.172	.225	.279	.332	.385	.507
	HEAD DIAMETER A Min Sharp	.105	.130	.156	.207	.257	.308	.359	.477
	HEAD DIAMETER A Abs Min	.101	.126	.150	.200	.249	.300	.348	.462
	SLOT WIDTH J Max	.023	.026	.031	.039	.048	.054	.060	.075
	SLOT WIDTH J Min	.016	.019	.023	.031	.039	.045	.050	.064
	FLAT S Max	.002	.003	.003	.004	.005	.006	.007	.009
	RADIUS R Max	.025	.027	.031	.041	.050	.055	.062	.071
FULL HEAD	HEAD HEIGHT H Max	.035	.043	.051	.067	.083	.100	.116	.153
	HEAD HEIGHT H Min	.026	.033	.040	.055	.069	.084	.098	.131
	SLOT DEPTH T Max	.015	.019	.023	.030	.038	.045	.053	.070
	SLOT DEPTH T Min	.010	.012	.015	.020	.024	.029	.034	.046
UNDERCUT HEAD	HEAD HEIGHT H_1 Max	.026	.032	.037	.048	.060	.071	.083	.108
	HEAD HEIGHT H_1 Min	.017	.022	.026	.036	.046	.055	.065	.086
	SLOT DEPTH T_1 Max	.012	.016	.019	.025	.032	.037	.044	.058
	SLOT DEPTH T_1 Min	.010	.012	.015	.020	.024	.029	.034	.046

	LENGTH L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No	Dash No	Dash No.	Dash No	Dash No.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8	+0 -1/32	1	6	13	22	33	48		
	3/16		2	7	14	23	34	49	67	
	1/4		3	8	15	24	35	50	68	85
	5/16		4	9	16	25	36	51	69	86
	3/8		5	10	17	26	37	52	70	87
	7/16			11	18	27	38	53	71	88
	1/2			12	19	28	39	54	72	89
	5/8				20	29	40	55	73	90
	3/4				21	30	41	56	74	91
	7/8					31	42	57	75	92
	1					32	43	58	76	93
	1-1/4	+0 -1/16					44	59	77	94
	1-1/2						45	60	78	95
	1-3/4						46	61	79	96
	2						47	62	80	97
Minimum complete thread length of 1-3/4.	2-1/4	+0 -3/32						63	81	98
	2-1/2							64	82	99
	2-3/4							65	83	100
	3							66	84	101

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Corrosion Resisting Steel, Specification QQ-S-763, 70,000 PSI minimum tensile strength, minimum elongation 16% in 2 inches.

FINISH: Passivated by immersion for a period of 20 minutes in a solution containing 15% (by weight) of nitric acid at a temperature of 70°F ±5°, followed by a thorough rinse in hot water.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

HEAD MARKING: For corrosion resisting steel screws. Only one visible dash necessary after slotting operation. Position optional. Screws size #4 and smaller require no head markings.

NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35250-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

REVISED Ⓐ 19 DEC 63

APPROVED FEB 9,1954

P.A. WC
Other Cust Ships MOAMA

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, NF-2A AND UNF-2A

MILITARY STANDARD

MS 35250

PROCUREMENT SPECIFICATION FF-S-92

SUPERSEDES:

SHEET 1 OF 2

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T17:12Z
Check the source to verify that this is the current version before use.

3

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
5305

				5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
	NOMINAL SIZE	D								
	THREADS PER INCH			24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
	BODY DIAMETER	D_E	Max	.3125	.3750	.4375	.5000	.5625	.6250	.7500
			Min	.2806	.3430	.3995	.4619	.5205	.5828	.7029
	HEAD DIAMETER	A	Max Sharp	.635	.762	.812	.875	1.000	1.125	1.375
			Min Sharp	.600	.722	.771	.831	.950	1.069	1.306
			Abs Min	.581	.700	.743	.802	.919	1.035	1.267
	SLOT WIDTH	J	Max	.084	.094	.094	.106	.118	.133	.149
			Min	.072	.081	.081	.091	.102	.116	.131
	FLAT	S	Max	.011	.013	.016	.018	.020	.023	.027
	RADIUS	R	Max	.083	.083	.100	.100	.110	.110	.125
FULL HEAD	HEAD HEIGHT	H	Max	.191	.230	.223	.223	.260	.298	.372
			Min	.165	.200	.190	.186	.220	.253	.319
	SLOT DEPTH	T	Max	.088	.106	.103	.103	.120	.137	.171
			Min	.058	.070	.066	.065	.077	.088	.111
UNDERCUT HEAD	HEAD HEIGHT	H_1	Max	.135	.162	.156	.160	.185	.212	.264
			Min	.109	.132	.126	.123	.145	.167	.211
	SLOT DEPTH	T_1	Max	.073	.088	.085	.085	.100	.114	.142
			Min	.058	.070	.066	.065	.077	.088	.111

	LENGTH L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8	+0 -1/32	Ⓐ CANCELLED SEE NOTE						
	3/16								
	1/4								
	5/16								
	3/8		102						
	7/16		103						
	1/2		104	117					
	5/8		105	118	130				
	3/4		106	119	131	142			
	7/8		107	120	132	143	153	163	
	1		108	121	133	144	154	164	173
	1-1/4	+0 -1/16	109	122	134	145	155	165	174
	1-1/2		110	123	135	146	156	166	175
	1-3/4		111	124	136	147	157	167	176
	2		112	125	137	148	158	168	177
Minimum complete thread length of 1-3/4.	2-1/4	+0 -3/32	113	126	138	149	159	169	178
	2-1/2		114	127	139	150	160	170	179
	2-3/4		115	128	140	151	161	171	180
	3		116	129	141	152	162	172	181

NOTE: For illustration, material, finish, and other pertinent data see sheet 1.

Ⓐ CANCELLED AFTER 19 Dec 1963 USE MS51960. INTERCHANGEABILITY RELATIONSHIP-MS51960 can replace the cancelled screws of the same size. The cancelled MS35250 cannot always replace MS51960 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2

APPROVED FEB 9, 1954

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC	TITLE SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, NF-2A & UNF-2A	MILITARY STANDARD MS 35250
Other Cust	Ships MOAMA		
PROCUREMENT SPECIFICATION FF-S-92		SUPERSEDES:	SHEET 2 OF

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2020-10-28T17:12Z
Check the source to verify that this is the current version before use.