
FED SUP CLASS
4730

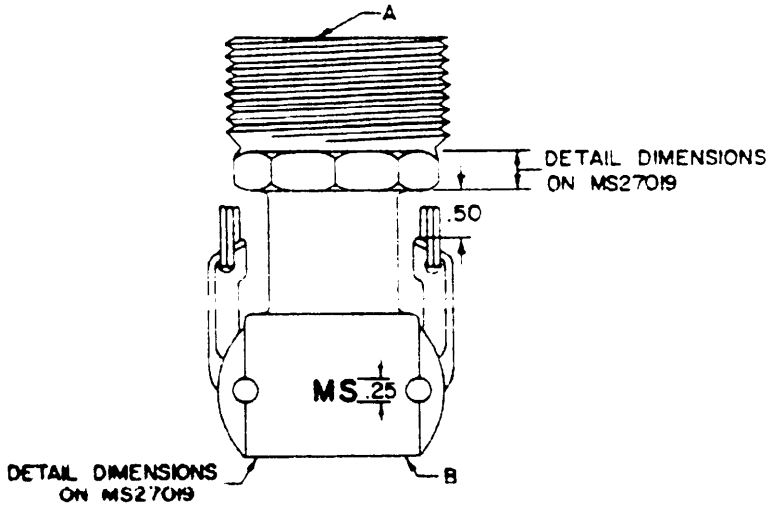

DASH NUMBER	CLASS NUMBER		NOMINAL END SIZE		GASKET REQ'D
	CLASS 1	CLASS 2	A	B	
-1	X		4	3	MS27030-8
-2		X			
-3	X		3	2	MS27030-6
-4		X			
-5	X		2	1	MS27030-4
-6		X			
-7	X		6	4	MS27030-9
-8		X			
-9	X		1-1/2	2	MS27030-6
-10		X			
-11	X		2	1-1/2	MS27030-5
-12		X			
-13	X		3	4	MS27030-9
-14		X			
-15	X		1	1-1/2	MS27030-5
-16		X			

(E) DENOTES CHANGES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

User activities :
Navy - SH

Review activities :
Army - GL
Air Force - 82
DLA - CS

APPROVED 15 OCT 1961 (A) 2 MAR 1970 (B) 6 DEC 1972 (L) 19 AUG 1975 (D) 16 JULY 1980 (E) 15 MAY 1989

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-ME Other Cust NAVY-YD AF-99	STANAG No. 1761 (Total 24)	REDUCER, EXTERNAL PIPE THREAD BY QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, TYPE XIII	MS 49002
PROCUREMENT SPECIFICATIONS MIL-C-27487	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 SEP 87 672

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T17:52Z
Check the source to verify that this is the current version before use.

4730 0004949

NOTES:

1. MATERIAL
   a. BODY
      CLASS 1 ALUMINUM - QQ-A-601, ALLOY 356, TEMPER T6 OR ALLOY 40E, TEMPER T5.
      CLASS 2 BRASS - QQ-C-390, ALLOY 836,844 OR 922; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   b. ARMS, CAM - QQ-C-390, BRONZE, ALLOY 865 OR 862; OR BRASS, QQ-B-626, COPPER ALLOY 377.
   c. PINS, CAM - QQ-S-763, CRES, CLASS 304 OR 316, CONDITION A, FORM ROUND OR ASTM A582, TYPE 303SE, CONDITION A, FORM ROUND.
   d. RINGS WIRE - SPRING STEEL
2. FINISH
   a. BODY
      CLASS 1 ALUMINUM - MIL-A-8625, ANODIC COATING, TYPE II, CLASS 1.
      CLASS 2 BRONZE OR BRASS - BODY AND CAM ARMS, PLAIN.
   b. RINGS - QQ-P-416, CADMIUM PLATE, TYPE II, CLASS 2.
3. THREADS - IN ACCORDANCE WITH FED-STD-H28, SECTION V11 OR VIII AS APPLICABLE.
4. BURRS AND ALL FOREIGN MATTER SHALL BE REMOVED.
5. HYDROSTATIC TEST PRESSURE - 1 THROUGH 4 INCH, 300 P.S.I.; 6 INCH, 150 P.S.I., FOR DASH 7 AND 8.
6. WORKING PRESSURE - 1 THROUGH 4 INCH, 150 P.S.I.; 6 INCH, 75 P.S.I., FOR DASH 7 AND 8.
(E) 7. DIMENSIONS - IN INCHES. NOMINAL UNLESS OTHERWISE SPECIFIED. TOLERANCES ±.02.
8. PART NUMBER - THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS49002-1.
(E) 9. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
10. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.
(E) 11. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

NOTE: CERTAIN PROVISIONS (DIMENSIONS) OF THIS DOCUMENT ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (STANAG NO. 2761 AND QSTAG 240). WHEN CHANGE NOTICE, REVISION, OR CANCELLATION OF THIS DOCUMENT IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY SHALL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

PROVED 15 DECEMBER 1961 REVISED (L) FOR CHANGES SEE SHEETS 1 AND 2

(E) DENOTES CHANGES

P.A. ARMY-ME Other Cust NAVY - YD AF - 99	INTERNATIONAL INTEREST STANAG NO. 2761 QSTAG 240	TITLE REDUCER, EXTERNAL PIPE THREAD BY QUICK DISCONNECT, CAM-LOCKING TYPE, FEMALE, TYPE XIII	MILITARY STANDARD MS 49002
Procurement Specifications MIL-C-27487	SUPERSEDES		SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:52Z
Check the source to verify that this is the current version before use.