INCH-POUND

MS51500F
w/AMENDMENT 1
16 July 2018
SUPERSEDING
MS51500F
20 January 2017


DETAIL SPECIFICATION SHEET

FITTINGS, HYDRAULIC TUBE, FLARED 37 DEGREE AND FLARELESS, ADAPTER, STRAIGHT, PIPE TO TUBE, MALE END, 37 DEGREE FLARED

Reactivated after 20 January 2017 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

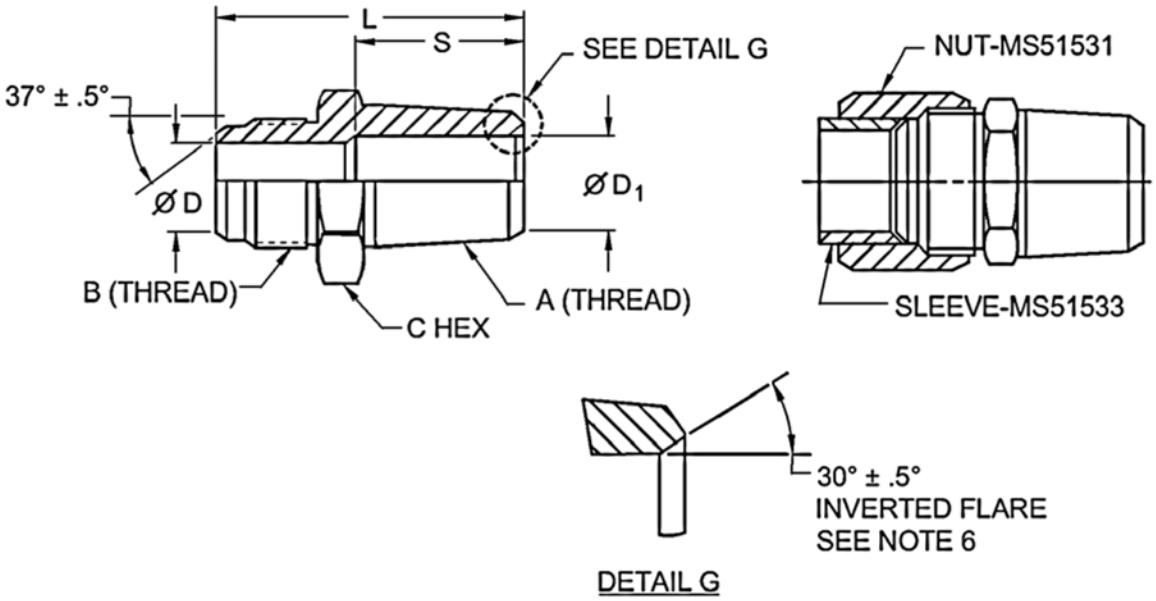

See notes at end of figure.

FIGURE 1. Male connector.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube O.D. Nom	A Pipe Thread NPTF	B Straight thread	C Hex flat nom
assembly (see note 4)	Body				
A2	B2	.1250 (3.175)	.125 -27	.3125-24 UNF-2A	7/16
A3	B3	.1875 (4.763)	.125 -27	.3750-24 UNF-2A	7/16
A4	B4	.2500 (6.350)	.125 -27	.4375-20 UNF-2A	1/2
A4-4	B4-4	.2500 (6.350)	.250 - 18	.4375-20 UNF-2A	9/16
A5	B5	.3125 (7.938)	.125 -27	.5000-20 UNF-2A	9/16
A5-4	AB5-4	.3125 (7.938)	.250 - 18	.5000-20 UNF-2A	9/16
A6-2	B6-2	.3750 (9.525)	.125 -27	.5625-18 UNF-2A	5/8
A6	B6	.3750 (9.525)	.250 - 18	.5625-18 UNF-2A	5/8
A6-6	B6-6	.3750 (9.525)	.375 - 18	.5625-18 UNF-2A	3/4
A6-8	B6-8	.3750 (9.525)	.500 - 14	.5625-18 UNF-2A	7/8
A8-4	B8-4	.5000 (12.700)	.250 - 18	.7500-16 UNF-2A	13/16
A8	B8	.5000 (12.700)	.375 - 18	.7500-16 UNF-2A	13/16
A8-8	B8-8	.5000 (12.700)	.500 - 14	.7500-16 UNF-2A	7/8
A8-12	B8-12	.5000 (12.700)	.750 - 14	.7500-16 UNF-2A	1 1/8
A10-6	B10-6	.6250 (15.875)	.375 - 18	.8750-14 UNF-2A	15/16
A10	B10	.6250 (15.875)	.500 - 14	.8750-14 UNF-2A	15/16
A12-8	B12-8	.7500 (19.050)	.500 - 14	1.0625-12 UN-2A	1 1/8
A12	B12	.7500 (19.050)	.750 - 14	1.0625-12 UN-2A	1 1/8
A14	B14	.8750 (22.225)	.750 - 14	1.1875-12 UN-2A	1 1/4
A16-12	B16-12	1.0000 (25.400)	.750 - 14	1.3125-12 UN-2A	1 3/8
A16	B16	1.0000 (25.400)	1.000 - 11 1/2	1.3125-12 UN-2A	1 3/8
A20	B20	1.2500 (31.750)	1.250 - 11 1/2	1.6250-12 UN-2A	1 11/16
A24	B24	1.5000 (38.100)	1.500 - 11 1/2	1.8750-12 UN-2A	2
A32	B32	2.0000 (50.800)	2.000 - 11 1/2	2.500-12 UN-2A	2 5/8

See notes at end of figure.

FIGURE 1. Male connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Suffix designator		D dia.		D_1 dia. inches (mm)	L inches (mm) ±.020	S max inches (mm)
Assembly (see note 4)	Body	Basic inches (mm)	Tolerance inches (mm)			
A2	B2	.062 (1.57)	±.003 (0.08)	.188 (4.78)	1.110 (28.19)	.490 (12.45)
A3	B3	.125 (3.18)	±.003 (0.08)	.188 (4.78)	1.140 (28.96)	.490 (12.45)
A4	B4	.172 (4.37)	±.003 (0.08)	.188 (4.78)	1.220 (30.99)	.490 (12.45)
A4-4	B4-4	.172 (4.37)	±.003 (0.08)	.281 (7.14)	1.420 (36.07)	.690 (17.53)
A5	B5	.234 (5.94)	±.003 (0.08)	.188 (4.78)	1.220 (30.99)	.640 (16.26)
A5-4	B5-4	.234 (5.94)	±.003 (0.08)	.281 (7.14)	1.420 (36.07)	.690 (17.53)
A6-2	B6-2	.297 (7.54)	±.004 (0.10)	.188 (4.78)	1.240 (31.50)	.480 (12.19)
A6	B6	.297 (7.54)	±.004 (0.10)	.281 (7.14)	1.430 (36.32)	.670 (17.02)
A6-6	B6-6	.297 (7.54)	±.004 (0.10)	.406 (10.31)	1.430 (36.32)	.580 (14.73)
A6-8	B6-8	.297 (7.54)	±.004 (0.10)	.531 (13.49)	1.690 (42.93)	.710 (18.03)
A8-4	B8-4	.391 (9.93)	±.004 (0.10)	.281 (7.14)	1.530 (38.86)	.680 (17.27)
A8	B8	.391 (9.93)	±.004 (0.10)	.406 (10.31)	1.530 (38.86)	.680 (17.27)
A8-8	B8-8	.391 (9.93)	±.004 (0.10)	.531 (13.49)	1.790 (45.47)	.810 (20.57)
A8-12	B8-12	.391 (9.93)	±.004 (0.10)	.719 (18.26)	1.850 (46.99)	.730 (18.54)
A10-6	B10-6	.484 (12.29)	±.004 (0.10)	.406 (10.31)	1.700 (43.18)	.720 (18.29)
A10	B10	.484 (12.29)	±.004 (0.10)	.531 (13.49)	1.890 (48.01)	.910 (23.11)
A12-8	B12-8	.609 (15.47)	±.005 (0.13)	.531 (13.49)	2.060 (52.32)	.940 (23.88)
A12	B12	.609 (15.47)	±.005 (0.13)	.719 (18.26)	2.060 (52.32)	.940 (23.88)
A14	B14	.718 (18.24)	±.005 (0.13)	.719 (18.26)	2.090 (53.09)	---
A16-12	B16-12	.844 (21.44)	+.007 (0.18) -.005 (0.13)	.719 (18.26)	2.110 (53.59)	.940 (23.88)
A16	B16	.844 (21.44)	+.007 (0.18) -.005 (0.13)	.938 (23.83)	2.300 (58.42)	1.130 (28.70)
A20	B20	1.078 (27.38)	+.008 (0.20) -.005 (0.13)	1.250 (31.75)	2.450 (62.23)	1.200 (30.48)
A24	B24	1.312 (33.32)	+.010 (0.25) -.005 (0.13)	1.500 (38.10)	2.680 (68.07)	1.270 (32.26)
A32	B32	1.781 (45.24)	.010 (0.25) -.005 (0.13)	1.938 (49.23)	3.110 (78.99)	1.370 (34.80)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Assemblies are only furnished to this specification (body, nut, and sleeve). Bodies are not to be stocked stored or issued.
5. At manufacturers option, through passages may conform with the smaller diameter specified or the appropriate end may be counter-bored to the larger diameter for depth “S”.
6. When specified in the Part or Identifying Number (PIN), provide a 30 degree inverted flare seating surface on the inside edge of the “A” pipe thread end.
7. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37 degree flared fittings.

FIGURE 1. Male connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Fittings shall be specified on figure 1 and in table I.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866.

Finish. Finishes shall be in accordance with table I. All platings shall be capable of meeting 96-hour salt spray test in accordance with ASTM B117. The fittings shall show no evidence of red corrosion after 96 hours of salt spray. Fluid passages, other openings, and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE I. Material and finish identification codes.


PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC. 2/
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/ 3/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 4/
R	Steel	Zinc plating in accordance with ASTM B633; type III or V, Fe/Zn 8. 4/ 5/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7, free machining alloy UNS S30300 method 1, type 2 or 4.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 6/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 6/
Z	Steel	Zinc plating in accordance with ASTM B695, type II, class 8. 4/ 5/
ZC	Steel	Zinc may be any zinc plating from PIN codes J, R, and Z with a colored chromate coating. 4/ 5/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems. Cadmium is prohibited from use in NAVSEA owned shipboard systems.
2/ Hexavalent chromium free. Finish shall be RoHS compliant.
3/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.
4/ Not for use in aircraft. Requires approval from the Program Office for all applications. Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook, "water glycol fluids are highly alkaline due to the presence of amine based corrosion inhibitors. As a result, these fluids can attack zinc, cadmium, magnesium, and non-anodized aluminum, forming sticky or gummy residues. Consequently, these metals should be avoided when selecting system components.
5/ These finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended.
6/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to SAE-AMS-STD-595 colors 36076 through 36293. Titanium shall not be used in oxygen or potable water systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for adapter size, a letter for material finish designator, and “blank” or the number 1 for an inverted flare.

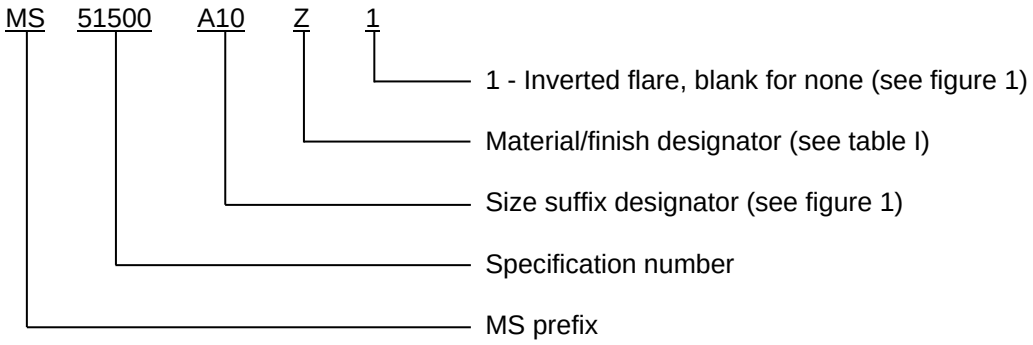

PIN example: MS51500A10Z1 indicates an adapter, straight, .6250 inch (15.875 mm) tube to 1/2 -14 NPTF, steel with zinc plating, inverted flare.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Cadmium is prohibited from use in NAVSEA owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2.

Class I and II ozone depleting substances (ODS) shall not be used in MS51821 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

SAE-AMS-STD-595/36076	SAE-AMS-STD-595/36251	ASTM F1136/F1136M
SAE-AMS-STD-595/36081	SAE-AMS-STD-595/36270	SAE-AMS-C-81562
SAE-AMS-STD-595/36099	SAE-AMS-STD-595/36280	SAE-AMS-QQ-P-416
SAE-AMS-STD-595/36118	SAE-AMS-STD-595/36293	SAE-AMS2417
SAE-AMS-STD-595/36134	MIL-DTL-16232	SAE-AMS2486
SAE-AMS-STD-595/36152	MS51531	SAE-AMS2488
SAE-AMS-STD-595/36170	MS51533	SAE-AMS2700
SAE-AMS-STD-595/36173	ASTM B117	SAE-J514
SAE-AMS-STD-595/36176	ASTM B633	T9070-AL-DPC-020/077-2
SAE-AMS-STD-595/36231	ASTM B695	

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2018-067)

Review activities:
Army - AR, AV, MI
Navy - AS, CG, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.