
USER ACTIVITIES: ARMY-AV NAVY-MC
REVIEWER ACTIVITIES: USAF-82,99
AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
1670

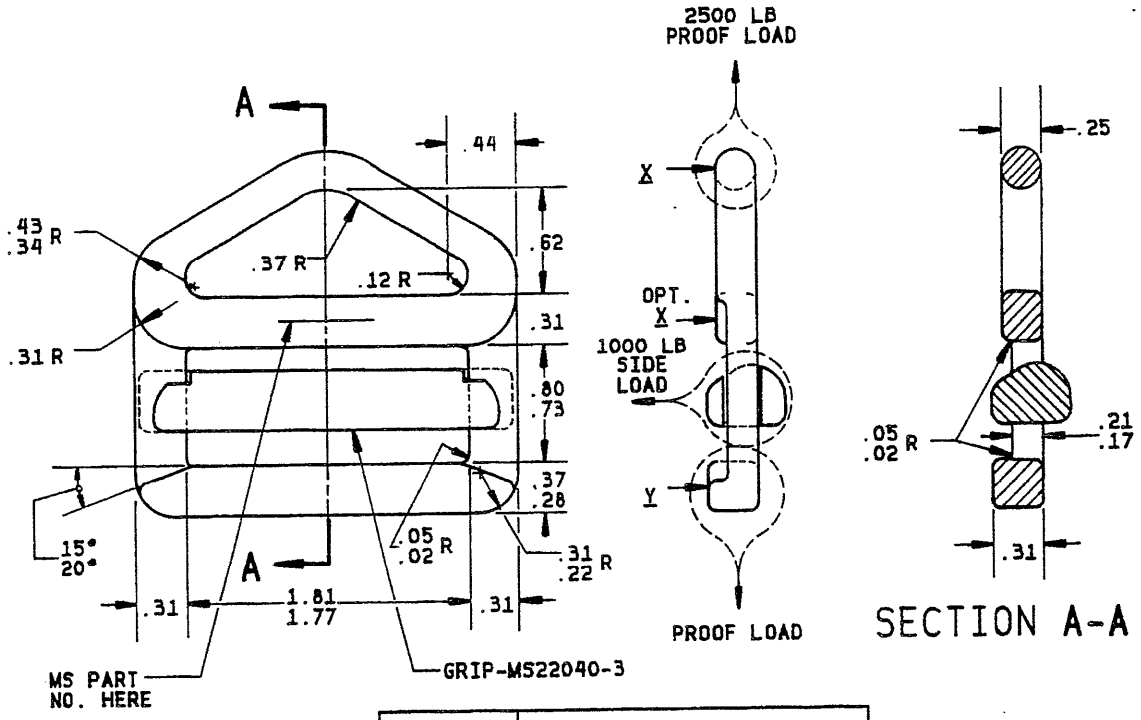

DASH NO.	DESCRIPTION
-1	ASSEMBLY, CADMIUM PLATED
-2	ASSEMBLY, ZINC COATED

NOTES:

MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED, SURFACE ROUGHNESS SHALL BE 125 MAX. IN ACCORDANCE WITH ANSI B46.1.

HEAT TREATMENT: AFTER ASSEMBLY, 170,000 TO 190,000 LBS/SQ. IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.

FINISH: -1 CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE I.*
-2 COATING, IMMERSION ZINC FLAKE/CHROMATE DISPERSION PER MIL-C-87115, CLASS 3.
*THE COATING FOR THE -2 FINISH MAY BE USED AS AN ALTERNATE FOR THE -1 FINISH.

V-RING SHALL BE SUBJECTED TO A 2500 POUND PROOF LOAD AND 1000 POUND SIDE LOAD AS INDICATED BY ARROWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION. V-RING TO BE SUPPORTED AT POINTS X OR OPTIONAL X, AND Y FOR SIDE LOAD TEST.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES ± .03.

ALL PERPENDICULAR SURFACES SHALL INTERSECT WITH A .04-.11 RADIUS UNLESS OTHERWISE SPECIFIED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.
EXAMPLE: MS 70113-1

(B) REDRAWN; REVISED: FINISH REQUIREMENTS, ADDED: OPTIONAL SIDE LOAD SUPPORT POINT, PART NUMBER NOTE, AND SHEET 2.

APPROVED 30 APRIL 1986 REVISED (B)

P.A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE RING, "V"- QUICK FIT, PARACHUTE HARNESS	MILITARY STANDARD MS 70113
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AF DWG 48B7055		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 1670-0554

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

END ITEM EXAMINATION
DIMENSION - FUNCTION TEST

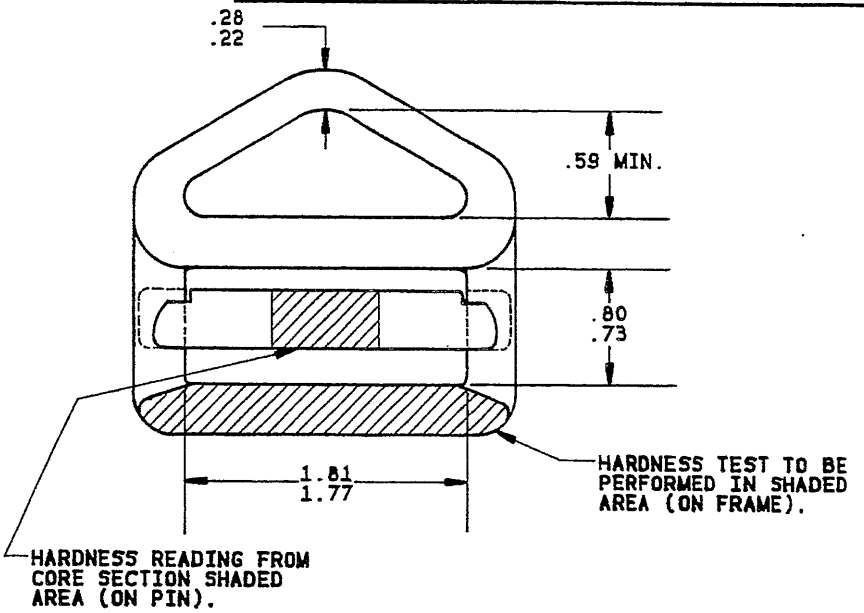

NOTES:

CRITICAL DIMENSIONS: IN DIRECTION SHOWN ONLY.

CRITICAL FUNCTIONAL TEST: GRIP BAR SHALL MOVE FREELY.

Ⓑ THIS SHEET ADDED.

APPROVED REVISED Ⓑ 30 APRIL 1986

P. A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE RING, "V"- QUICK FIT, PARACHUTE HARNESS	MILITARY STANDARD MS 70113
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AF DWG 48B7055		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES: ARMY-AV NAVY-MC

REVIEWER ACTIVITIES: USAF-82,99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.