
User activities: Army WC,SL,MU
Navy AS,SH,MC,OS
Air Force 19

Reviewer activities: Army MI,SL
Navy
Air Force 11,17,80
DSA-ES

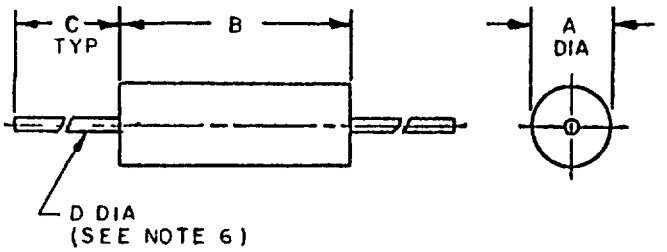

RATINGS	
Style	LT4
Grade	1
Class	B
Temperature rise	35°C
Ambient temperature	90°C
Operating temperature	-55° to +125°C
Dielectric withstanding Voltage (sea level)	1000 volts rms for a minimum of 60 sec
Dielectric withstanding Voltage (reduced barometric pressure)	200 volts rms for a minimum of 60 sec
Terminal pull	5 pounds
Altitude	70,000 feet
Weight	3.9 grams max

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.250 (6.35)	.313 (7.95)
B	.875 (22.23)	1.000 (25.40)
C	1.250 (31.75)	1.625 (41.28)
D	.026 (.66)	.030 (.76)

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No 1/	Type designation	Former type designation	Former MS part No	±10% Inductance	Q, min	Test frequency	Self-resonant frequency, Min	DC resistance Max	Rated DC current
2/				μH		MHz	MHz	Ohms	Ma
-14	LT4K002	LT8K001	MS91189-1	1.2	60	7.9	170	0.075	2,400
-15	LT4K003	---	---	1.5	60	7.9	160	0.090	2,150
-16	LT4K004	---	---	1.8	60	7.9	140	0.135	1,750
-17	LT4K005	LT8K002	MS91189-2	2.2	60	7.9	125	0.160	1,600
-18	LT4K006	---	---	2.7	60	7.9	115	0.220	1,350
-19	LT4K007	LT8K003	MS91189-3	3.3	60	7.9	100	0.305	1,150
-20	LT4K008	---	--	3.9	60	7.9	95	0.450	955
-21	LT4K009	LT8K004	MS91189-4	4.7	60	7.9	90	0.560	860
-22	LT4K010	---	---	5.6	60	7.9	80	0.745	745
-23	LT4K011	LT8K005	MS91189-5	6.8	60	7.9	75	1.05	635
-24	LT4K012	---	---	8.2	60	7.9	68	1.40	550
-25	LT4K013	LT8K006	MS91189-6	10.0	60	7.9	60	1.90	460
-26	LT4K014	---	---	12.0	40	2.5	53	2.65	395
-27	LT4K015	LT8K007	MS91189-7	15.0	40	2.5	50	3.25	355
-28	LT4K016	---	---	18.0	40	2.5	45	4.15	315

1/ The dash number added to the MS military-standard number constitutes the MS part number, for example, MS91189-14

(D) 2/ See note 11.

(D) denotes changes

APPROVED 15 DEC 53 REVISED (A) 18 OCT 62 (B) 25 MAR 63 (C) 14 MAR 72 (D) 31 OCT 72

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PA ARMY-EL Other Cust AF-80 NAVY-EC	International Interest	TITLE Coils, Radiofrequency, Molded, Fixed, Subminiature (Phenolic core) Types LT4K002 to LT4K016 incl.	MILITARY STANDARD MS 91189
Procurement Specification MIL-C-15305		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5950-0446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:41Z
Check the source to verify that this is the current version before use.

Electrical Characteristics (Final)				
Inspection Group	Allowable variation from initial measurement		Allowable % from specified minimum value in Electrical Characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification Inspection				
Group II	±2	--	--	- 10
Group III	±5	±(3%+.001ohm)	- 8	- 10
Group IV	±5	±(2%+.001ohm)	- 10	- 15
Quality Conformance Inspection				
Group C Subgroup I	±2	--	--	- 10
Subgroup II	±5	±(2%+.001ohm)	- 10	- 15
Subgroup III	±5	±(3%+.001ohm)	- 8	- 10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. These coils are intended to be mounted by the body.
4. The polarizing voltage during the moisture-resistance tests is applied with the positive lead connected to the coil terminals tied together, and the negative lead connected to the metal strap.
5. Terminal strength (Pull) test, is not applicable in "Group B" inspection Table VI.
6. Solderable/weldable lead wire, #21 AWG
7. Barometric pressure test (test condition C) is applicable.
8. Shock, specified pulse, method 213, test condition I, is applicable.
9. Referenced document shall be the issue in effect on date of invitation for bid.
10. This standard takes precedence over the procurement specification referenced herein.

Ⓓ 11. Former MS part numbers MS91189-29 thru MS91189-38 have been superseded by MS75103-1 thru MS75103-10, respectively.

APPROVED 15 DEC 53 REVISED Ⓓ FOR CHANGES SEE PAGES 1 AND 2

User activities: Army WC, SL, MU
Navy AS, SH, MC, OS
Air Force 19

Reviewer activities: Army MI, SL
Navy
Air Force 11, 17, 80
DSA - ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A ARMY-EL Other Cust AF-80 NAVY-EC	International Interest	TITLE Coils, Radiofrequency, Molded, Fixed, Subminiature (Phenolic core) Types LT4K002 to LT4K016 incl.	MILITARY STANDARD MS 91189
Procurement Specification MIL-C-15305		SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:41Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION: MS 91189 COILS, RADIOFREQUENCY, MOLDED, FIZED, SUBMINIATURE (PHENOLIC CORE) TYPES LTLK002 to LTLK016 INCL

ORGANIZATION:

CITY AND STATE:

CONTRACT NUMBER:

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING.

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:41Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-ED
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:41Z
Check the source to verify that this is the current version before use.