NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS9193(ASG)

FED. SUP CLASS
4730

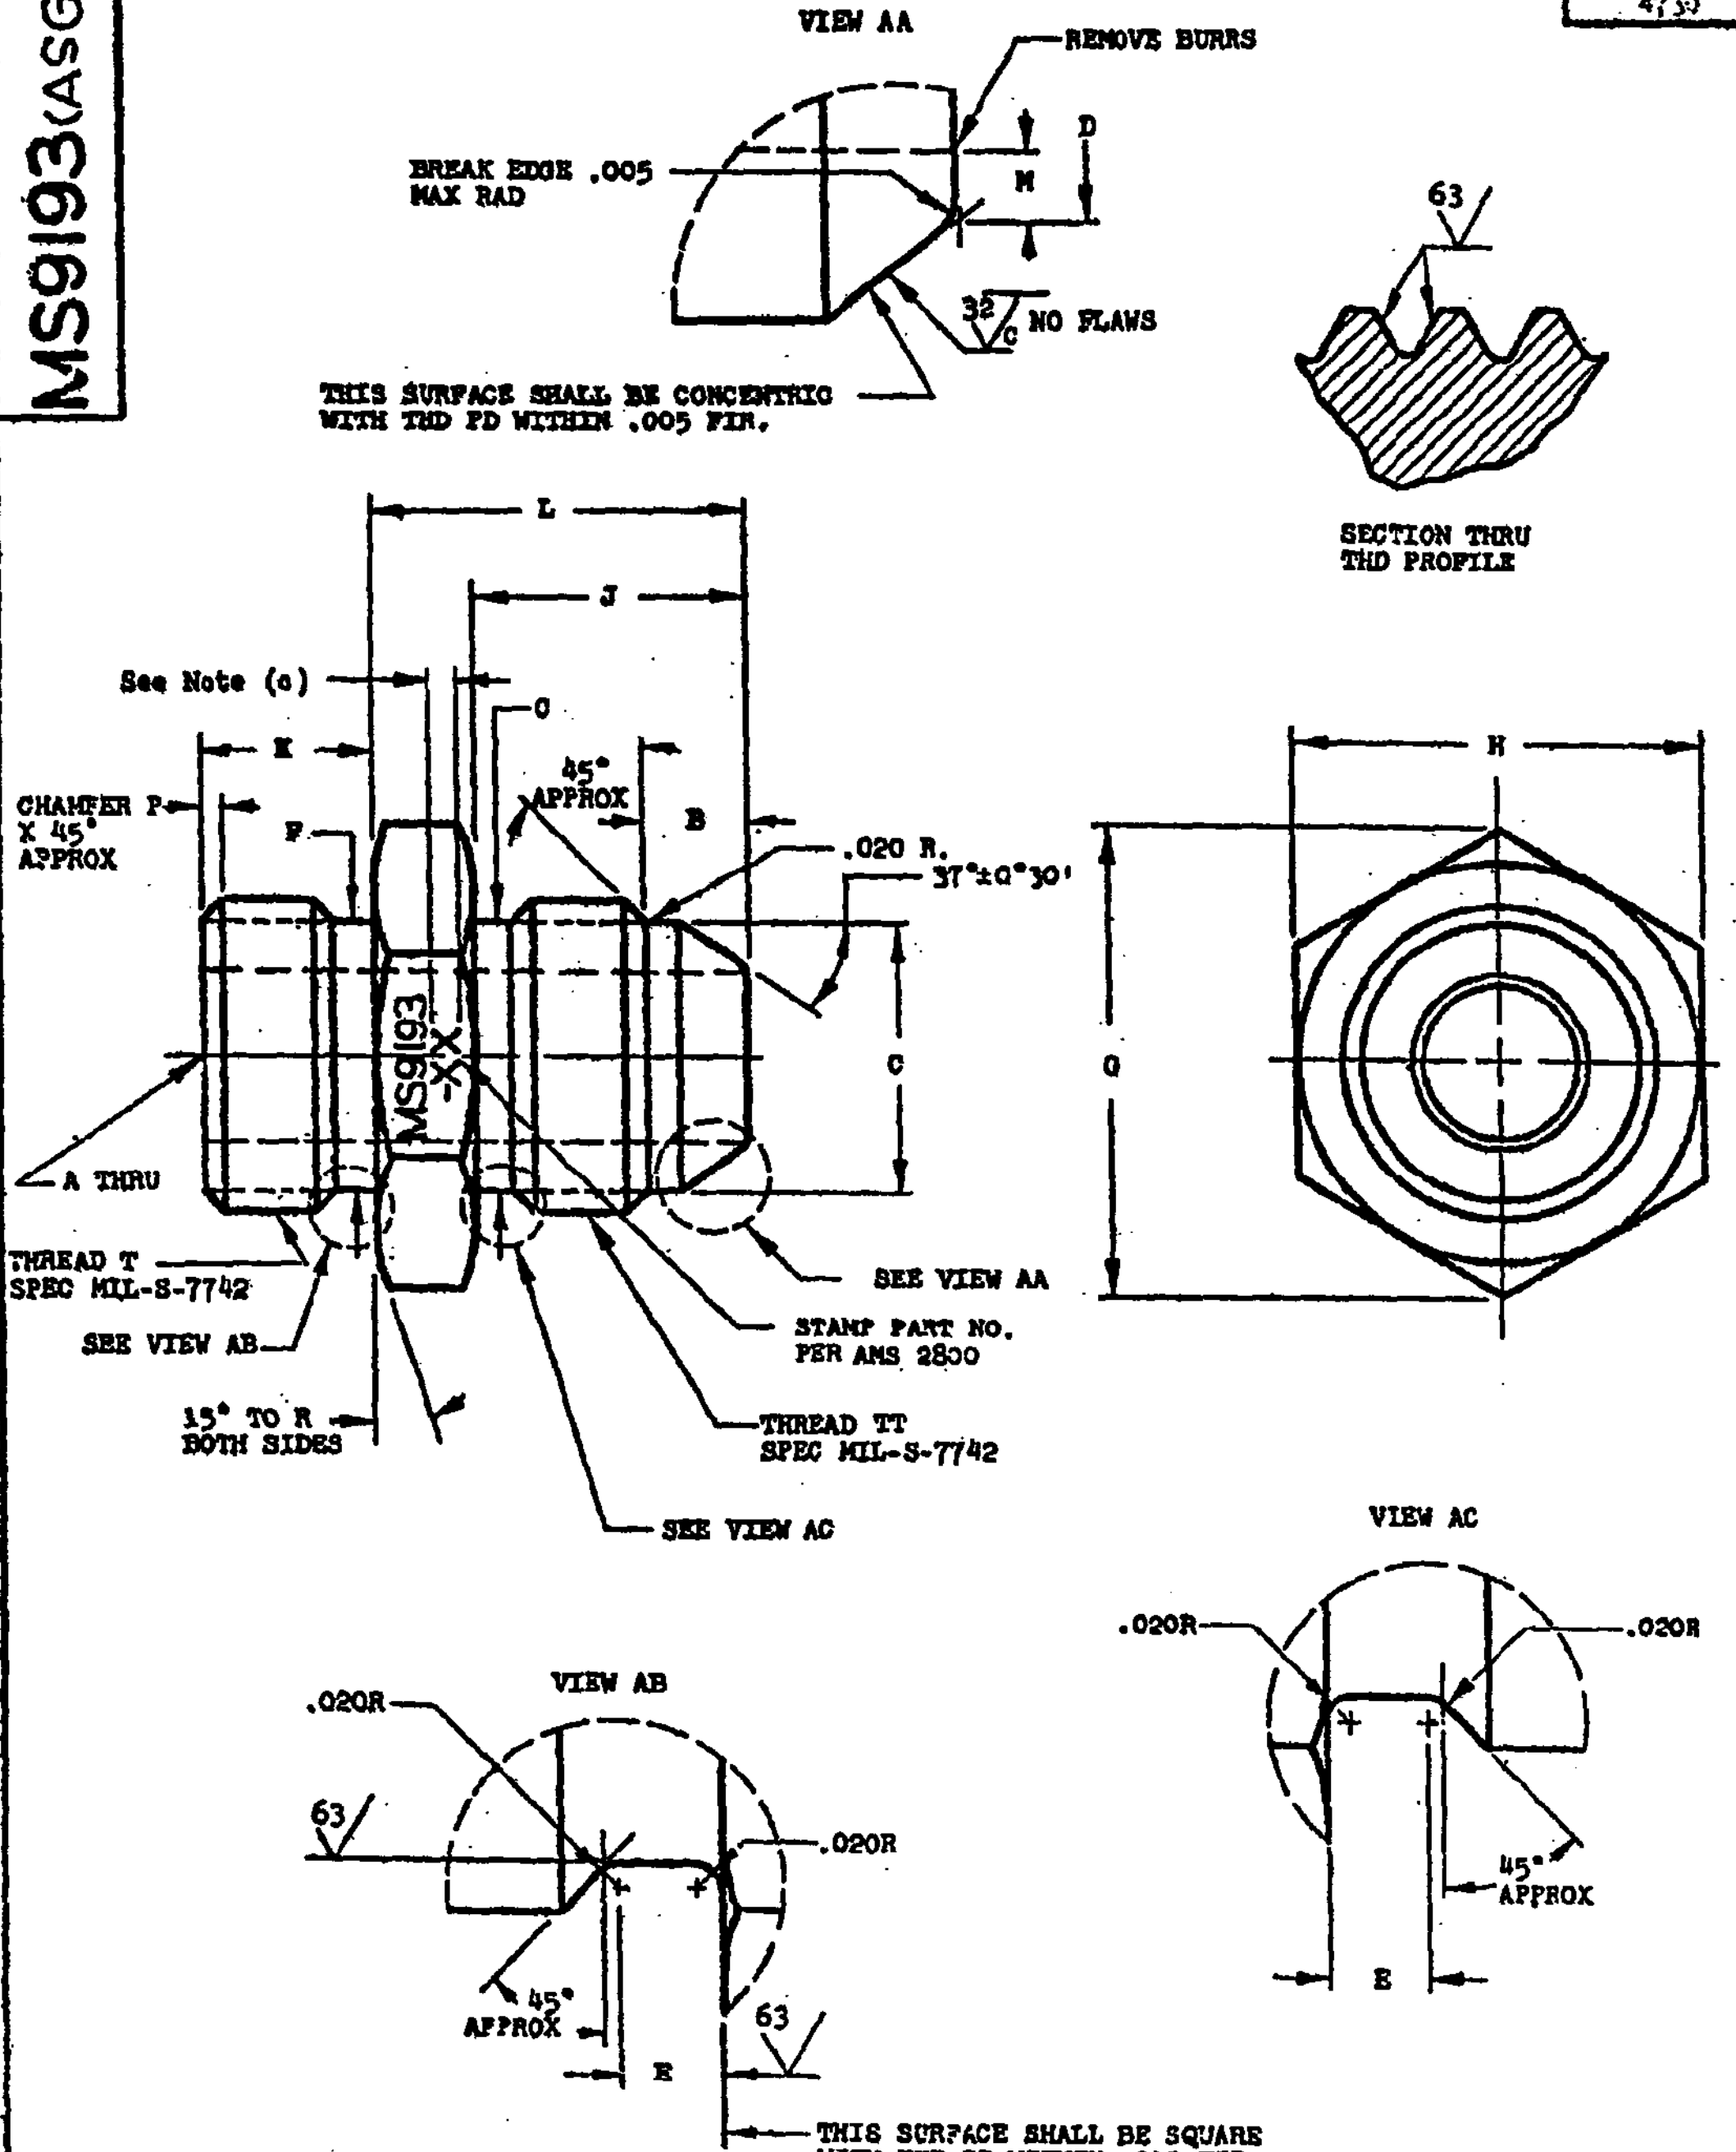

(a) DIA F SHALL BE FREE OF THREAD MARKS.
(b) DIAMETER F SHALL BE CONCENTRIC WITH PD OF THREAD WITHIN .0025 FIR.
(c) .020-.040 FOR SIZES -02, -03 and -04; .040-.060 FOR SIZES -05 THRU -16; .090-.150 FOR -18 AND LARGER SIZES.
(d) ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .010 FIR, UNLESS OTHERWISE SPECIFIED.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 11 Apr 60 REVISED

CUSTODIAN [illegible] Navy - Weps	**MILITARY STANDARD** NIPPLE, TUBE - AMS 5639, BOSS	**MS9193(ASG)** SHEET 1 OF 2
PROCUREMENT SPECIFICATION NONE		

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T13:12Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MS9193(ASG)

MATERIAL: CORROSION RESISTANT STEEL, AMS 5639
CLEANING: FINISHED PARTS SHALL BE DEGREASED AND IMMERSED FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.
SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010; ANGULAR DIMENSIONS ±5°.

DO NOT USE UNASSIGNED PART NUMBERS.

PART NO.		NOM TUBE OD	THREAD T	THREAD TT				A DIA	B +.015 -.000	C DIA +.000 -.010
				SIZE	MAJOR DIA	PD	MINOR DIA MAX			
MS9193-02		.125	.3125-24UNF-3A	.3125-24NS	.3023- .3095	.2797- .2824	.2584	.058- .065	.144	.245
MS9193-03		.188	.375 -24UNF-3A	.375-24NS	.3648- .3720	.3420- .3449	.3209	.121- .128	.144	.307
MS9193-04		.250	.4375-20UNF-3A	.4375-20NS	.4264- .4345	.3989- .4020	.3732	.168- .175	.160	.359
MS9193-05		.312	.500 -20UNF-3A	.500-20NS	.4889- .4970	.4613- .4645	.4357	.230- .237	.160	.421
MS9193-06		.375	.5625-18UNF-3A	.5625-18NS	.5508- .5595	.5200- .5234	.4913	.293- .301	.165	.476
MS9193-07		.438	.625 -18UNF-3A	.625-18NS	.6133- .6220	.5824- .5859	.5538	.355- .363	.165	.539
MS9193-08		.500	.750 -16UNF-3A	.750-16NS	.7376- .7470	.7026- .7064	.6703	.387- .395	.229	.654
MS9193-09		.562	.8125-16UN-3A	.8125-16NS	.8001- .8095	.7653- .7689	.7328	.434- .442	.229	.716
MS9193-10		.625	.875 -14UNF-3A	.875-14NS	.8617- .8720	.8215- .8256	.7844	.480- .488	.255	.767
MS9193-11		.688	1.000 -12UNF-3A	1.000-12NS	.9856- .9970	.9385- .9429	.8948	.542- .552	.304	.875
MS9193-12		.750	1.0625-12UN-3A	1.0625-12NS	1.0481-1.0595	1.0012-1.0054	.9573	.604- .614	.304	.938
MS9194-14		.875	1.1875-12UN-3A	1.1875-12NS	1.1731-1.1845	1.1261-1.1304	1.0823	.729- .739	.304	1.062
MS9193-16		1.000	1.3125-12UN-3A	1.3125-12NS	1.2981-1.3095	1.2511-1.2554	1.2073	.839- .851	.312	1.188
MS9193-18		1.125	1.500 -12UNF-3A	1.500-12NS	1.4856-1.4970	1.4381-1.4429	1.3948	.948- .960	.312	1.375
MS9193-20		1.250	1.625-12UN-3A	1.625-12NS	1.6106-1.6220	1.5635-1.5679	1.5198	1.073-1.086	.363	1.500
MS9193-24		1.500	1.875 -12UN-3A	1.875-12NS	1.8606-1.8720	1.8134-1.8179	1.7698	1.307-1.320	.374	1.750
MS9193-28		1.750	2.250 -12UN-3A	2.250-12NS	2.2356-2.2470	2.1884-2.1929	2.1448	1.542-1.557	.447	2.125
MS9193-32		2.000	2.500 -12UN-3A	2.500-12NS	2.4856-2.4970	2.4429-2.4383	2.3948	1.770-1.791	.457	2.375

PART NO.	D DIA ±.003	E +.015 -.000	F DIA +.002 -.003 (a)(b)	G MIN	H	J	K	L	M MIN	P	R DIA	APPROX WEIGHT LBS/EA
MS9193-02	.132	.063	.250	.631	.553- .564	.415	.360	.605	.030	.020-.050	.562	.026
MS9193-03	.195	.063	.312	.703	.616- .627	.446	.360	.636	.030	.020-.050	.625	.034
MS9193-04	.242	.075	.364	.775	.679- .690	.517	.400	.737	.030	.030-.060	.688	.048
MS9193-05	.304	.075	.426	.846	.741- .752	.517	.400	.737	.030	.030-.060	.750	.057
MS9193-06	.368	.083	.481	.916	.803- .814	.523	.400	.773	.030	.040-.070	.812	.069
MS9193-07	.430	.083	.544	.987	.865- .877	.523	.440	.773	.030	.040-.070	.875	.080
MS9193-08	.462	.094	.660	1.130	.990-1.002	.633	.440	.883	.030	.040-.070	1.000	.125
MS9193-09	.509	.094	.722	1.200	1.052-1.064	.633	.440	.883	.030	.040-.070	1.062	.141
MS9193-10	.555	.107	.773	1.270	1.114-1.127	.747	.440	1.057	.030	.050-.080	1.125	.182
MS9193-11	.619	.125	.882	1.484	1.301-1.314	.853	.440	1.163	.030	.050-.080	1.312	.255
MS9193-12	.681	.125	.945	1.556	1.364-1.377	.853	.480	1.163	.030	.050-.080	1.375	.282
MS9193-14	.806	.125	1.070	1.699	1.489-1.502	.898	.480	1.208	.030	.050-.080	1.500	.331
MS9193-16	.918	.125	1.195	1.842	1.614-1.627	.908	.480	1.268	.030	.050-.080	1.625	.407
MS9193-16	1.027	.125	1.382	1.983	1.738-1.752	.954	.480	1.314	.030	.050-.080	1.750	.522
MS9193-20	1.153	.125	1.507	2.126	1.863-1.877	.954	.480	1.314	.030	.050-.080	1.875	.573
MS9193-24	1.387	.125	1.756	2.411	2.113-2.127	1.079	.480	1.439	.030	.050-.080	2.125	.739
MS9193-28	1.652	.125	2.131	2.839	2.488-2.502	1.204	.480	1.594	.044	.050-.080	2.500	1.176
MS9193-32	1.886	.125	2.381	3.124	2.738-2.752	1.329	.480	1.719	.044	.050-.080	2.750	1.433

APPROVED REVISED

FED. SUP CLASS.
4730

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

CUSTODIANS
Navy - BuWeps
USAF

OTHER INT.
A -
N -
AF -

MILITARY STANDARD

NIPPLE, TUBE - AMS 5639, BOSS

MS9193(ASG)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1

Provided by IHS
No reproduction or networking permitted without license from IHS
Licensee=Defense Supply Ctr/5913977001
Not for Resale, 01/17/2007 15:00:51 MST
Source: https://assist.dla.mil -- Downloaded: 202610-23T13:12Z
Check the source to verify that this is the current version before use.