MS9689

FED. SUP CLASS
5305

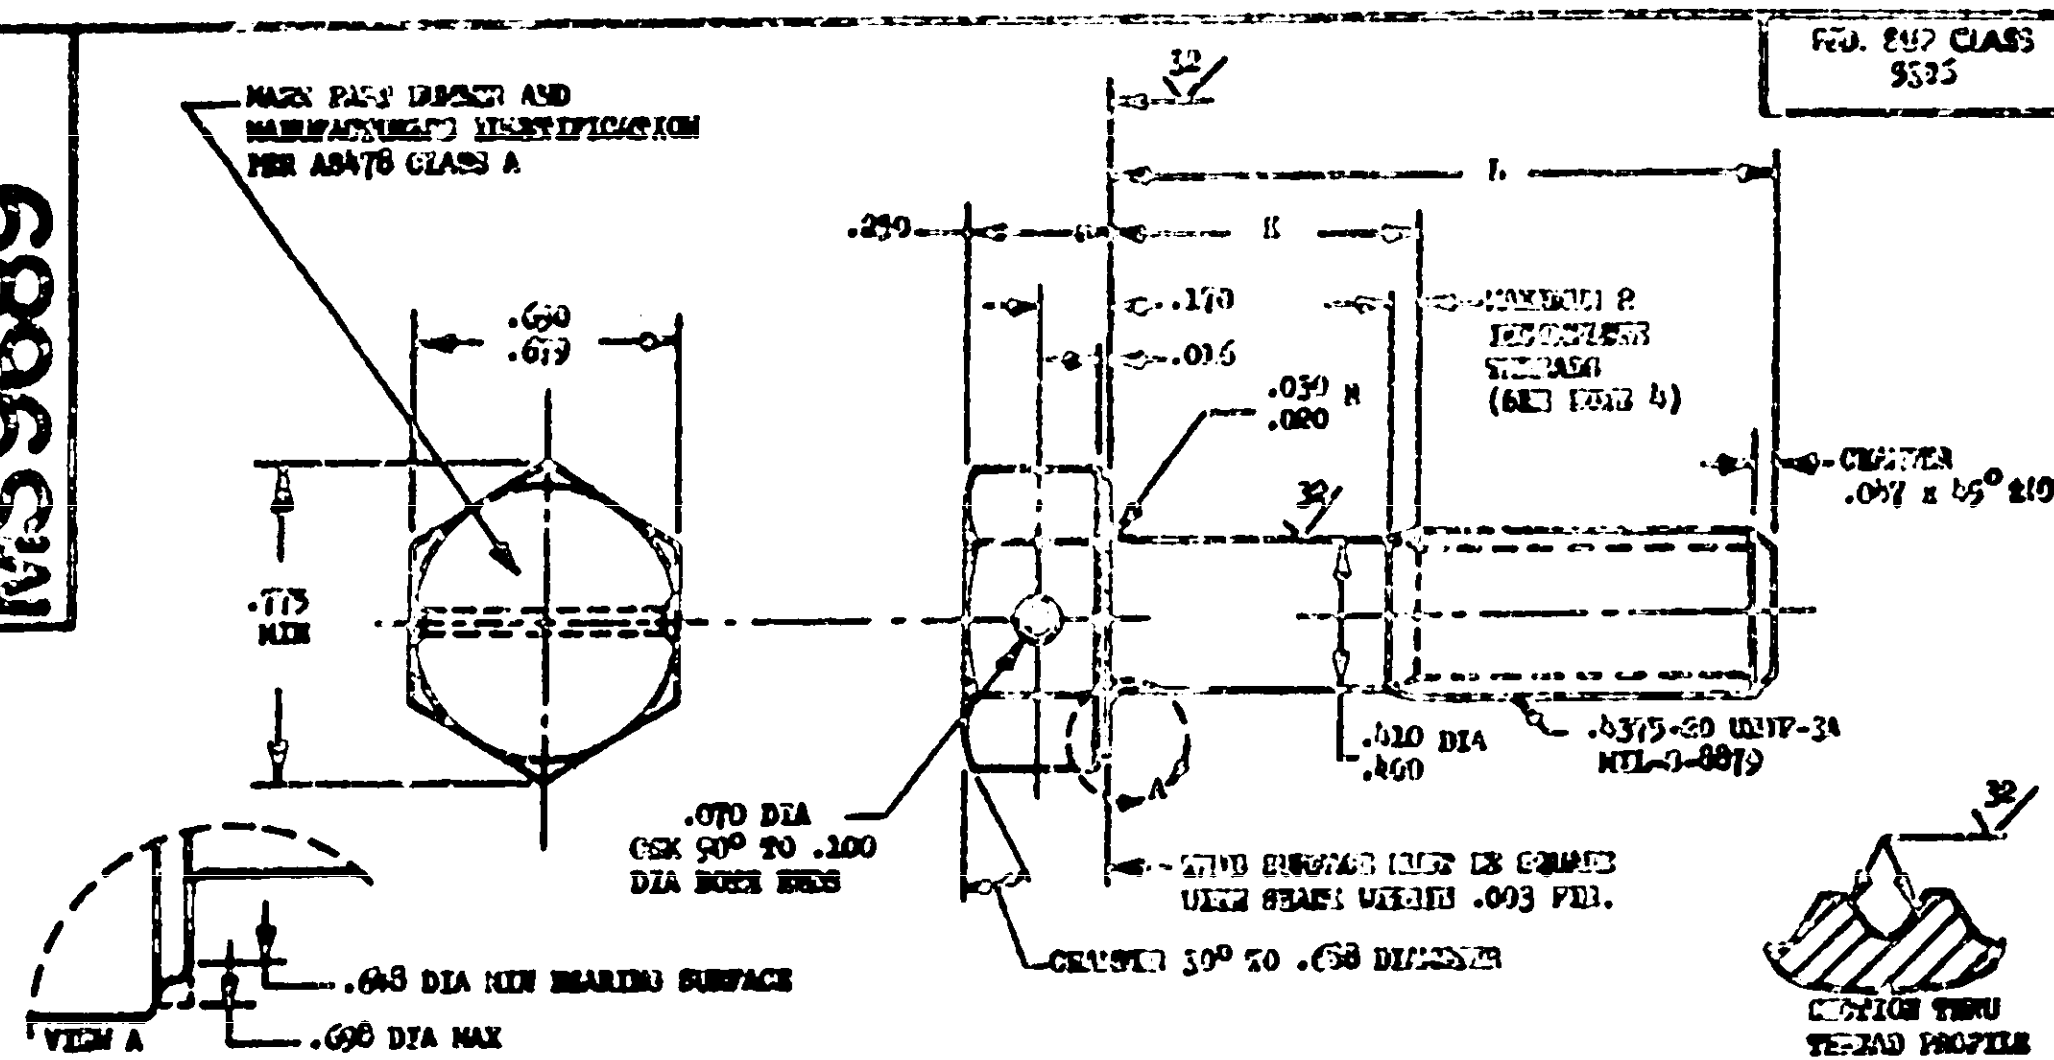

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9689-04	.688	.105- .125	5.78
MS9689-05	.750	.105- .125	6.01
MS9689-06	.812	.105- .125	6.24
MS9689-07	.875	.105- .125	6.47
MS9689-08	.938	.105- .125	6.69
MS9689-09	1.000	.105- .125	6.92
MS9689-10	1.062	.105- .125	7.15
MS9689-11	1.125	.105- .125	7.37
MS9689-12	1.188	.105- .125	7.60
MS9689-13	1.250	.105- .125	7.83
MS9689-14	1.312	.128- .188	8.05
MS9689-15	1.375	.190- .250	8.28
MS9689-16	1.438	.252- .312	8.51
MS9689-17	1.500	.315- .375	8.74
MS9689-18	1.562	.378- .438	8.97
MS9689-19	1.625	.440- .500	9.19
MS9689-20	1.688	.502- .562	9.42
MS9689-21	1.750	.565- .625	9.65
MS9689-22	1.812	.628- .688	9.88
MS9689-23	1.875	.690- .750	10.10
MS9689-24	1.938	.752- .812	10.33
MS9689-25	2.000	.815- .875	10.56
MS9689-26	2.125	.940-1.000	11.01
MS9689-27	2.250	1.065-1.125	11.47
MS9689-28	2.375	1.190-1.250	11.92
MS9689-29	2.500	1.315-1.375	12.38
MS9689-30	2.625	1.440-1.500	12.83

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9689-31	2.750	1.565-1.625	13.29
MS9689-32	2.875	1.690-1.750	13.74
MS9689-33	3.000	1.815-1.875	14.20
MS9689-34	3.125	1.940-2.000	14.65
MS9689-35	3.250	2.065-2.125	15.11
MS9689-36	3.375	2.190-2.250	15.56
MS9689-37	3.500	2.315-2.375	16.02
MS9689-38	3.625	2.440-2.500	16.47
MS9689-39	3.750	2.565-2.625	16.93
MS9689-40	3.875	2.690-2.750	17.38
MS9689-41	4.000	2.815-2.875	17.84
MS9689-42	4.125	2.940-3.000	18.29
MS9689-43	4.250	3.065-3.125	18.74
MS9689-44	4.375	3.190-3.250	19.20
MS9689-45	4.500	3.315-3.375	19.65
MS9689-46	4.625	3.440-3.500	20.11
MS9689-47	4.750	3.565-3.625	20.56
MS9689-48	4.875	3.690-3.750	21.02
MS9689-49	5.000	3.815-3.875	21.47
MS9689-50	5.125	3.940-4.000	21.93
MS9689-51	5.250	4.065-4.125	22.38
MS9689-52	5.375	4.190-4.250	22.84
MS9689-53	5.500	4.315-4.375	23.29
MS9689-54	5.625	4.440-4.500	23.75
MS9689-55	5.750	4.565-4.625	24.20
MS9689-56	5.875	4.690-4.750	24.66
MS9689-57	6.000	4.815-4.875	25.11

1. SHANK SHALL BE STRAIGHT WITHIN .0025 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .005 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .019 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL CADMIUM PLATE PER AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION: AMS 7459.
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PARTS STANDARDS DIVISION.

REVISED

APPROVED [illegible] Jul 71

This standard has been approved by the Department of Air Force and the Department of the Navy (AS) and is mandatory for use by those activities. All other military activities are requested to employ this standard where suitable.

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .4375-20 UNJF-3A	MILITARY STANDARD MS9689
PROCUREMENT SPECIFICATION AMS7459		SUPERSEDES:	SHEET 1 OF 1

DD 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.