
MS9801

FED. SUP CLASS
5306

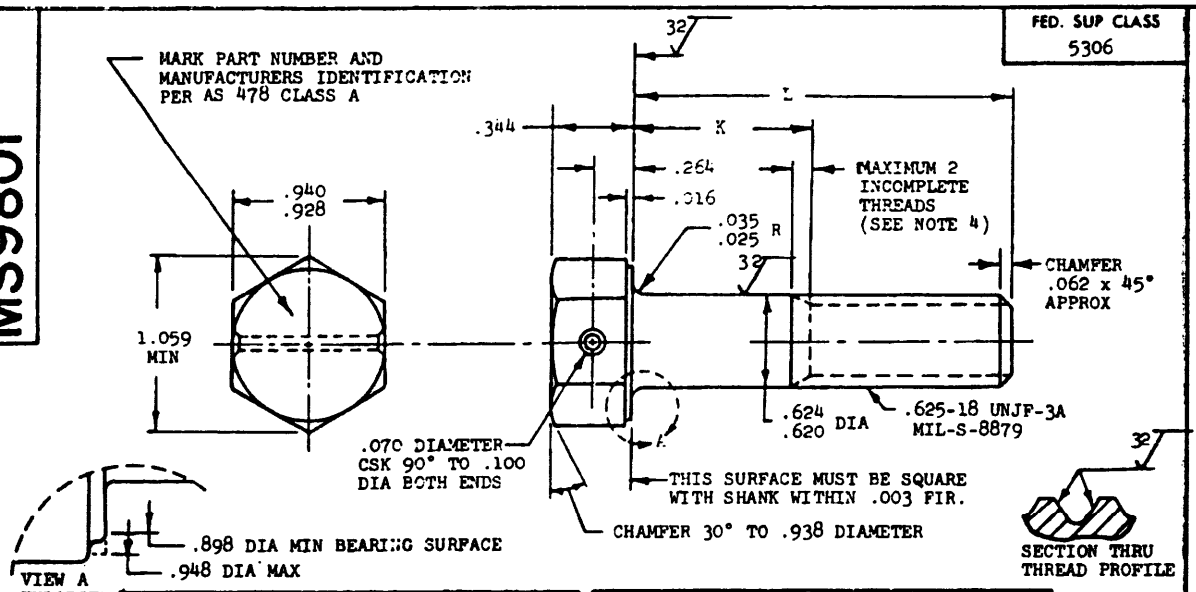

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9801-15	1.688	.128- .188	21.70
MS9801-16	1.750	.190- .250	22.23
MS9801-17	1.812	.252- .312	22.77
MS9801-18	1.875	.315- .375	23.30
MS9801-19	1.938	.378- .438	23.83
MS9801-20	2.000	.440- .500	24.37
MS9801-21	2.125	.565- .625	25.44
MS9801-22	2.250	.690- .750	26.51
MS9801-23	2.375	.815- .875	27.59
MS9801-24	2.500	.940-1.000	28.65
MS9801-25	2.625	1.065-1.125	29.73
MS9801-26	2.750	1.190-1.250	30.80
MS9801-27	2.875	1.315-1.375	31.87
MS9801-28	3.000	1.440-1.500	32.94
MS9801-29	3.125	1.565-1.625	34.02
MS9801-30	3.250	1.690-1.750	35.08
MS9801-31	3.375	1.815-1.875	36.16
MS9801-32	3.500	1.940-2.000	37.23
MS9801-33	3.625	2.065-2.125	38.32
MS9801-34	3.750	2.190-2.250	39.37
MS9801-35	3.875	2.315-2.375	40.45
MS9801-36	4.000	2.440-2.500	41.51
MS9801-37	4.125	2.565-2.625	42.59
MS9801-38	4.250	2.690-2.750	43.65
MS9801-39	4.375	2.815-2.875	44.72
MS9801-40	4.500	2.940-3.000	45.80
MS9801-41	4.625	3.065-3.125	46.86
MS9801-42	4.750	3.190-3.250	47.94
MS9801-43	4.875	3.315-3.375	49.01
MS9801-44	5.000	3.440-3.500	50.08
MS9801-45	5.125	3.565-3.625	51.15
MS9801-46	5.250	3.690-3.750	52.23
MS9801-47	5.375	3.815-3.875	53.29
MS9801-48	5.500	3.940-4.000	54.37
MS9801-49	5.625	4.065-4.125	55.44
MS9801-50	5.750	4.190-4.250	56.51
MS9801-51	5.875	4.315-4.375	57.58
MS9801-52	6.000	4.440-4.500	58.66

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .C03-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

(B) REINSTATED 15 AUG 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED (A) 21 DEC 83 (B) 15 AUG 84

Revise activities:
(B) AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Office Data AV (B) 99	(B)	BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, FULL SHANK, AMS 5643, .625-18 UNJF-3A	MS9801
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0855

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.