MS9838

FED. SUP CLASS
5307

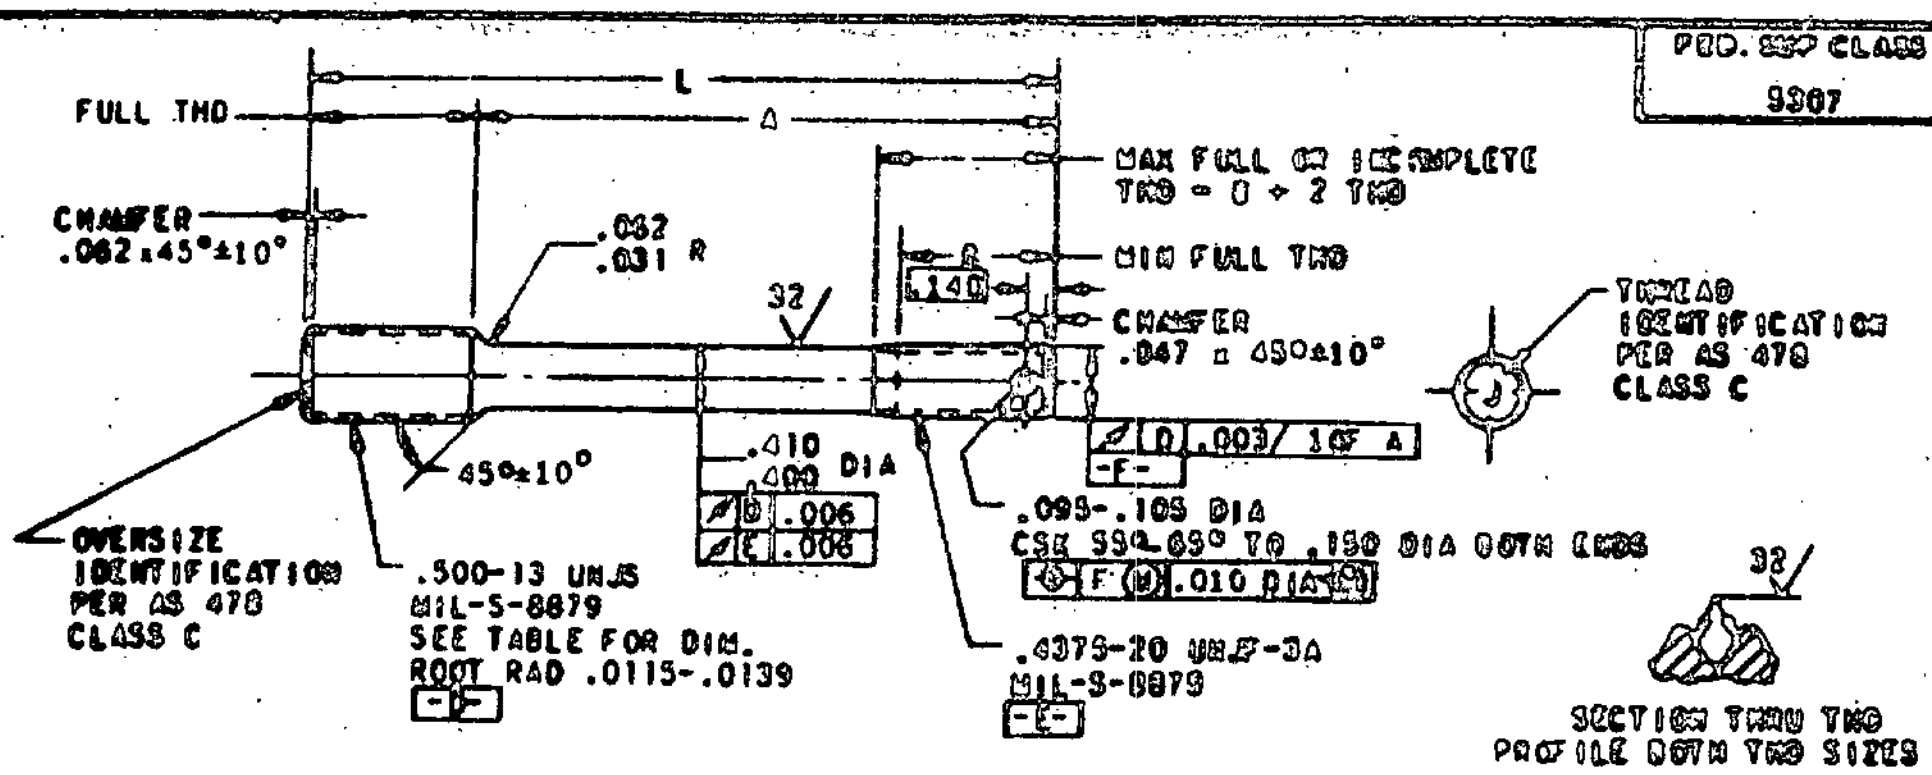

OVERSIZE IDENTIFICATION			STANDARD	+.003	+.006	+.009	+.012	STANDARD
			○	③	⑥	⑨	⑫	
MAJOR DIAMETER PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD MINOR DIA			.495-.500 .4548-.4558 .4553-.4568 .4480-.4500 .4118-.4179	.495-.500 .4578-.4588 .4583-.4598 .4510-.4530 .4148-.4209	.495-.500 .4608-.4618 .4613-.4628 .4540-.4560 .4178-.4239	.504-.509 .4638-.4648 .4643-.4658 .4570-.4590 .4208-.4269	.504-.509 .4668-.4678 .4673-.4688 .4600-.4620 .4238-.4299	APPROX WEIGHT LBS/100
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
1.750	.750	.625	MS9838-011	MS9838-012	MS9838-013	MS9838-014	MS9838-015	7.28
1.812	.812	.688	MS9838-016	MS9838-017	MS9838-018	MS9838-019	MS9838-020	7.50
1.875	.875	.750	MS9838-021	MS9838-022	MS9838-023	MS9838-024	MS9838-025	7.73
1.938	.938	.750	MS9838-026	MS9838-027	MS9838-028	MS9838-029	MS9838-030	7.96
2.000	1.000	.750	MS9838-031	MS9838-032	MS9838-033	MS9838-034	MS9838-035	8.19
2.062	1.062	.750	MS9838-036	MS9838-037	MS9838-038	MS9838-039	MS9838-040	8.42
2.125	1.125	.750	MS9838-041	MS9838-042	MS9838-043	MS9838-044	MS9838-045	8.65
2.188	1.188	.750	MS9838-046	MS9838-047	MS9838-048	MS9838-049	MS9838-050	8.88
2.250	1.250	.750	MS9838-051	MS9838-052	MS9838-053	MS9838-054	MS9838-055	9.10
2.312	1.312	.750	MS9838-056	MS9838-057	MS9838-058	MS9838-059	MS9838-060	9.33
2.375	1.375	.750	MS9838-061	MS9838-062	MS9838-063	MS9838-064	MS9838-065	9.56
2.438	1.438	.750	MS9838-066	MS9838-067	MS9838-068	MS9838-069	MS9838-070	9.79
2.500	1.500	.750	MS9838-071	MS9838-072	MS9838-073	MS9838-074	MS9838-075	10.02
2.562	1.562	.750	MS9838-076	MS9838-077	MS9838-078	MS9838-079	MS9838-080	10.24
2.625	1.625	.750	MS9838-081	MS9838-082	MS9838-083	MS9838-084	MS9838-085	10.47
2.688	1.688	.750	MS9838-086	MS9838-087	MS9838-088	MS9838-089	MS9838-090	10.70
2.750	1.750	.750	MS9838-091	MS9838-092	MS9838-093	MS9838-094	MS9838-095	10.93
2.875	1.875	.750	MS9838-096	MS9838-097	MS9838-098	MS9838-099	MS9838-100	11.38
3.000	2.000	.750	MS9838-101	MS9838-102	MS9838-103	MS9838-104	MS9838-105	11.84
3.125	2.125	.750	MS9838-106	MS9838-107	MS9838-108	MS9838-109	MS9838-110	12.30
3.250	2.250	.750	MS9838-111	MS9838-112	MS9838-113	MS9838-114	MS9838-115	12.75
3.375	2.375	.750	MS9838-116	MS9838-117	MS9838-118	MS9838-119	MS9838-120	13.21
3.500	2.500	.750	MS9838-121	MS9838-122	MS9838-123	MS9838-124	MS9838-125	13.67
3.625	2.625	.750	MS9838-126	MS9838-127	MS9838-128	MS9838-129	MS9838-130	14.12
3.750	2.750	.750	MS9838-131	MS9838-132	MS9838-133	MS9838-134	MS9838-135	14.58
3.875	2.875	.750	MS9838-136	MS9838-137	MS9838-138	MS9838-139	MS9838-140	15.04
4.000	3.000	.750	MS9838-141	MS9838-142	MS9838-143	MS9838-144	MS9838-145	15.49
4.125	3.125	.750	MS9838-146	MS9838-147	MS9838-148	MS9838-149	MS9838-150	15.95
4.250	3.250	.750	MS9838-151	MS9838-152	MS9838-153	MS9838-154	MS9838-155	16.40
4.375	3.375	.750	MS9838-156	MS9838-157	MS9838-158	MS9838-159	MS9838-160	16.86
4.500	3.500	.750	MS9838-161	MS9838-162	MS9838-163	MS9838-164	MS9838-165	17.32
4.625	3.625	.750	MS9838-166	MS9838-167	MS9838-168	MS9838-169	MS9838-170	17.85
4.750	3.750	.750	MS9838-171	MS9838-172	MS9838-173	MS9838-174	MS9838-175	18.23
4.875	3.875	.750	MS9838-176	MS9838-177	MS9838-178	MS9838-179	MS9838-180	18.69
5.000	4.000	.750	MS9838-181	MS9838-182	MS9838-183	MS9838-184	MS9838-185	19.14
5.125	4.125	.750	MS9838-186	MS9838-187	MS9838-188	MS9838-189	MS9838-190	19.60
5.250	4.250	.750	MS9838-191	MS9838-192	MS9838-193	MS9838-194	MS9838-195	20.06
5.375	4.375	.750	MS9838-196	MS9838-197	MS9838-198	MS9838-199	MS9838-200	20.51
5.500	4.500	.750	MS9838-201	MS9838-202	MS9838-203	MS9838-204	MS9838-205	20.97

1. MATERIAL: STEEL, AMS 6320, AMS 6322 OR AMS 6327
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966.
6. MANUFACTURING SPECIFICATION: AMS 7450 EXCEPT THREAD FORM.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010.
10. MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION ON CONTAINER.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 27 Aug 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS	TITLE STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, STEEL .500-13 UNJS x .4375-20 UNJF	MILITARY STANDARD MS 9838
PROCUREMENT SPECIFICATION AMS7456	SUPERSEDES:	SHEET 1 OF 1

This standard has been approved by the Dept. of the Air Force and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
Air Force - 82

DD FORM 1 SEP 66 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-159/2043

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.