
MIL-C-81659/56A (NAVY)
16 December 1971
SUPERSEDING
MIL-C-81659/56 (NAVY)
21 July 1971


MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, RECEPTACLE, ENVIRONMENT RESISTANT, CRIMP CONTACTS, TRIPLE INSERT, TYPE II, CLASS 2 (–65° C to +200° C), SERIES 2, SHELL DESIGNATOR B


The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81659

This specification is mandatory for use by all activities of the Department of the Navy

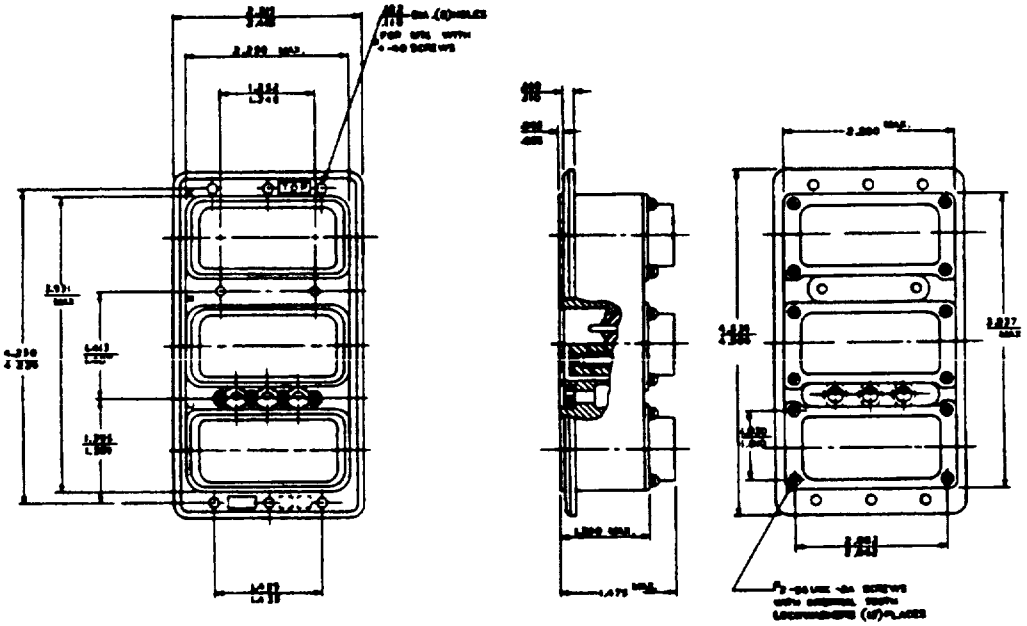

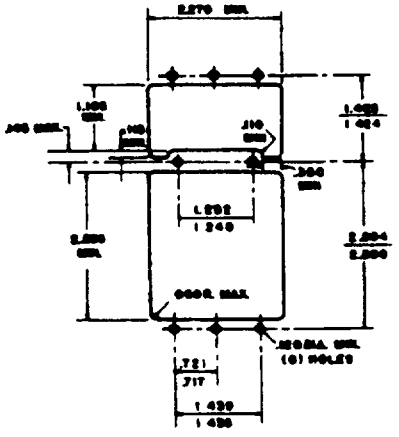

Suggested Panel Cutout Dimensions



.125 max. total material between flanges.

Recommended Mated Position

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.

NOTES:

1. Unless otherwise specified, dimensions in inches, tolerances: decimals ± .010.
2. Dimensions apply after plating.
3. Normal (01) polarization position shown. For alternate positions see MIL-C-81659.

REQUIREMENTS:

1. Insert arrangements shall be in accordance with MS3157.
2. Contacts shall be in accordance with MIL-C-39029/11 or MIL-C-39029/12 as applicable.
3. Insertion and removal tools shall be in accordance with MS3156.

Custodian:
Navy - AS

Preparing activity:
Navy - AS

Review activities:
Navy - EC, OS

(Project No. 5935-N-791-48)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Engineering Specifications and Standards Department (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

MIL-C-81659/56A(NAVY) CONNECTORS, ELECTRICAL, RECTANGULAR, RECEPTACLE, ENVIRONMENT RESISTANT, CRIMP CONTACTS, TRIPLE INSERT, TYPE II, CLASS 2 (-65°C TO +200°C), SERIES 2, SHELL DESIGNATOR B.

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426 REPLACES DD FORM 1426 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:53Z
Check the source to verify that this is the current version before use.