MIL-F-52525/15A
30 June 1987

SUPERSEDING
MIL-F-52525/15
11 October 1978

MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, TYPE 100R10, FOR USE WITH TYPE 100R10 4-SPIRAL WRAP HOSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fittings described herein shall consist of this specification and the latest issue of MIL-F-52525.

REQUIREMENTS:

1. The fittings shall conform to figure 1 and table I.

AMSC N/A FSC 4730
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R10 fittings.1/

Specification part number	Hose dash number	Hose I.D. (REF)	Tube dash number	Flange head dash No.	Flange head size inch	C inch	C mm	D inch	D mm
M52525/15-12-12	12	3/4	12	-12	3/4	5.28	134.11	1.94	49.28
M52525/15-16-16	16	1	16	-16	1	5.84	148.34	2.03	51.56
M52525/15-20-20	20	1-1/4	20	-20	1-1/4	7.86	199.64	3.00	76.20
M52525/15-24-24	24	1-1/2	24	-24	1-1/2	8.85	224.79	2.87	72.90

Specification part number	Hose dash number	Hose I.D. (REF)	Tube dash number	Flange head dash No.	Flange head size inch	F inch	F mm	O Nominal
M52525/15-12-12	12	3/4	12	-12	3/4	2.06	52.32	1-5/8
M52525/15-16-16	16	1	16	-16	1	2.38	60.45	2
M52525/15-20-20	20	1-1/4	20	-20	1-1/4	2.62	66.55	2-5/8
M52525/15-24-24	24	1-1/2	24	-24	1-1/2	3.13	79.50	2-7/8

1/ All dimensions not shown shall conform to SAE J516.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

2. Maximum operating pressure shall be as specified in table II.

TABLE II. Maximum operating pressures of fittings.

Hose I.D. (REF) (inch)	PSI (pounds per square inch)	MPa (megapascals)
3/4	5000	34.5
1	4000	27.6
1-1/4	3000	20.7
1-1/2	2500	17.2


3. Marking shall include the manufacturer's name or trademark, size, and hose identifier R-10. Location of marking is optional.

4. This item must be listed on QPL-52525.

INTENDED USE: Type 100R10 fittings are for use with 4-spiral wrap reinforced hose conforming to MIL-H-52471, type 100R10.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

EXAMPLE: Military specification part number

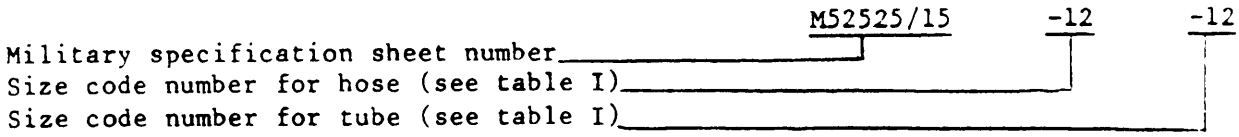

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Elbow, Hose to Flange.

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activities
Army - GL
DLA - CS

Project 4730-0528

User activity:
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

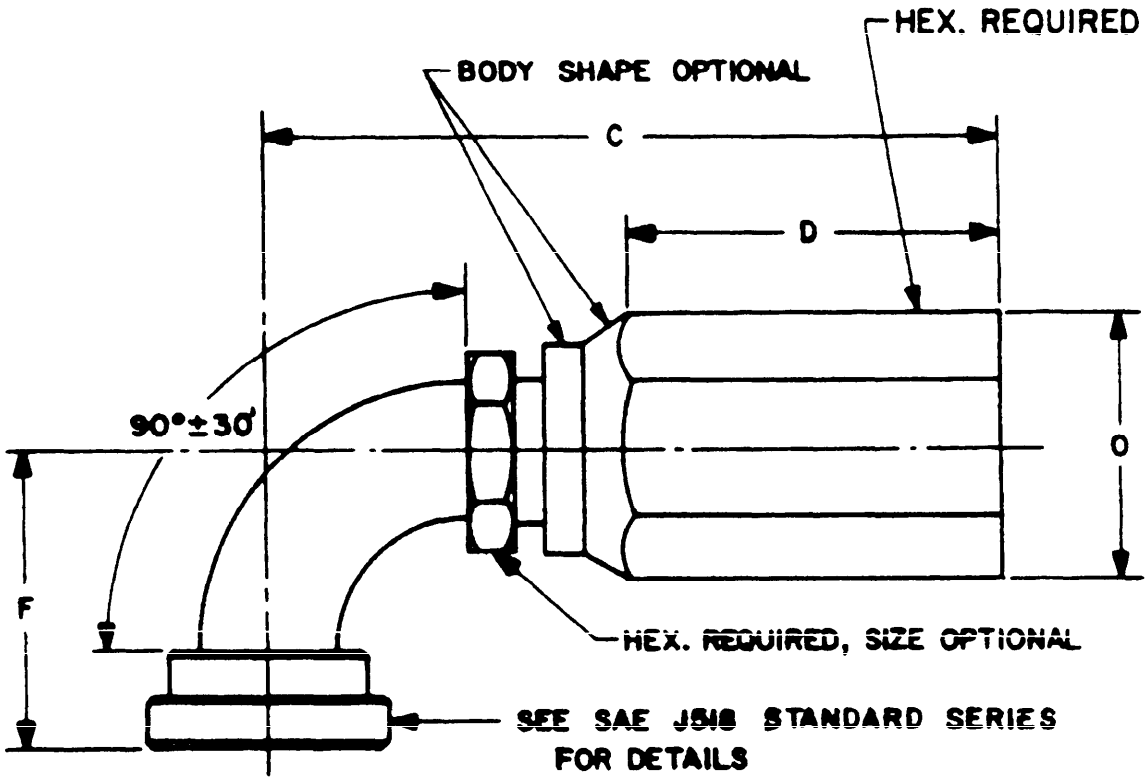


FIGURE 1. Fitting, screw-on to 4 bolt split flange, 90° bent tube.

X-3362A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.