
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED PLASTIC DIELECTRIC, DC, IN NON-METAL CASES, ESTABLISHED RELIABILITY STYLE CFR15

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-55514.

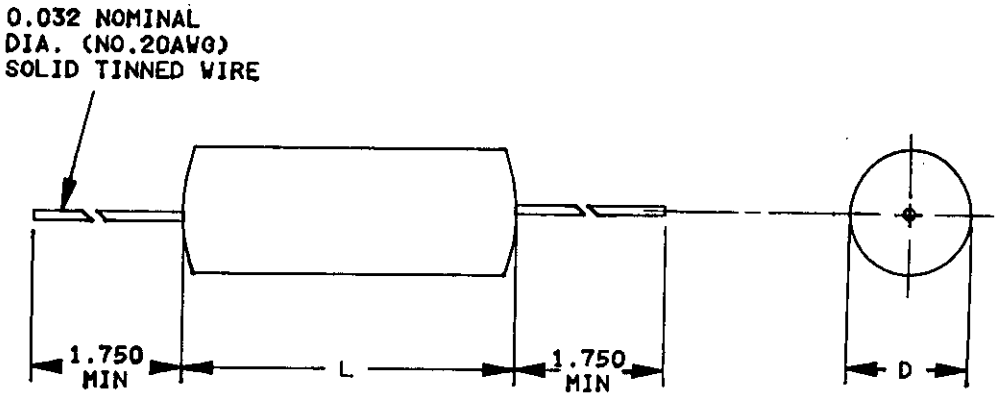

INCHES	MM
.032	.81
1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style CFR15 capacitors.

Ⓑ denotes changes

FSC 5910

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Characteristic K, style CFR15 capacitors							Ⓑ
Type designation 1/	Capacitance (µF)	Capacitance tolerance available	Voltage dc at 105°C (volts)	Voltage at 85°C at 20 kHz (volts)	dv/dt volt/µs (volts)	D	L ±.062
CFR15AKC123--	.012	J, K, M	200	60	300	.179(4.55) ±.047(1.19)	.750(19.05)
CFR15AKC153--	.015	"	"	"	"	.197(5.00) ±.047(1.19)	.750(19.05)
CFR15AKC183--	.018	"	"	"	"	.212(5.39) ±.047(1.19)	.750(19.05)
CFR15AKC223--	.022	"	"	"	"	.232(5.89) ±.047(1.19)	.750(19.05)
CFR15AKC273--	.027	"	"	"	"	.251(6.38) ±.062(1.57)	.750(19.05)
CFR15AKC333--	.033	"	"	"	"	.263(6.68) ±.062(1.57)	.750(19.05)
CFR15AKC393--	.039	"	"	"	"	.242(6.15) ±.062(1.57)	.938(23.83)
CFR15AKC473--	.047	"	"	"	"	.261(6.63) ±.062(1.57)	.938(23.83)
CFR15AKC563--	.056	"	"	"	"	.270(6.86) ±.062(1.57)	.938(23.83)
CFR15AKC683--	.068	"	"	"	"	.297(7.54) ±.062(1.57)	.938(23.83)
CFR15AKC823--	.082	"	"	40	"	.259(6.58) ±.062(1.57)	1.250(31.75)
CFR15AKC104--	.10	"	"	"	"	.284(7.21) ±.062(1.57)	1.250(31.75)
CFR15AKC124--	.12	"	"	"	"	.310(7.87) ±.062(1.57)	1.250(31.75)
CFR15AKC154--	.15	"	"	"	"	.345(8.76) ±.062(1.57)	1.250(31.75)
CFR15AKC184--	.18	"	"	"	"	.377(9.58) ±.062(1.57)	1.250(31.75)
CFR15AKC224--	.22	"	"	"	"	.416(10.57) ±.062(1.57)	1.250(31.75)
CFR15AKC274--	.27	"	"	"	"	.389(9.88) ±.062(1.57)	1.688(42.88)
CFR15AKC334--	.33	"	"	"	"	.427(10.85) ±.062(1.57)	1.688(42.88)
CFR15AKC394--	.39	"	"	"	"	.462(11.74) ±.062(1.57)	1.688(42.88)
CFR15AKC474--	.47	"	"	"	"	.501(12.73) ±.093(2.36)	1.688(42.88)
CFR15AKC564--	.56	"	"	"	"	.635(16.13) ±.093(2.36)	1.688(42.88)
CFR15AKC684--	.68	"	"	"	"	.706(17.93) ±.093(2.36)	1.688(42.88)
CFR15AKC824--	.82	"	"	"	"	.675(17.15) ±.093(2.36)	2.063(52.40)
CFR15AKC105--	1.00	"	"	"	"	.748(19.00) ±.093(2.36)	2.063(52.40)
CFR15AKE682--	.0068	"	400	95	400	.217(5.51) ±.047(1.19)	.750(19.05)
CFR15AKE822--	.0082	"	"	"	"	.230(5.84) ±.047(1.19)	.750(19.05)
CFR15AKE103--	.01	"	"	"	"	.232(5.89) ±.047(1.19)	.750(19.05)
CFR15AKE123--	.012	"	"	"	"	.250(6.35) ±.047(1.19)	.750(19.05)
CFR15AKE153--	.015	"	"	"	"	.260(6.60) ±.062(1.57)	.750(19.05)
CFR15AKE183--	.018	"	"	"	"	.243(6.17) ±.047(1.19)	.938(23.83)
CFR15AKE223--	.022	"	"	"	"	.262(6.66) ±.062(1.57)	.938(23.83)
CFR15AKE273--	.027	"	"	"	"	.275(6.98) ±.062(1.57)	.938(23.83)
CFR15AKE333--	.033	"	"	"	"	.301(7.65) ±.062(1.57)	.938(23.83)
CFR15AKE393--	.039	"	"	50	"	.261(6.63) ±.062(1.57)	1.250(31.75)
CFR15AKE473--	.047	"	"	"	"	.284(7.21) ±.062(1.57)	1.250(31.75)
CFR15AKE563--	.056	"	"	"	"	.307(7.80) ±.062(1.57)	1.250(31.75)
CFR15AKE683--	.068	"	"	"	"	.336(8.53) ±.062(1.57)	1.250(31.75)
CFR15AKE823--	.082	"	"	"	"	.367(9.32) ±.062(1.57)	1.250(31.75)
CFR15AKE104--	.1	"	"	"	"	.466(11.84) ±.062(1.57)	1.250(31.75)
CFR15AKE124--	.12	"	"	"	"	.441(11.20) ±.062(1.57)	1.250(31.75)
CFR15AKE154--	.15	"	"	"	"	.491(12.47) ±.062(1.57)	1.250(31.75)
CFR15AKE184--	.18	"	"	"	"	.456(11.58) ±.062(1.57)	1.688(42.88)
CFR15AKE224--	.22	"	"	"	"	.500(12.73) ±.062(1.57)	1.688(42.88)
CFR15AKE274--	.27	"	"	"	"	.533(13.54) ±.093(2.36)	1.688(42.88)
CFR15AKE334--	.33	"	"	"	"	.591(15.01) ±.093(2.36)	1.688(42.88)
CFR15AKE394--	.39	"	"	"	"	.643(16.33) ±.093(2.36)	1.688(42.88)
CFR15AKE474--	.47	"	"	"	"	.708(17.98) ±.093(2.36)	1.688(42.88)
CFR15AKE564--	.56	"	"	"	"	.749(19.02) ±.093(2.36)	2.438(61.93)
CFR15AKE684--	.68	"	"	"	"	.818(20.78) ±.093(2.36)	2.438(61.93)

- - -

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Characteristic K, style CFR15 capacitors							Ⓑ
Type designation 1/	Capacitance (µF)	Capacitance tolerance available	Voltage dc at 105°C (volts)	Voltage at 85°C at 20 kHz (volts)	dv/dt volt/µs (volts)	D	L ±.062
CFR15AKE824--	.82	J, K, M	400	50	400	.901(22.89) ±.093(2.36)	2.438(61.93)
CFR15AKE105--	1.00	"	400	50	400	.998(25.35) ±.093(2.36)	2.438(61.93)
CFR15AKF102--	.001	"	600	110	500	.243(6.17) ±.047(1.19)	.750(19.05)
CFR15AKF122--	.0012	"	"	"	"	.253(6.53) ±.062(1.57)	.750(19.05)
CFR15AKF152--	.0015	"	"	"	"	.261(6.63) ±.062(1.57)	.750(19.05)
CFR15AKF182--	.0018	"	"	"	"	.299(7.60) ±.062(1.57)	.750(19.05)
CFR15AKF222--	.0022	"	"	"	"	.257(6.53) ±.062(1.57)	.750(19.05)
CFR15AKF272--	.0027	"	"	"	"	.265(6.73) ±.062(1.57)	.750(19.05)
CFR15AKF332--	.0033	"	"	"	"	.240(6.10) ±.047(1.19)	.750(19.05)
CFR15AKF392--	.0039	"	"	"	"	.253(6.43) ±.062(1.57)	.750(19.05)
CFR15AKF472--	.0047	"	"	"	"	.258(6.55) ±.062(1.57)	.750(19.05)
CFR15AKF562--	.0056	"	"	"	"	.265(6.73) ±.062(1.57)	.750(19.05)
CFR15AKF682--	.0068	"	"	"	"	.268(6.81) ±.062(1.57)	.750(19.05)
CFR15AKF822--	.0082	"	"	"	"	.257(6.53) ±.062(1.57)	.938(23.83)
CFR15AKF103--	.01	"	"	"	"	.267(6.78) ±.062(1.57)	.938(23.83)
CFR15AKF123--	.012	"	"	"	"	.290(7.37) ±.062(1.57)	.938(23.83)
CFR15AKF153--	.015	"	"	"	"	.320(8.13) ±.062(1.57)	.938(23.83)
CFR15AKF183--	.018	"	"	"	"	.347(8.81) ±.062(1.57)	.938(23.83)
CFR15AKF223--	.022	"	"	"	"	.381(9.68) ±.062(1.57)	.938(23.83)
CFR15AKF273--	.027	"	"	"	"	.328(8.33) ±.062(1.57)	1.250(31.75)
CFR15AKF333--	.033	"	"	"	"	.358(9.09) ±.062(1.57)	1.250(31.75)
CFR15AKF393--	.039	"	"	65	"	.387(9.83) ±.062(1.57)	1.250(31.75)
CFR15AKF473--	.047	"	"	"	"	.421(10.69) ±.062(1.57)	1.250(31.75)
CFR15AKF563--	.056	"	"	"	"	.457(11.61) ±.062(1.57)	1.250(31.75)
CFR15AKF683--	.068	"	"	"	"	.501(12.73) ±.093(2.36)	1.250(31.75)
CFR15AKF823--	.082	"	"	"	"	.516(13.11) ±.093(2.36)	1.250(31.75)
CFR15AKF104--	.1	"	"	"	"	.571(14.50) ±.093(2.36)	1.250(31.75)
CFR15AKF124--	.12	"	"	"	"	.501(12.73) ±.093(2.36)	1.688(42.88)
CFR15AKF154--	.15	"	"	"	"	.559(14.20) ±.093(2.36)	1.688(42.88)
CFR15AKF184--	.18	"	"	"	"	.613(15.57) ±.093(2.36)	1.688(42.88)
CFR15AKF224--	.22	"	"	"	"	.677(17.20) ±.093(2.36)	1.688(42.88)
CFR15AKF274--	.27	"	"	60	"	.706(17.93) ±.093(2.36)	2.063(52.40)
CFR15AKF334--	.33	"	"	"	"	.783(19.89) ±.093(2.36)	2.063(52.40)
CFR15AKF394--	.39	"	"	"	"	.854(21.69) ±.093(2.36)	2.063(52.40)
CFR15AKF474--	.47	"	"	"	"	.939(23.85) ±.093(2.36)	2.063(52.40)
CFR15AKF564--	.56	"	"	"	"	.908(23.06) ±.093(2.36)	2.438(61.93)
CFR15AKF684--	.68	"	"	"	"	1.003(25.48) ±.093(2.36)	2.438(61.93)
CFR15AKF824--	.82	"	"	"	"	1.105(28.07) ±.093(2.36)	2.438(61.93)
CFR15AKF105--	1.00	"	"	"	"	1.223(31.06) ±.093(2.36)	2.438(61.93)

- - -

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Characteristic K, style CFR15 capacitors Ⓑ							
Type designation 1/	Capacitance (µF)	Capacitance tolerance available	Voltage dc at 105°C (volts)	Voltage at 85°C at 20 kHz (volts)	dv/dt volt/µs (volts)	D	L ±.062
CFR15AKL562--	.0056	J, K, M	800	405	600	.201(5.10) ±.047(1.19)	1.250(31.75)
CFR15AKL682--	.0068	"	"	"	"	.217(5.51) ±.047(1.19)	1.250(31.75)
CFR15AKL822--	.0082	"	"	"	"	.236(5.99) ±.047(1.19)	1.250(31.75)
CFR15AKL103--	.01	"	"	"	"	.251(6.38) ±.062(1.57)	1.250(31.75)
CFR15AKL123--	.012	"	"	"	"	.264(6.71) ±.062(1.57)	1.250(31.75)
CFR15AKL153--	.015	"	"	"	"	.294(7.47) ±.062(1.57)	1.250(31.75)
CFR15AKL183--	.018	"	"	"	"	.321(8.15) ±.062(1.57)	1.250(31.75)
CFR15AKL223--	.022	"	"	"	"	.354(8.99) ±.062(1.57)	1.250(31.75)
CFR15AKL273--	.027	"	"	"	"	.392(9.96) ±.062(1.57)	1.250(31.75)
CFR15AKL333--	.033	"	"	"	"	.433(11.00) ±.062(1.57)	1.250(31.75)
CFR15AKL393--	.039	"	"	140	"	.380(9.65) ±.062(1.57)	1.688(42.88)
CFR15AKL473--	.047	"	"	"	"	.414(10.51) ±.062(1.57)	1.688(42.88)
CFR15AKL563--	.056	"	"	"	"	.451(11.46) ±.062(1.57)	1.688(42.88)
CFR15AKL683--	.068	"	"	"	"	.501(12.73) ±.093(2.36)	1.688(42.88)
CFR15AKL823--	.082	"	"	"	"	.523(13.28) ±.093(2.36)	1.688(42.88)
CFR15AKL104--	.1	"	"	"	"	.579(14.71) ±.093(2.36)	1.688(42.88)
CFR15AKL124--	.12	"	"	85	"	.582(14.78) ±.093(2.36)	2.063(52.40)
CFR15AKL154--	.15	"	"	"	"	.652(16.56) ±.093(2.36)	2.063(52.40)
CFR15AKL184--	.18	"	"	"	"	.716(18.19) ±.093(2.36)	2.063(52.40)
CFR15AKL224--	.22	"	"	"	"	.793(20.14) ±.093(2.36)	2.063(52.40)
CFR15AKL274--	.27	"	"	"	"	.779(19.79) ±.093(2.36)	2.438(61.93)
CFR15AKL334--	.33	"	"	"	"	.863(21.42) ±.093(2.36)	2.438(61.93)
CFR15AKL394--	.39	"	"	"	"	.940(23.88) ±.093(2.36)	2.438(61.93)
CFR15AKL474--	.47	"	"	"	"	1.034(26.26) ±.093(2.36)	2.438(61.93)
CFR15AKL564--	.56	"	"	"	"	1.131(28.73) ±.093(2.36)	2.438(61.93)

1/ The complete type designation will include additional symbols to indicate capacitance tolerance and failure rate level (M, P, R, and S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Case: Nonhermetic.

Dielectric: Polypropylene, foil.

Capacitance (cap.) value: See table I.

Cap. tolerance: See table I.

Rated voltage: See table I.

Dv/dt: See table I.

Operating temperature range: -55°C to 105°C for dc operation.

Failure rate (FR) level: M, P, R or S.

Preconditioning: Not applicable.

Burn-in: In accordance with MIL-C-55514, except ac capacitors shall be +105°C +0°C, -5°C, and the applied voltage shall be 140 percent of the dc voltage specified in table I.

Dielectric withstanding voltage (DWV): In accordance with MIL-C-55514, except charge time 2 minutes maximum at 200 percent rated dc voltage.

Insulation resistance: In accordance with MIL-C-55514, except test voltage to be 100 V dc.

Dissipation factor (DF): Not more than 0.1 percent when measured in accordance with MIL-C-55514.

Low temperature conditioning and capacitance change with temperature: In accordance with MIL-C-55514.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.

ΔCap: Maximum of ±0.25 percent.

Life (at 105°C): In accordance with MIL-C-55514.

Accelerated condition: 140 percent of 105°C rated voltage.

Rated condition: 100 percent of +105°C rated voltage.

IR (at +25°C terminal to terminal): Not less than 50.0 percent of initial requirement.

ΔCap (at +25°C): Maximum of 1.0 percent.

DF (at +25°C) after life: .12 percent maximum.

AC conditioning: In accordance with MIL-C-55514. AC conditioning for qualification shall be at the rated ac voltage at 85°C and 20 kHz. For group B testing, rated ac voltage at 85°C and 20 kHz shall be run on test samples in accordance with table II herein at 12-month intervals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE II. AC conditioning test samples.

DC rated voltage (volts)	Sample size	Cap range for selection of sample 1/ (μF)
200	24	.012 to 1.0
400	24	.0068 to 1.0
600	24	.001 to 1.0
800	24	.0056 to 0.56

1/ Each test sample shall contain at least one capacitor of the highest and lowest capacitance value of each voltage group manufactured during the 12-month period.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - OS
Air Force - 17, 99
DLA - ES

User activities:
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5910-1544)

Source: https://assist.dla.mil - Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.