INCH-POUND

MIL-R-39007/8J
20 February 1990
SUPERSEDING
MIL-R-39007/8H
15 January 1987

MILITARY SPECIFICATION

RESISTOR, FIXED, WIRE-WOUND (POWER TYPE),
ESTABLISHED RELIABILITY,
STYLE RWR80

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RWR80, established reliability, power type, wire-wound, fixed resistor. These resistors are available with terminal types S and W (solderable, inductively wound), and terminal Z (weldable, noninductively wound).

1.2 Part or Identifying Number (PIN). The term Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification. Resistors covered by this specification shall be identified by a PIN which shall consist of the style designation, terminal and winding, coded resistive value, tolerance, and failure rate level. The PIN shall be derived in accordance with MIL-R-39007 and shall be in the following form:

RWR80	S	1000	F	S
Style	Terminal and winding	Coded resistance	Resistance tolerance	Failure rate level

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-R-39007 - Resistors, Fixed, Wire-Wound (Power Type), Established Reliability, General Specification for.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Laboratory Command, ATTN: SLCET-R-S, Fort Monmouth, NJ 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:24Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-39007, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 Noninductive windings. Noninductively wound resistors shall be identified by terminal designation N to indicate a solderable terminal and Z to indicate a weldable terminal.

3.3 Minimum resistance value for all terminations (N, Z, S, W). For inductively wound resistors, the minimum resistance value shall be 0.1 ohm. For resistance tolerance B (.1 percent), minimum resistance value shall be .499 ohm.

3.4 Maximum resistance value for S and W type resistors. The maximum resistance based on use of .001 inch (0.03 mm) nominal diameter wire (with a nominal resistivity of 800 ohms per circular mil foot) shall be 1,210 ohms. The maximum resistance value based on use of .008 inch (0.020 mm) nominal diameter wire (.00072 inch (0.0183 mm) absolute diameter) (not for NASA use) shall be 3,160 ohms. Resistors below 265 ohms in value shall be wound with .00175 inch (0.044 mm) or larger diameters.

3.4.1 Maximum resistance value for N and Z type resistors. For resistors having noninductive characteristic N and Z designation, the maximum resistance value shall be 640 ohms for .001 inch (0.03 mm) nominal diameter wire. For .0008 inch (0.020 mm) nominal diameter wire (not for NASA use), the maximum resistance value shall be 1,580 ohms.

3.5 Power rating. The power rating shall be 2 watts at +25°C.

3.6 Weight. The maximum weight shall be .00221 pound (1 gram).

3.7 Terminal lead types. This style resistor is available in both solderable (S and N) and weldable (W and Z) leads.

3.8 Marking. Due to size limitation, this style resistor shall be marked with the minimum marking as specified.

a. Option 1:


W80N: Partial style and terminal and winding designator.

49R9: Resistance.

FMJ: Tolerance, failure rate, JAN marking.

8140: Date code.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:24Z
Check the source to verify that this is the current version before use.

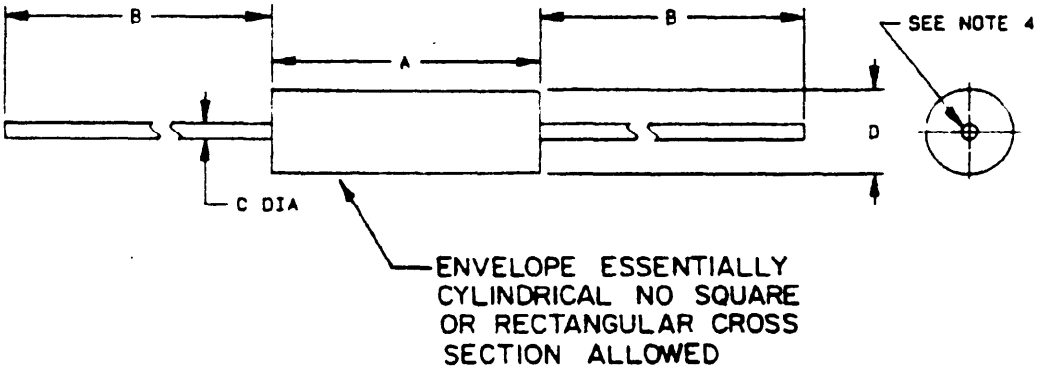

Inches	mm
.0015	0.038
.016	0.41
.0200	0.508
.031	1.79
.062	1.57
.094	2.39
.406	10.31
1.500	38.10

Standard style	Dimensions			
	A ±.031	B, min	C ±.0015	D ±.031
RWR80	.406	1.500	.0200	.094

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimension A is clean lead to clean lead.
4. Lead concentric tolerance is to be measured at the point of lead egress from the resistor body to be within .016 TIR.

FIGURE 1. Style RWR80 resistor.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:24Z
Check the source to verify that this is the currenversion before use.

b. Option 2:

RWR80N: Style and terminal and winding designator.

36R5FS: Resistance, tolerance, failure rate.

J8140X: JAN marking, date code, production lot code (any letter except J).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-39007.

4.2 Short-time overload. The duration of applied voltage shall be 5 seconds. Voltage applied shall be equivalent to 5 times rated wattage.

4.3 Dielectric withstanding voltage.

4.3.1 Atmospheric pressure. The magnitude of test voltage shall be 500 volts rms.

4.3.2 Barometric pressure (reduced). The test voltage shall be 100 volts rms.

4.4 Terminal strength. The applied force shall be 5 pounds.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39007.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-R-39007 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

6.3 MIL-R-26 substitution data. Resistors of this specification regardless of their failure rate designation are substitutes for resistors of the same resistance value, tolerance, and appropriate characteristics specified in the inactive specification MIL-R-26/5 and MIL-R-26/6, styles RW70 and RW80.

6.3.1 MIL-R-39007/4 substitution data. For replacement purposes only, use style RWR80 of MIL-R-39007/8 over the deleted RWR70 of MIL-R-39007/4.

6.4 Part or Identifying Number (PIN). The PIN should be structured in accordance with 1.2.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:24Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 17, 80, 85
DLA - ES

User activities:
Navy - CG, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-1184)

Source: https://assist.dla.mil -- Downloaded: 202640-21T16:24Z
Check the source to verify that this is the currentversion before use.