| INCH-POUND |

MIL-C-3925H
18 February 1989
SUPERSEDING
MIL-C-3925G
31 May 1984

MILITARY SPECIFICATION

# COMPRESSORS, RECIPROCATING, ROTARY AND DIAPHRAGM POWER DRIVEN, AIR, (PAINT SPRAY TYPE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers portable, single and multistage air compressors driven either by a gasoline engine or an electric motor.

1.2 Classification. The compressors will be of the following types, styles, groups, classes, receivers, drives, and sizes, as specified (see 6.2). The sizes shown are the rated capacity in cubic feet per minute (CFM) at the rated discharge pressure in pounds per square inch gauge (psig).

Type I - Reciprocating.
Type II - Rotary (asymmetrical screw).
Type III - Rotary (sliding vane).
Type IV - Diaphragm.

Style A - Electric motor driven.
Style B - Gasoline engine driven.

Group a - Single stage.
Group b - Multistage.

Class 1 - Base mounted.
Class 2 - Handtruck or wheelbarrow type mounted.
Class 3 - Skid mounted.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

Receiver A - Horizontal air receiver.
Receiver B - Vertical air receiver.
Receiver C - No receiver.

Drive 1 - Multiple V-belt.
Drive 2 - Direct connected.

Size 1 - 1.5 CFM at 40 psig.
Size 1A - 2.7 CFM at 80 psig.
Size 1B - 6 CFM at 40 psig.
Size 2 - 15 CFM at 80 psig.
Size 3 - 30 CFM at 80 psig.
Size 4 - 75 CFM at 80 psig.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standard. The following specifications and standard form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-V-173 - Varnish, Moisture and Fungus Resistant (for treatment of Communications, Electronic, and associated Equipment).

MIL-C-3600 - Compressors, Rotary, Power Driven; and Compressors, Reciprocating, Power Driven: Air and Gas (except Oxygen and Refrigerant), Packaging of.

STANDARD

MILITARY

MIL-STD-209 - Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.

(Unless otherwise indicated, copies of military specifications and standard are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA 40 CFR Part 204, Subpart B - Noise Emission Standards for Construction Equipment.

(Application for copies should be addressed to the Public Affairs Office, Environmental Protection Agency, Rockville, MD 20852; or CFR, Title 40 should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the non-Government documents which is current on the date of the solicitation (see 6.2).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME Performance Test Code (PTC) 9 - Displacement Compressors, Vacuum Pumps and Blowers.
ASME Section 8-D-1 - Rules for Construction of Pressure Vessels, Division I.

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA WD 1 - General Purpose Wiring Devices.
NEMA ICS 2 - Industrial Control Devices, Controllers and Assemblies.
NEMA ICS 6 - Enclosures for Industrial Controls and Systems.
NEMA MG 1 - Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037.)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 - National Electrical Code.

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE J534 - Lubrication Fittings.



Source: https://assist.dla.mil -- Downloaded: 202610-16T22:12Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 Description. The compressor is a portable unit, consisting primarily of sub-assemblies such as the compressing unit (compressor), prime mover (electric motor or gasoline engine), type of mounting, safety devices, electrical controls, wirings, interconnected piping, and if applicable, includes an air-cooled intercooler.

3.1.1 Standard commercial product. The compressors shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the compressors being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.2 First article. When specified (see 6.2), the contractor shall furnish a compressor for first article inspection and approval (see 4.2.1 and 6.4).

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.4 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.



Source: https://assist.dla.mil -- Downloaded: 202640-16T22:12Z
Check the source to verify that this is the current version before use.

3.5 Safety. Rotating parts and other parts subject to high temperatures that could be hazardous to operating personnel shall be fully enclosed or provided with protective guards or shields.

3.5.1 Noise level. The exterior noise level produced by the compressor unit shall not exceed the noise limits established under EPA 40 CFR Part 204, sub-part B.

3.6 Performance. The compressor unit shall be capable of delivering not less than the rated volume flow rate of air (CFM), compressed at the rated pressure (psig), under atmospheric conditions of 14.7 pounds per square inch absolute (psia) pressure, 60 degrees Fahrenheit (°F) temperature, and 36 percent relative himidity. Compressors shall be rated in accordance with ASME PTC 9.

3.7 Design and construction. Compressors shall be designed for continuous duty. All components shall be completely assembled and unitized to the required mounting to form a single unit ready for service upon hookup to field power supply or connections to field distribution piping. Air receivers (including the air-oil separator for rotary compressors) shall be designed and constructed in accordance with ASME section 8-D-1.

3.7.1 Compressor. The compressor cylinder heads shall be air-cooled. Multistage compressors shall have interstage air-cooled intercooler. An air filter-silencer shall be provided at the air intake and shall be removable for cleaning or replacement. Rotary compressors shall be provided with discharge check valve or means to prevent reverse flow of air.

3.7.2 Mounting. The required mounting shall be of sufficient size, strength and rigidity.

3.7.2.1 Base mounted. The compressor unit shall be mounted on a steel base. Electric motor driven, direct connected units (sizes 1B and smaller) without air receivers, shall be furnished with carrying handle.

3.7.2.2 Hand truck or wheelbarrow type mounted. The compressor unit shall be mounted on horizontal air receiver. The air receiver shall be supported, in turn, by two semi-pneumatic rubber tired wheels on the front end and supporting legs on the rear end, with handle bar for maneuverability. This type of mounting shall be limited to sizes 2 and smaller.

3.7.2.3 Skid mounted. The compressor unit shall be mounted on top of two parallel steel skid runners with an integrally formed, welded, or bolted base plate for mounting the components of the unit. The runners shall be upturned or beveled at each end to permit skidding or pulling of the unit. Each end of the skid shall be provided with pulling attachment which shall be designed to be used also as a lifting and tiedown device.

3.8 Controls. The compressor shall be provided with provisions for automatic start and stop control with the rated discharge pressure as the minimum setting. Motor controllers, size 2 and larger, shall be provided with



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

the required overload and short circuit protective devices in accordance with NEPA 70. Controllers shall be in accordance with NEMA ICS 2 and enclosures per ICS 6 type 1. An automatic pressure release device shall be provided to automatically unload the compressor upon shut-down and protect the unit from starting against pressure. Gasoline-engine drive units shall be equipped with an adjustable, pressure actuated, mechanical control to permit the engine to run at constant speed during unloaded periods.

3.9 Prime mover.

3.9.1 Electric motor. The electric motor shall conform to NEMA MG-1 and suitable for continuous duty. Motors shall have the electrical characteristics as specified (see 6.2). When specified (see 6.2), a high efficiency motor shall be furnished.

3.9.1.1 Wiring. All wiring and circuit devices shall conform to and be installed in accordance with NFPA No. 70.

3.9.1.2 Power cord. A hard-service, oil resistant, flexible, power cord, NEMA type S, SO, or SJ with not less than 8 feet long shall be furnished. When 3-phase motors are furnished, the cord shall be 4-conductor, 3-pole, 4-wire grounding type connectors conforming to figure 15-20P of NEMA WD 1. When single-phase motors are furnished, the cord shall be 3-conductor, connected to a 2-pole, 3-wire grounding type connector conforming to figure 5-15P of NEMA WD 1.

3.9.2 Gasoline engine. The engine shall be an air-cooled, 4-cycle gasoline engine. For sizes 2 and smaller, the engine shall be with spin recoil starting. For sizes 3 and larger, the engine shall be with electric starting. Electric start shall be a 12-volt electrical system. Commercial type, maintenance free battery, and battery holder shall be included and installed to the required type of mounting. The engine shall have a fuel tank capacity of not less than 4 hours of operation. When specified (see 6.2), a clutch shall be supplied and installed for sizes 2 and larger compressors.

3.10 Receivers. Unless otherwise specified (see 6.2), air receiver shall be the manufacturers standard size for the type of mounting and size of compressor required. The air receiver shall be furnished with drain valve and spring loaded safety valve conforming to ASME section 8-D-1.

3.10.1 Gage. A dial pressure gage with a range of twice the rated discharge pressure shall be installed directly on the compressor discharge or on the furnished air receiver.

3.11 Lubrication. Unless otherwise specified (see 6.2), means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high pressure lubricating equipment, 1,000 pound-force per square inch (psi) or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

3.12 Treatment and painting. Unless otherwise specified (see 6.2), the compressor shall be treated and painted in accordance with the manufacturer's standard practice. All surfaces of the compressor other than corrosion-resisting steel shall be protected against corrosion and present a neat appearance.

3.13 Fungus resistance. When specified (see 6.2), electrical components and circuit elements, including terminal and circuit connections, shall be coated with varnish conforming to MIL-V-173, except that:

a. Components and elements inherently inert to fungi or in hermetically sealed enclosures need not be coated.
b. Current-carrying contact surfaces, such as relay contact points, shall not be coated.

3.14 Identification marking. Identification shall be permanently and legibly marked directly on the compressor or on a corrosion-resisting metal plate securely attached to the compressor at the source of manufacture. Identification shall include the manufacturer's model and serial number, name and trademark to be readily identifiable to the manufacturer.

3.14.1 Rotation arrows. Rotation arrows shall be cast-in or attached near the drive end of the compressor. If attached, rotation arrow and attachment pin shall be of corrosion resisting material.

3.15 Instruction plates. The compressor shall be equipped with instruction plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the equipment with nonferrous screws or bolts of not less than 1/8-inch diameter.

3.16 Lifting and tiedown attachments. When specified (see 6.2), the compressor shall be equipped with lifting and tiedown attachments. Lifting and tiedown attachments shall conform to type II or type III of MIL-STD-209. A nonferrous transportation plate shall be provided and mechanically attached to the unit. Transportation plates shall be inscribed with a diagram showing the lifting attachments and lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the item furnished showing the center of gravity shall be provided on the transportation plate. Tiedown attachments may be identified by stenciling or other suitable marking. Tiedown marking shall clearly indicate that the attachments are intended for the tiedown of the unit on the carrier when shipped.

3.17 Workmanship.

3.17.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

3.17.2 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.17.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

3.17.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

3.17.5 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on compressor when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.3, the tests of 4.4, and packaging inspection of 4.5.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.3, the tests of 4.4.4, and the packaging inspection of 4.5.

4.3 Examination. Each compressor shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.4 Tests.

4.4.1 Test Conditions. Prior to the tests specified herein which require the compressors to be operated, the units shall be serviced with oils and greases recommended by the manufacturer for use in ambient temperature at the test location. Batteries used for test purposes shall be supplied by the manufacturer in lieu of the batteries to be shipped with the unit.

4.4.2 Performance test. The compressor shall be tested to determine capacity and power consumption in accordance with the rules, procedures, and instrumentation specified in the ASME PTC-9. The duration of the test shall be sufficient to record all data required under Report of Test of PTC-9, but in no case shall the test duration be less than 1 hour. Failure to meet the performance requirements shall be cause for rejection.

4.4.3 Functional test. The air compressor shall be operated continuously for a period of not less than 4 hours for sizes 2 and larger and 2 hours for sizes 1 and smaller, during which time a log shall be maintained for the capacity, discharge pressure, and operating speed. For a 1-hour period during the test, the air discharge valve shall be alternately opened and closed so



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

as to operate the compressor through the complete loading cycle (from zero to full rated capacity and back to zero capacity) not less than once every 5 minutes. The compressor shall operate at zero capacity for not more than 1 minute between cycles. Cycling operation for gasoline engine driven units shall be observed to determine if, when the air discharge valve is closed, the engine speed reduces from full-rated-capacity speed to an idle speed not greater than that recommended by the engine manufacturer. Failure of the compressor to meet the performance requirements or malfunction or failure of any parts, components, or controls shall be cause for rejection.

4.4.4 Operational test. Each compressor shall be operated for a period of not less than 15 minutes to verify satisfactory operation of the compressor and all controls. During the test, all necessary adjustments in controls shall be made as required to insure that performance requirements relating to compressor output and regulation and engine speeds will be met. Failure to meet the requirements shall be cause for rejection.

4.5 Packaging inspection. The preservation, packing, and marking shall be inspected to verify conformance to the requirement of section 5.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be in accordance with the requirements of MIL-C-3600 with the level of preservation and the level of packing as specified (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The compressors are intended as portable sources of compressed air for paint spray outfits.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type, style, group, class, receiver, drive and size (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article is required (see 3.2).
e. Electric motor electrical characteristic specified (see 3.9.1).
f. When high efficiency motor is required (see 3.9.1).
g. When clutch is required (see 3.9.2).
h. Size of air receiver if not manufacturers standard (see 3.10).
i. When lubrication is other than manufacturers standard (see 3.11).
j. When treatment and painting is other than manufacturers standard (see 3.12).
k. When fungus resistance is required (see 3.13).
l. When lifting and tiedown attachment is required (see 3.16).
m. Level of preservation and level of packing required (see 5.1).




Source: https://assist.dla.mil -- Downloaded: 202640-16T22:12Z
Check the source to verify that this is the current version before use.

6.3 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data shall be delivered by the contractor in accordance with the contract or purchase order requirements.

6.4 First article. When a first article inspection is required (see 3.2 and 6.2), the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

6.5 Part or identifying number (PIN). The compressor unit will be identified by a PIN. This PIN is intended for cataloging and shall be designated as follows:

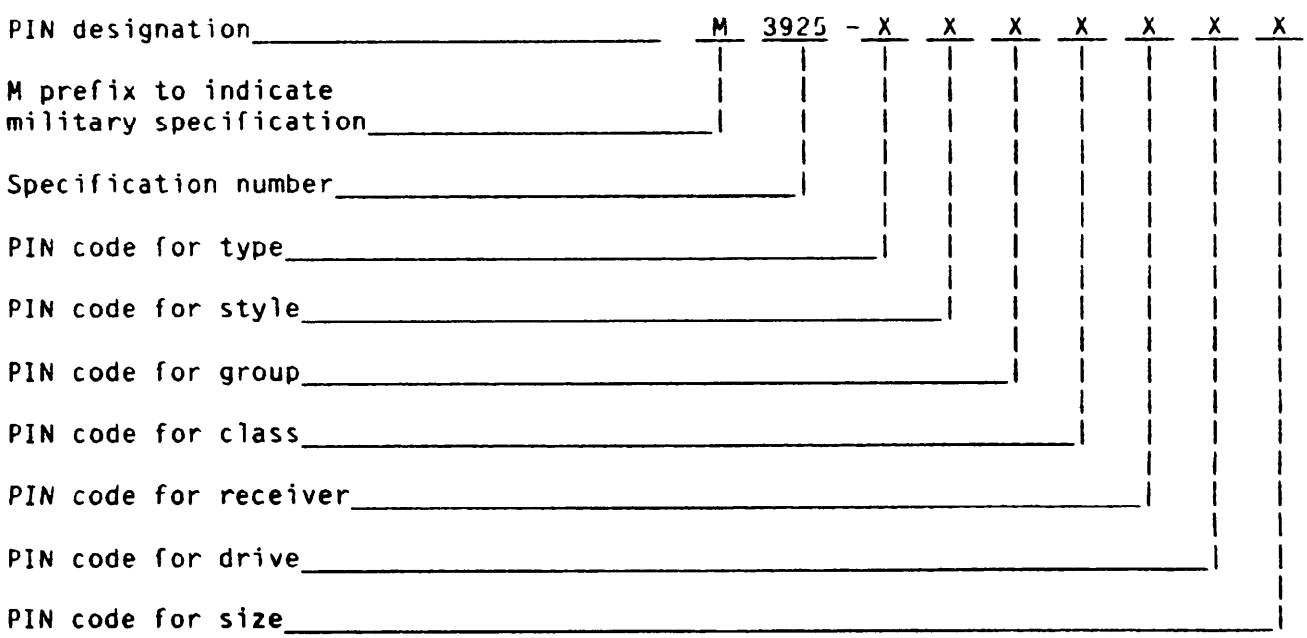


6.5.1 Cataloging data. For cataloging data purposes, PIN code number are assigned as follows:

a. PIN code for type.
   1 = Type I.
   2 = Type II.
   3 = Type III.
   4 = Type IV.



Source: https://assist.dla.mil -- Downloaded: 202640-16T22:12Z
Check the source to verify that this is the current version before use.

b. PIN code for style.
A = Style A.
B = Style B.

c. PIN code for group.
a = Group a.
b = Group b.

d. PIN code for class.
1 = Class 1.
2 = Class 2.
3 = Class 3.

e. PIN code for receiver.
A = Received A.
B = Received B.
C = Received C.

f. PIN code for drive.
1 = Drive 1.
2 = Drive 2.

g. PIN code for size.
A = Size 1.
B = Size 1A.
C = Size 1B.
D = Size 2.
E = Size 3.
F = Size 4.

6.5.2 Example of PIN. Requirements: Electric motor driven air reciprocating compressor, single stage, skid mounted with vertical air receiver, multiple V-belt drive, 30 CFM at 80 psig.

PIN designation: M 3925 - 1Aa3B1A

6.6 Cross reference of classification. The classification of the compressor unit in this document differs from the superseded specification in the following respect:

| MIL-C-3925G | MIL-C-3925H |
|---|---|
| Type I (Reciprocating) | Type I (Reciprocating) |
| Type II (Rotary) | Type II (Rotary - Asymmetrical Screw) |
| Type III (Diaphragm) | Type III (Rotary - Sliding Vane) |
| | Type IV (Diaphragm) |
| Style A | Style A |
| Style B | Style B |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

| MIL-C-3925G | MIL-C-3925H |
|---|---|
| Group A | Group a |
| Group B | Group b |
| Not designated | Class 1 |
| Not designated | Class 2 |
| Not designated | Class 3 |
| Not designated | Receiver A |
| Not designated | Receiver B |
| Not designated | Receiver C |
| Not designated | Drive 1 |
| Not designated | Drive 2 |
| Size 1 | Size 1 |
| Size 1A | Size 1A |
| Size 1B | Size 1B |
| Size 2 | Size 2 |
| Size 3 | Size 3 |
| Size 4 | Size 4 |

6.7 Subject term (keyword) listing.

Axial screw
Base mounted
Drive, direct connected
Drive, multiple V-belt
Skid mounted
Sliding vane
Wheelbarrow mounted

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Navy - YD
Air Force - 99

Review activities:
Army - CE
Air Force - 84
DLA - CS

User activities:
Navy - MC

Preparing activity:
Navy - YD

(Project 4310-0174)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

Commanding Officer (Code 156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Code 156
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:12Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-3925H | MILITARY SPECIFICATION - COMPRESSORS, RECIPROCATING, ROTARY AND DIAPHRAGM POWER DRIVEN, AIR, (PAINT SPRAY TYPE) |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:12Z
Check the source to verify that this is the current version before use.