
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CONTACT) (ROUND, 4 HOLE) (MILLIMETER)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.

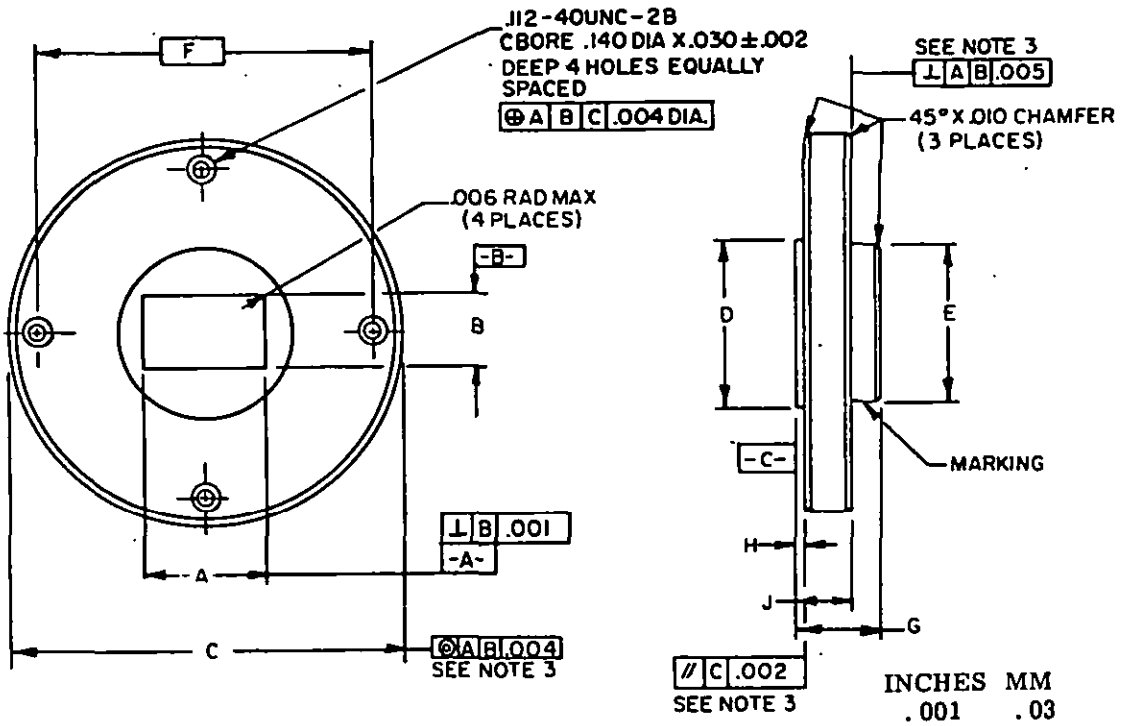

INCHES	MM
.001	.03
.002	.05
.004	.10
.005	.13
.006	.15
.010	.25
.030	.76
.112	2.84
.140	3.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch ≈ 25.4 mm.
3. This requirement is not applicable to dash numbers 001, 002 or 003.
4. See table I for lettered dimensions.

FIGURE 1. Flange.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

TABLE I. Flange dimensions.

Part number M3922/67-			Part number M3922/67-			Dimensions 1/								
Dash no. 2/	Used with Waveguide	Used with Mating flange	Dash no. 3/	Used with Waveguide	Used with Mating flange	A +.002 (.05) -.000	B +.002 (.05) -.000	C +.000 -.002 (.05)	D ±.005 (.13)	E ±.005 (.13)	F BSC.	G ±.005 (.13)	H ±.005 (.13)	J
001	M85/3-010 (RG-97/U), 011, 012 (RG-272/U)	M3922/67-001	---	---	---	.309 (7.85)	.197 (5.00)	1.125 (28.58)	.406 (10.31)	.406 (10.31)	.9375 (23.81)	.268 (6.81)	.042 (1.07)	.156 (3.96) ±.005 (.13)
002	M85/3-017 (RG-98/U), 018, 019 (RG-273/U)	M3922/67-002	---	---	---	.233 (5.92)	.159 (4.04)	.750 (19.05)	.328 (8.33)	.328 (8.33)	.5625 (14.29)	.268 (6.81)	.030 (.76)	.156 (3.96) ±.005 (.13)
003	M85/3-020 (RG-99/U), 021, 022 (RG-274/U)	M3922/67-003	---	---	---	.207 (5.26)	.146 (3.71)	.750 (19.05)	.296 (7.52)	.296 (7.52)	.5625 (14.29)	.268 (6.81)	.030 (.76)	.156 (3.96) ±.005 (.13)
004	M85/1-100, 102 (RG-53/U), 106 (RG-55/U)	M3922/67-004	011	M85/1-103 (RG-121/U), 104	M3922/67-011	.502 (12.75)	.252 (6.40)	1.125 (28.58)	.625 (15.88)	.625 (15.88)	.9375 (23.81)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
005	M85/3-006 (RG-96/U), 007, 008 (RG-271/U)	M3922/67-005	012	M85/3-009	M3922/67-012	.362 (9.19)	.222 (5.64)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	.9375 (23.81)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
006	M85/3-010 (RG-97/U), 011, 012 (RG-272/U)	M3922/67-006	013	M85/3-013	M3922/67-013	.306 (7.77)	.194 (4.93)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	.9375 (23.81)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
007	M85/3-014, 015, 016 (RG-358/U)	M3922/67-007	---	---	---	.270 (6.86)	.176 (4.47)	1.125 (28.58)	.500 (12.70)	.468 (11.89)	.9375 (23.81)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
008	M85/3-017 (RG-98/U), 018, 019 (RG-273/U)	M3922/67-008	---	---	---	.230 (5.84)	.156 (3.96)	.750 (19.05)	.375 (9.53)	.312 (7.92)	.5625 (14.29)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
009	M85/3-020 (RG-99/U), 021, 022 (RG-274/U)	M3922/67-009	---	---	---	.204 (5.18)	.143 (3.63)	.750 (19.05)	.375 (9.53)	.312 (7.92)	.5625 (14.29)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)
010	M85/3-023, 024, 025 (RG-359/U)	M3922/67-010	---	---	---	.182 (4.62)	.132 (3.35)	.750 (19.05)	.375 (9.53)	.312 (7.92)	.5625 (14.29)	.250 (6.35)	.032 (.81)	.160 (4.06) -.005(.13) -.002(.05)

1/ Metric equivalents are in parentheses.
2/ Material shall be copper alloy.
3/ Material shall be aluminum alloy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

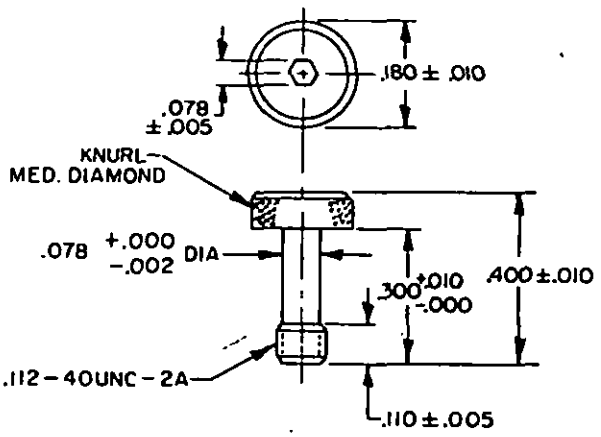

INCHES	MM
.002	.05
.005	.13
.010	.25
.078	1.98
.110	2.79
.112	2.84
.180	4.57
.300	7.62
.400	10.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Socket-head cap screw.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: Flange: See table I.
Cap screw: Corrosion resistant steel in accordance with QQ-S-763, type 302 or 304.

Marking: See figure 1.
Part number: M3922/67-(dash number from table I).


Material supplied with flange: Four socket-head cap screws as specified in figure 2.

ENGINEERING INFORMATION:

Finished flange and waveguide assembly (dash numbers 004 through 013 only). See figure 3 and table II.

Cross reference and supersession data, frequency range, and return loss data: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

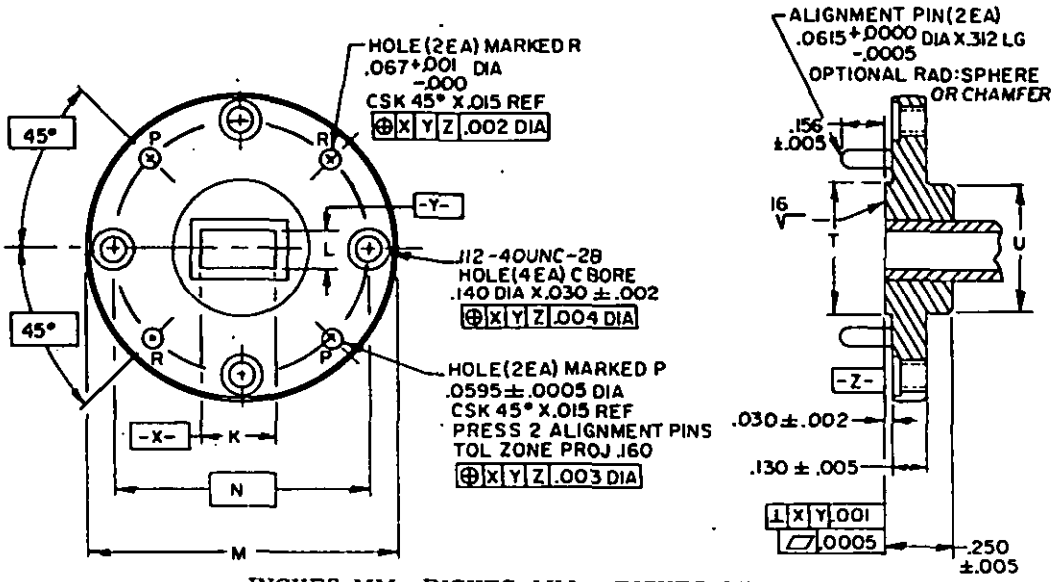

INCHES	MM	INCHES	MM	INCHES	MM
.0005	.01	.015	.38	.140	3.56
.001	.03	.030	.76	.156	3.96
.002	.05	.0595	1.51	.160	4.06
.003	.08	.0615	1.56	.250	6.35
.004	.10	.067	1.70	.312	7.92
.005	.13	.112	2.84		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. See table II for lettered dimensions.

FIGURE 3. Finished flange and waveguide assembly.

TABLE II. Finished flange and waveguide assembly dimensions (004 thru 013 only).

Part number M3922/67-	Dimensions 1/ K ±.0015 (.04)	L ±.0015 (.04)	M +.000 -.002 (.05)	N BSC.	T ±.005 (.13)	U ±.005 (.13)
004, 011	.4200 (10.67)	.1700 (4.32)	1.125 (28.58)	.9375 (23.81)	.625 (15.88)	.625 (15.88)
005, 012	.2800 (7.11)	.1400 (3.56)	1.125 (28.58)	.9375 (23.81)	.500 (12.70)	.468 (11.89)
006, 013	.2240 (5.69)	.1120 (2.84)	1.125 (28.58)	.9375 (23.81)	.500 (12.70)	.468 (11.89)
007	.1880 (4.78)	.0940 (2.39)	1.125 (28.58)	.9375 (23.81)	.500 (12.70)	.468 (11.89)
008	.1480 (3.76)	.0740 (1.88)	.750 (19.05)	.5625 (14.29)	.375 (9.53)	.312 (7.92)
009	.1220 (3.10)	.0610 (1.55)	.750 (19.05)	.5625 (14.29)	.375 (9.53)	.312 (7.92)
010	.1000 (2.54)	.0500 (1.27)	.750 (19.05)	.5625 (14.29)	.375 (9.53)	.312 (7.92)

1/ Metric equivalents are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

TABLE III. Suggested frequency range, cross reference, supersession data, and return loss data.

Part number M3922/67-	AN nomenclature	Frequency range	Worst case return loss (dB)	
			Lowest frequency	Highest frequency
		GHz		
001	UG-383/U	33.0 - 50.0	-29.6	-36.3
002	UG-385/U	50.0 - 75.0	-22.4	-28.9
003	UG-387/U	60.0 - 90.0	-18.8	-25.4
004	---	18.0 - 26.5	-55.1	-61.2
005	---	26.5 - 40.0	-48.7	-54.2
006 1/	---	33.0 - 50.0	-43.7	-50.3
007 2/	---	40.0 - 60.0	-41.4	-47.4
008	---	50.0 - 75.0	-36.5	-43.0
009	---	60.0 - 90.0	-32.9	-39.5
010	---	75.0 - 110.0	-30.1	-36.1
011	---	18.0 - 26.5	-55.1	-61.2
012	---	26.5 - 40.0	-48.7	-54.2
013	---	33.0 - 50.0	-43.7	-50.3

1/ Supersedes M3922/65-001.
2/ Supersedes M3922/65-002.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, MU, SG
Navy - OS
Air Force - 11, 80
DSA - ES

User activities:
Army - ME
Navy - AS, MC, CG
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0813)

U.S. GOVERNMENT PRINTING OFFICE: 1976- 603 766:2577

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONICS SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 3111

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16122:08Z
Check the source to verify that this is the current version before use.