
MILITARY SPECIFICATION SHEET


FLANGES, WAVEGUIDE, REDUCED HEIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the flanges described herein shall consist of this specification sheet and the latest issue of MIL-F-3922.

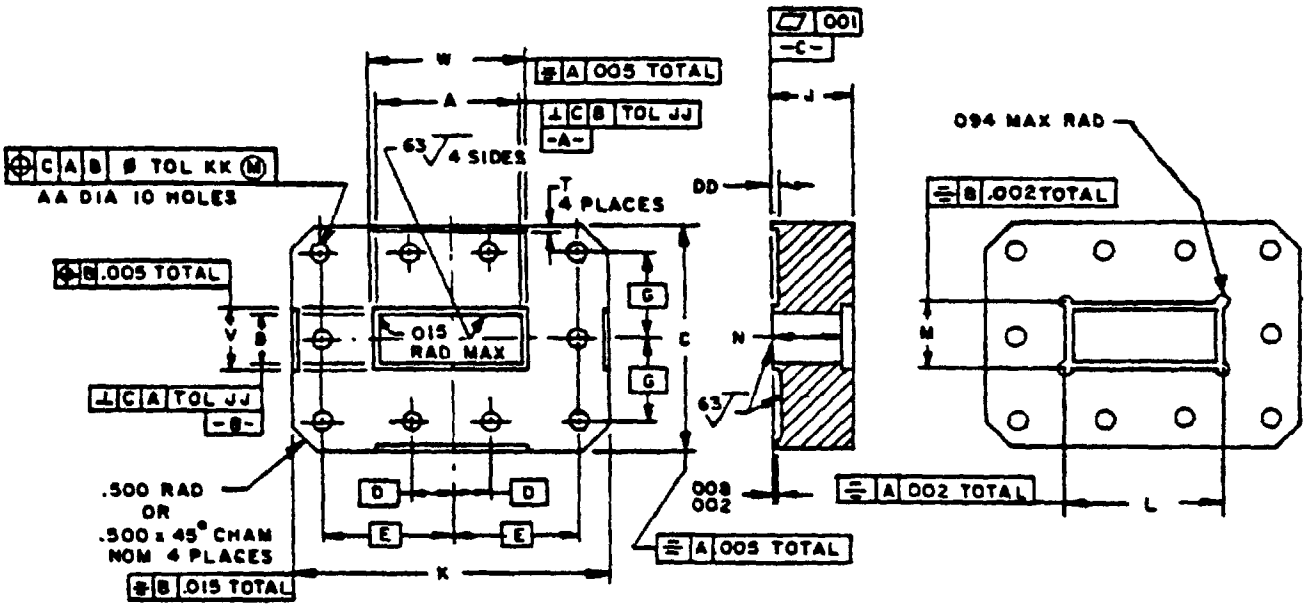

Configuration 1. Contact flange, socket mounted (part numbers 01 thru 04).




OPTIONAL CORNER CONFIGURATION

FIGURE 1. Flanges.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

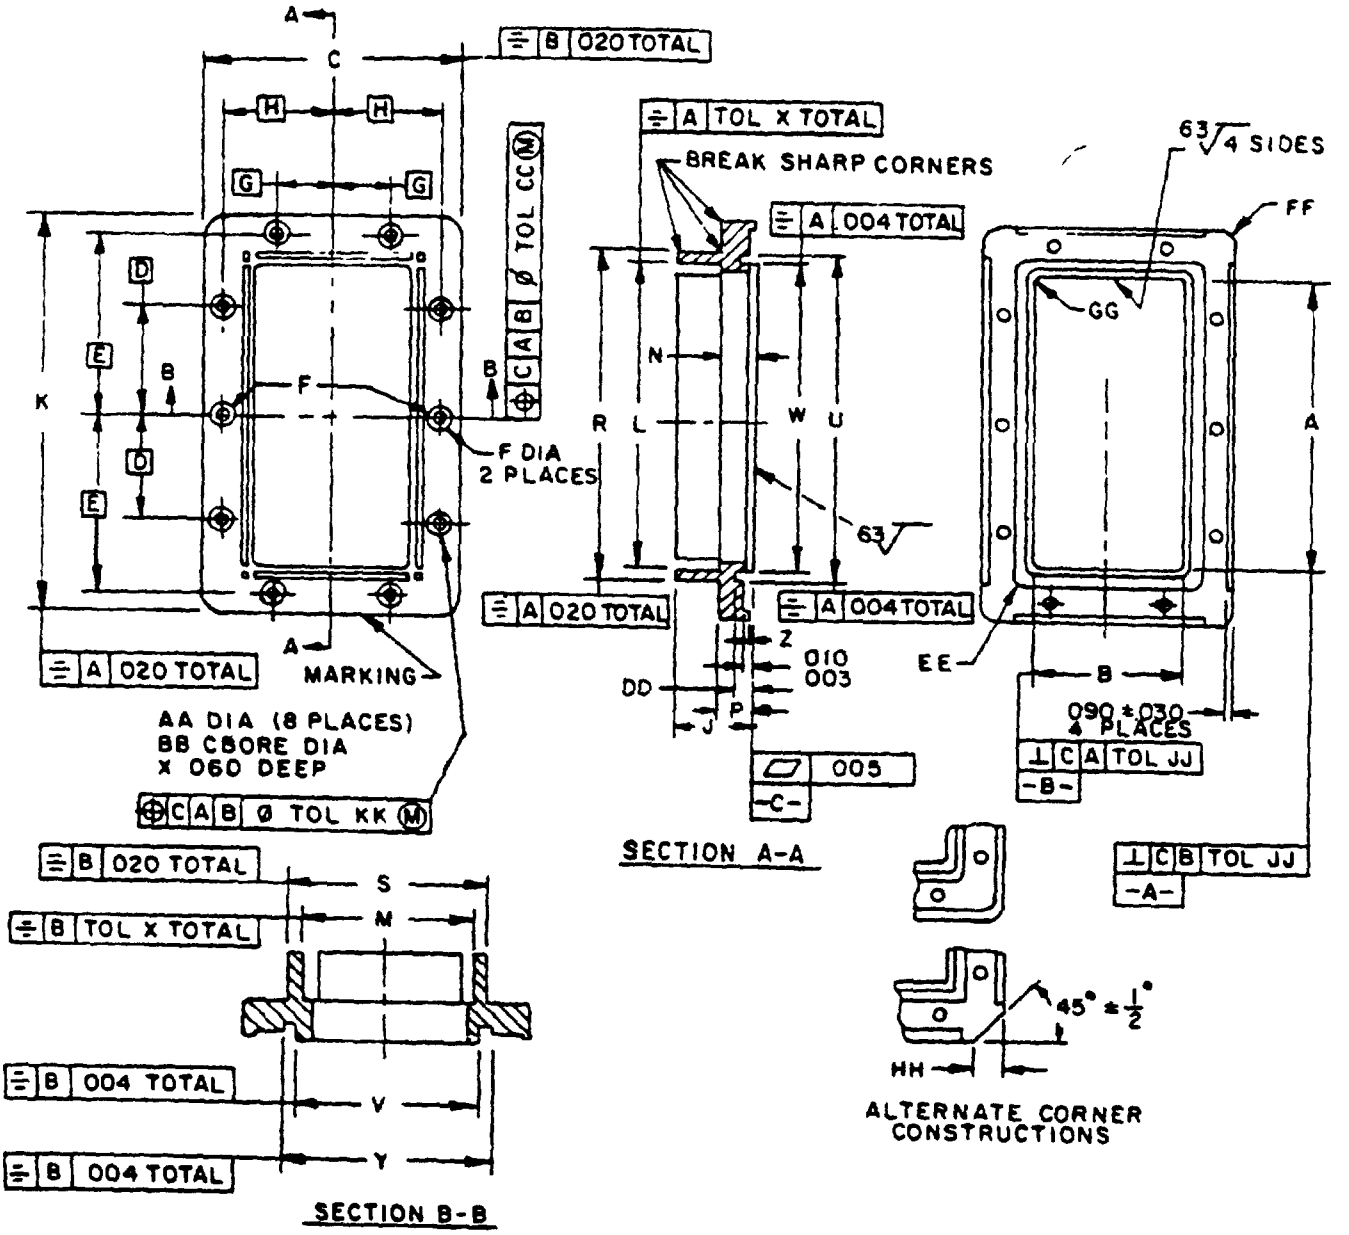

Configuration 2. Contact flange, butt mounted (part numbers 05 thru 08).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 202640-16T22:11Z
Check the source to verify that this is the current version before use.

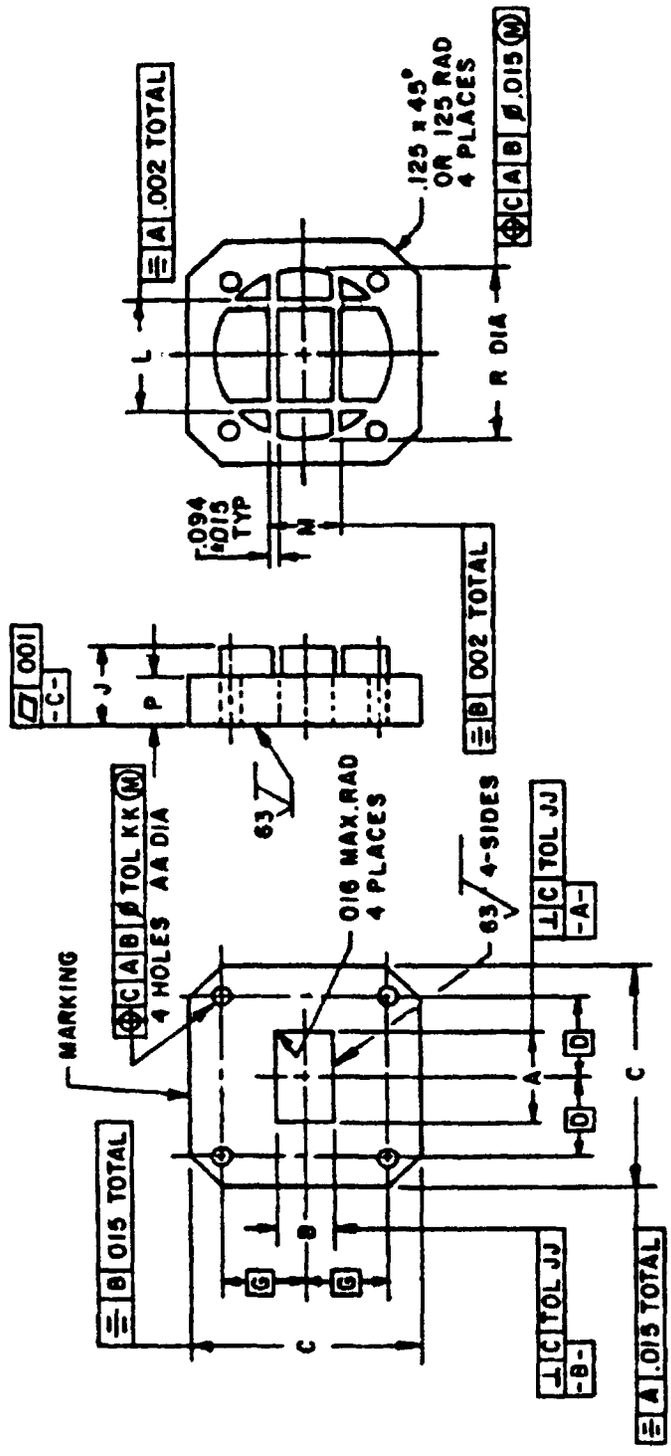

Configuration 3. Cover flange, butt mounted (part number 09).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 202640-16T22:11Z
Check the source to verify that this is the currentversion before use.

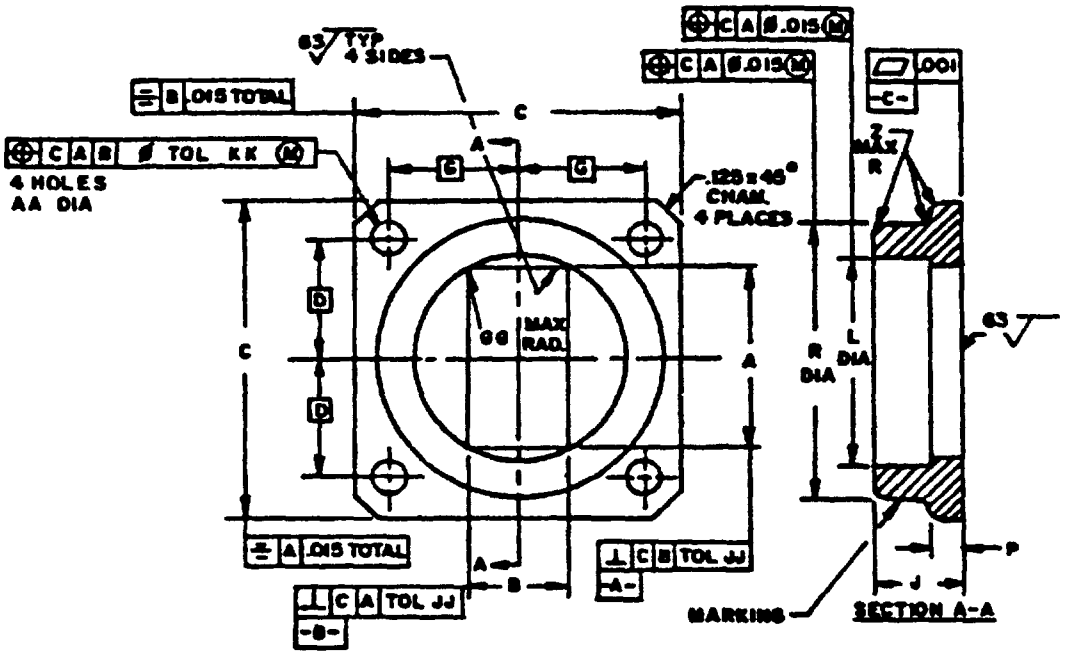

Configuration 4. Cover flange, sleeve mounted (part number 10).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

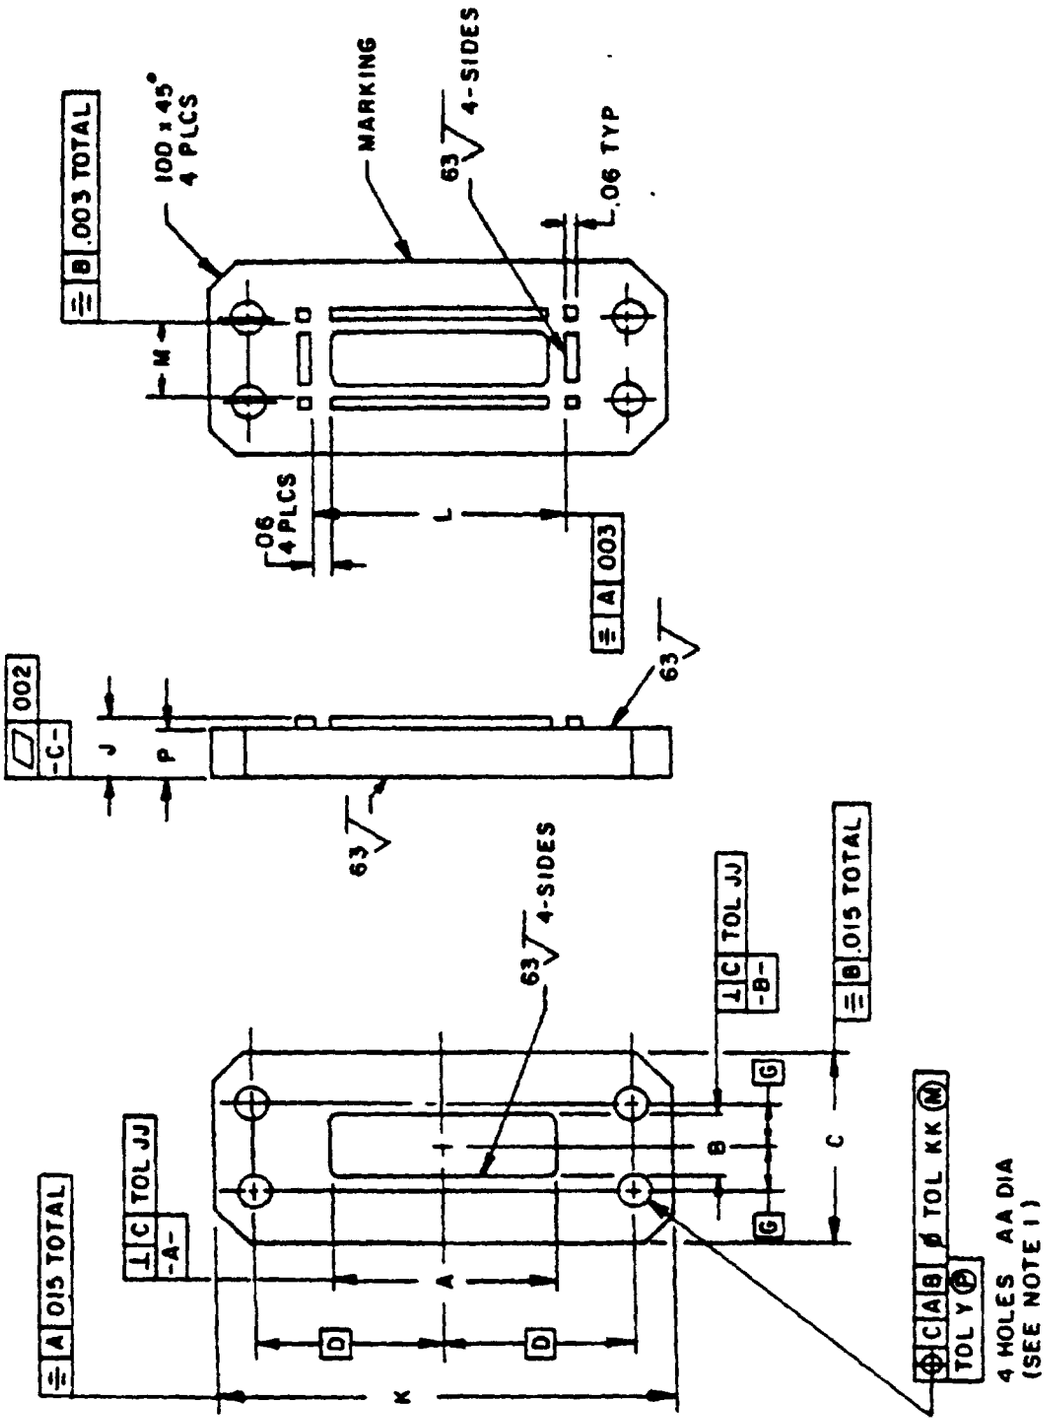

Configuration 5. Cover flange, butt mounted (part numbers 11, 12, 13, and 14).

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

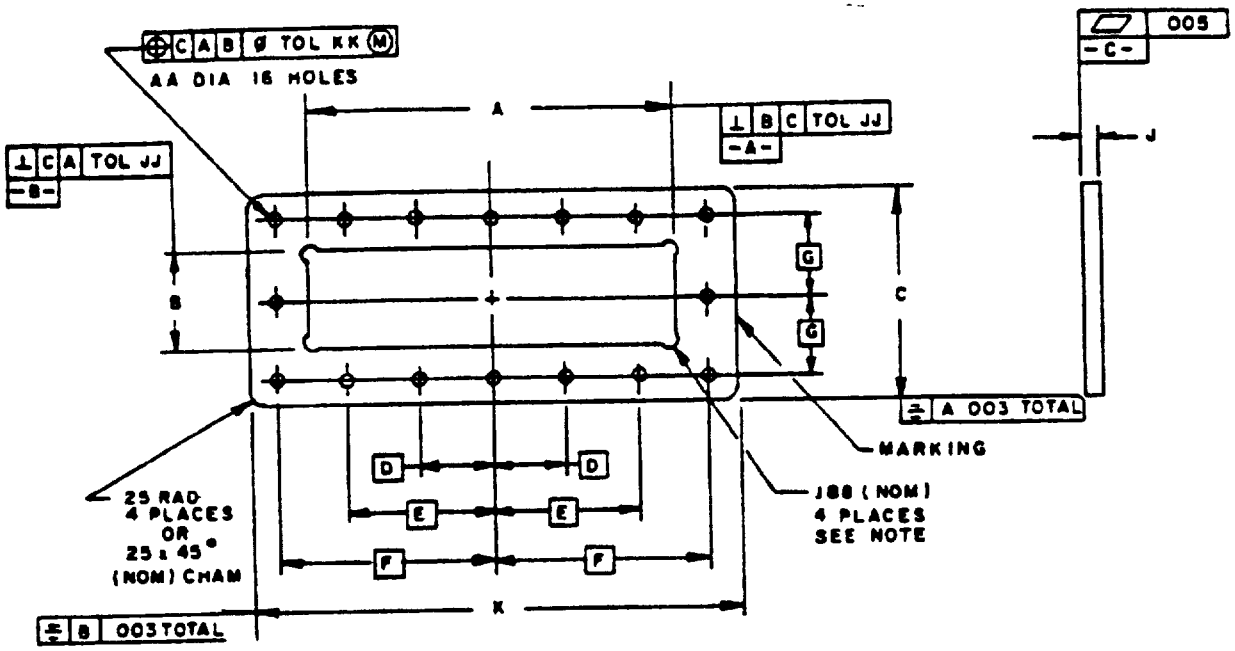


NOTE: Corner radii are equal to the waveguide wall thickness.

Configuration 6. Contact flange, sleeve mounted (part numbers 15 and 16).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

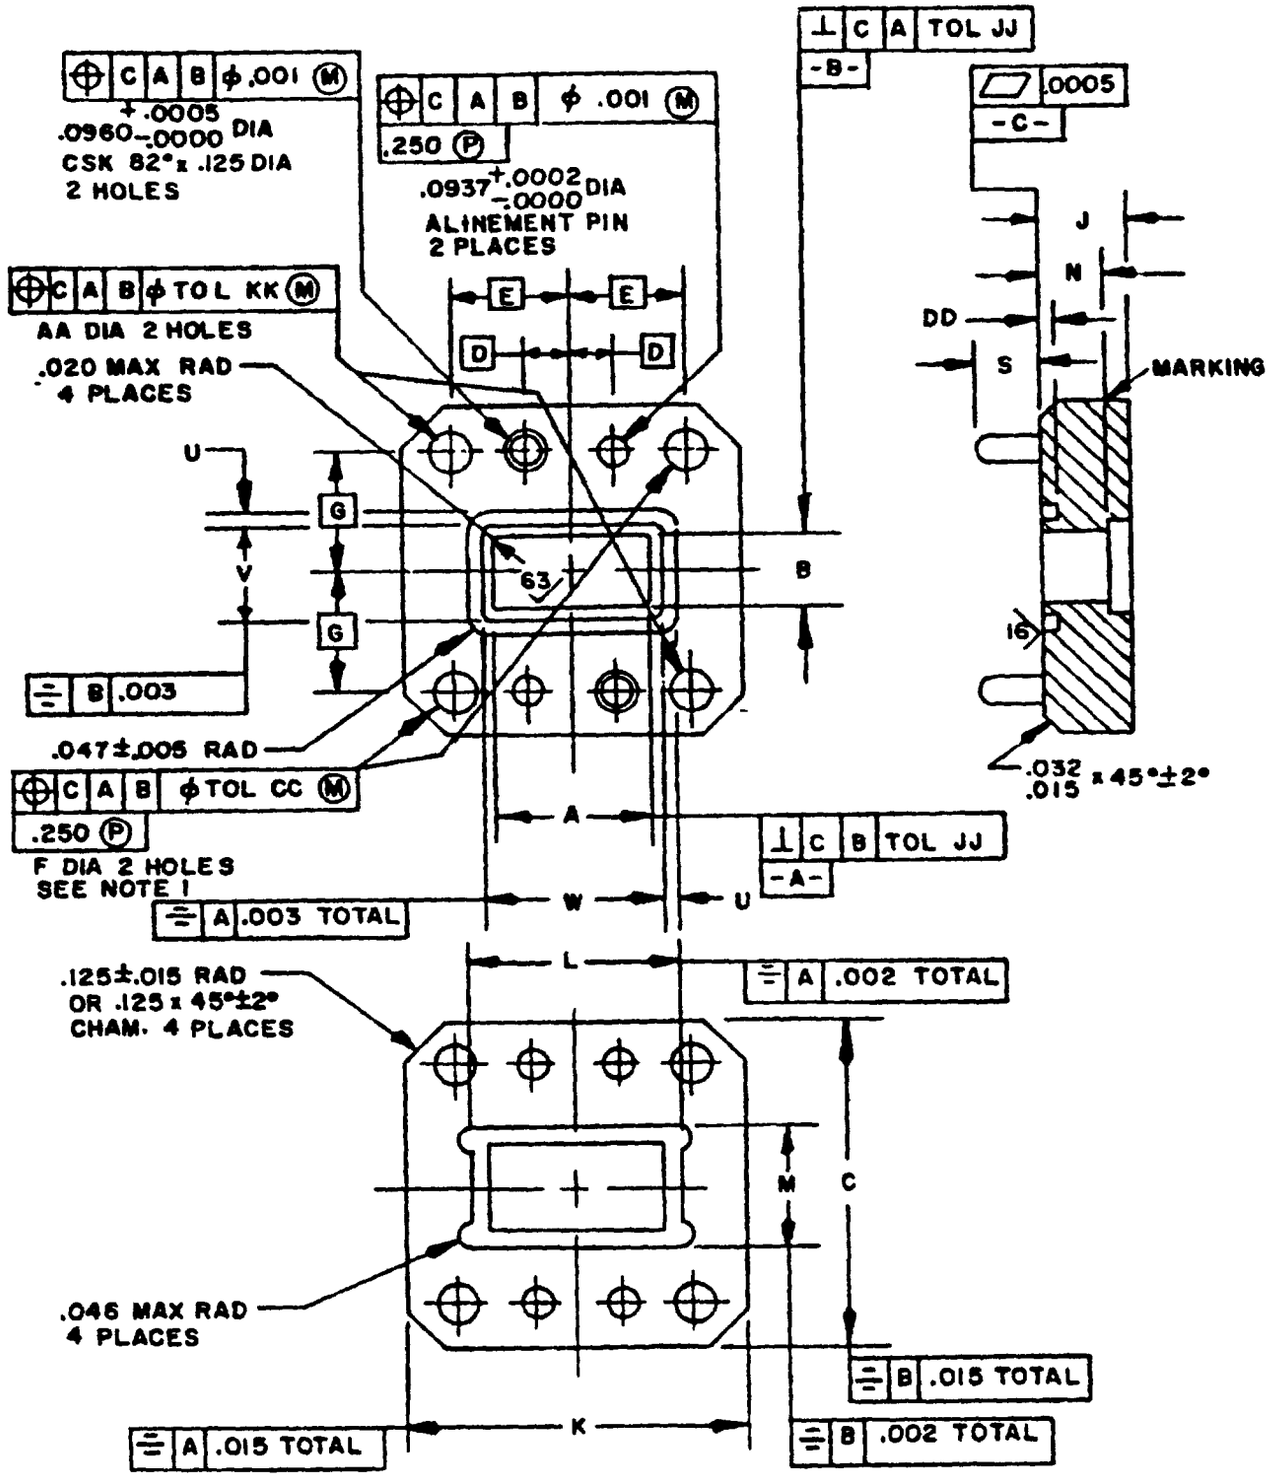

Configuration 7. Gasket flange, socket mounted (part number 17).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

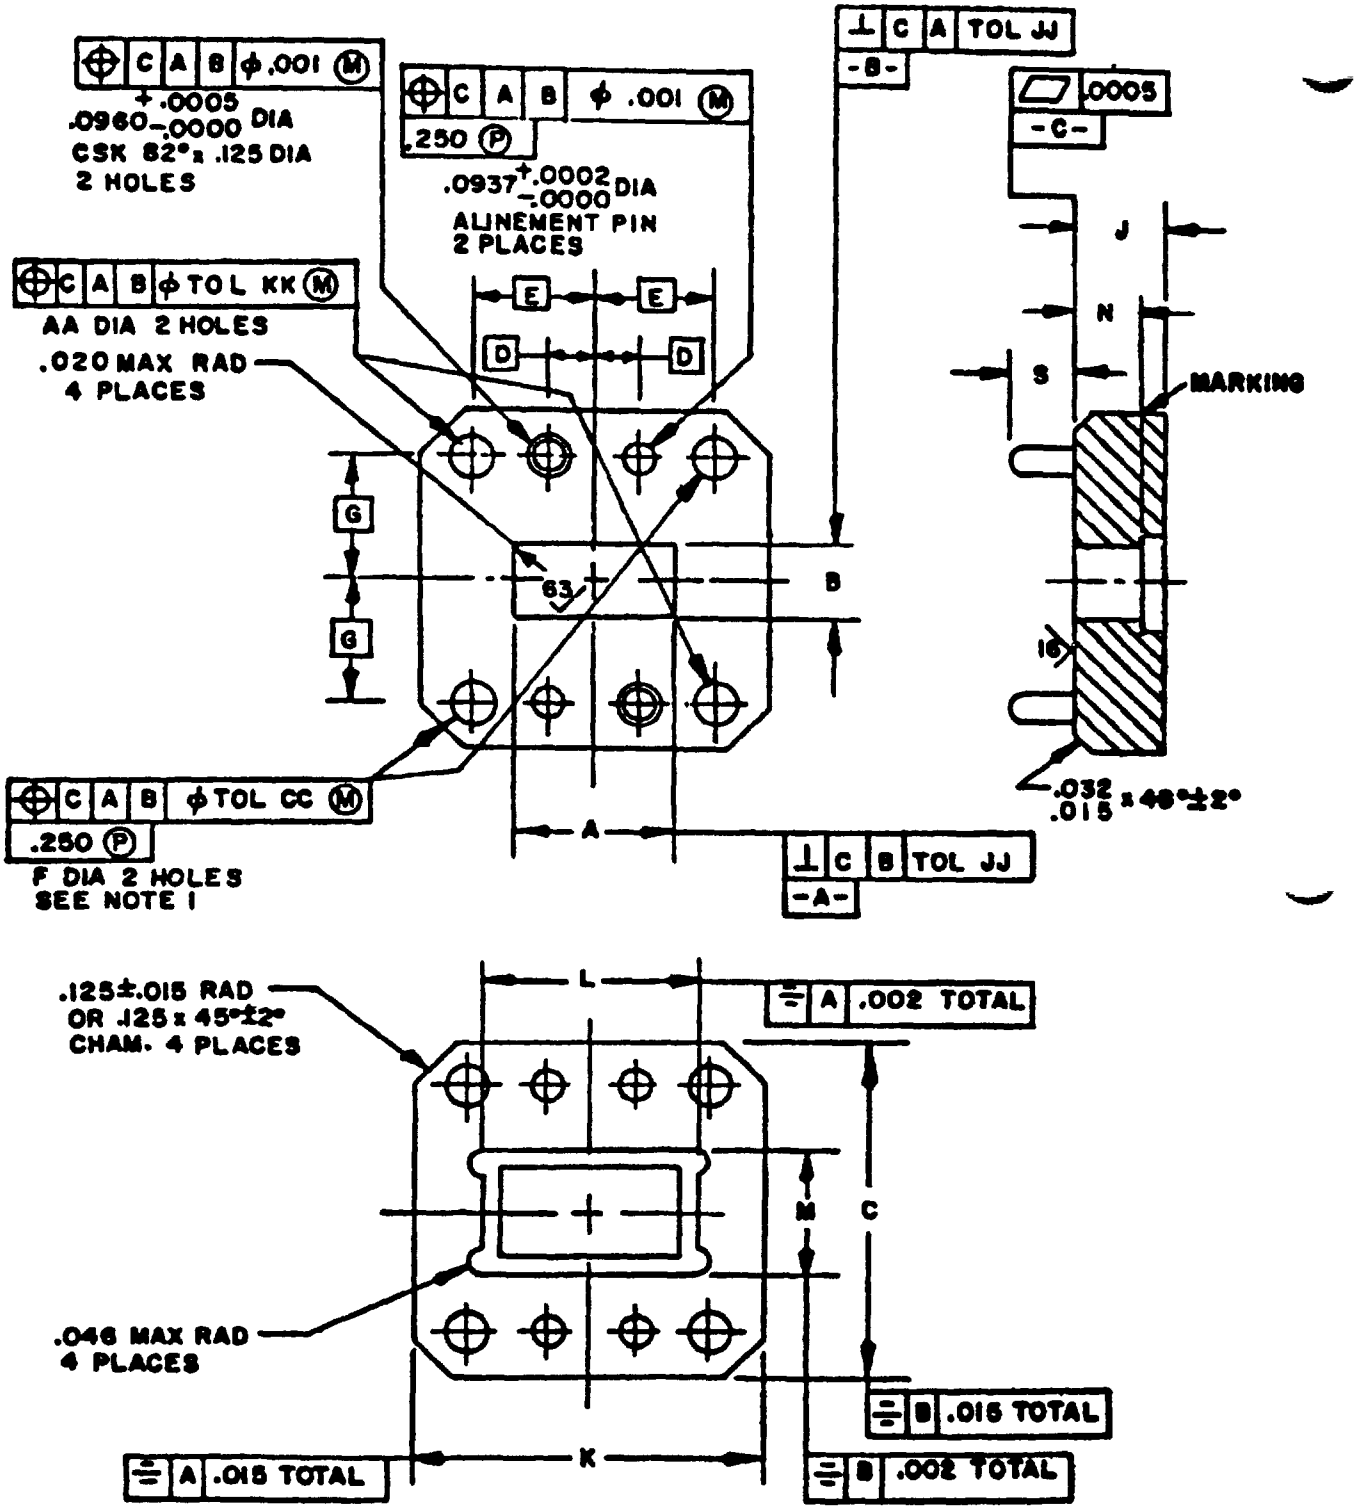

Configuration 8. Cover flange, socket mounted (part number 18).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 202640-16T22:11Z
Check the source to verify that this is the current version before use.

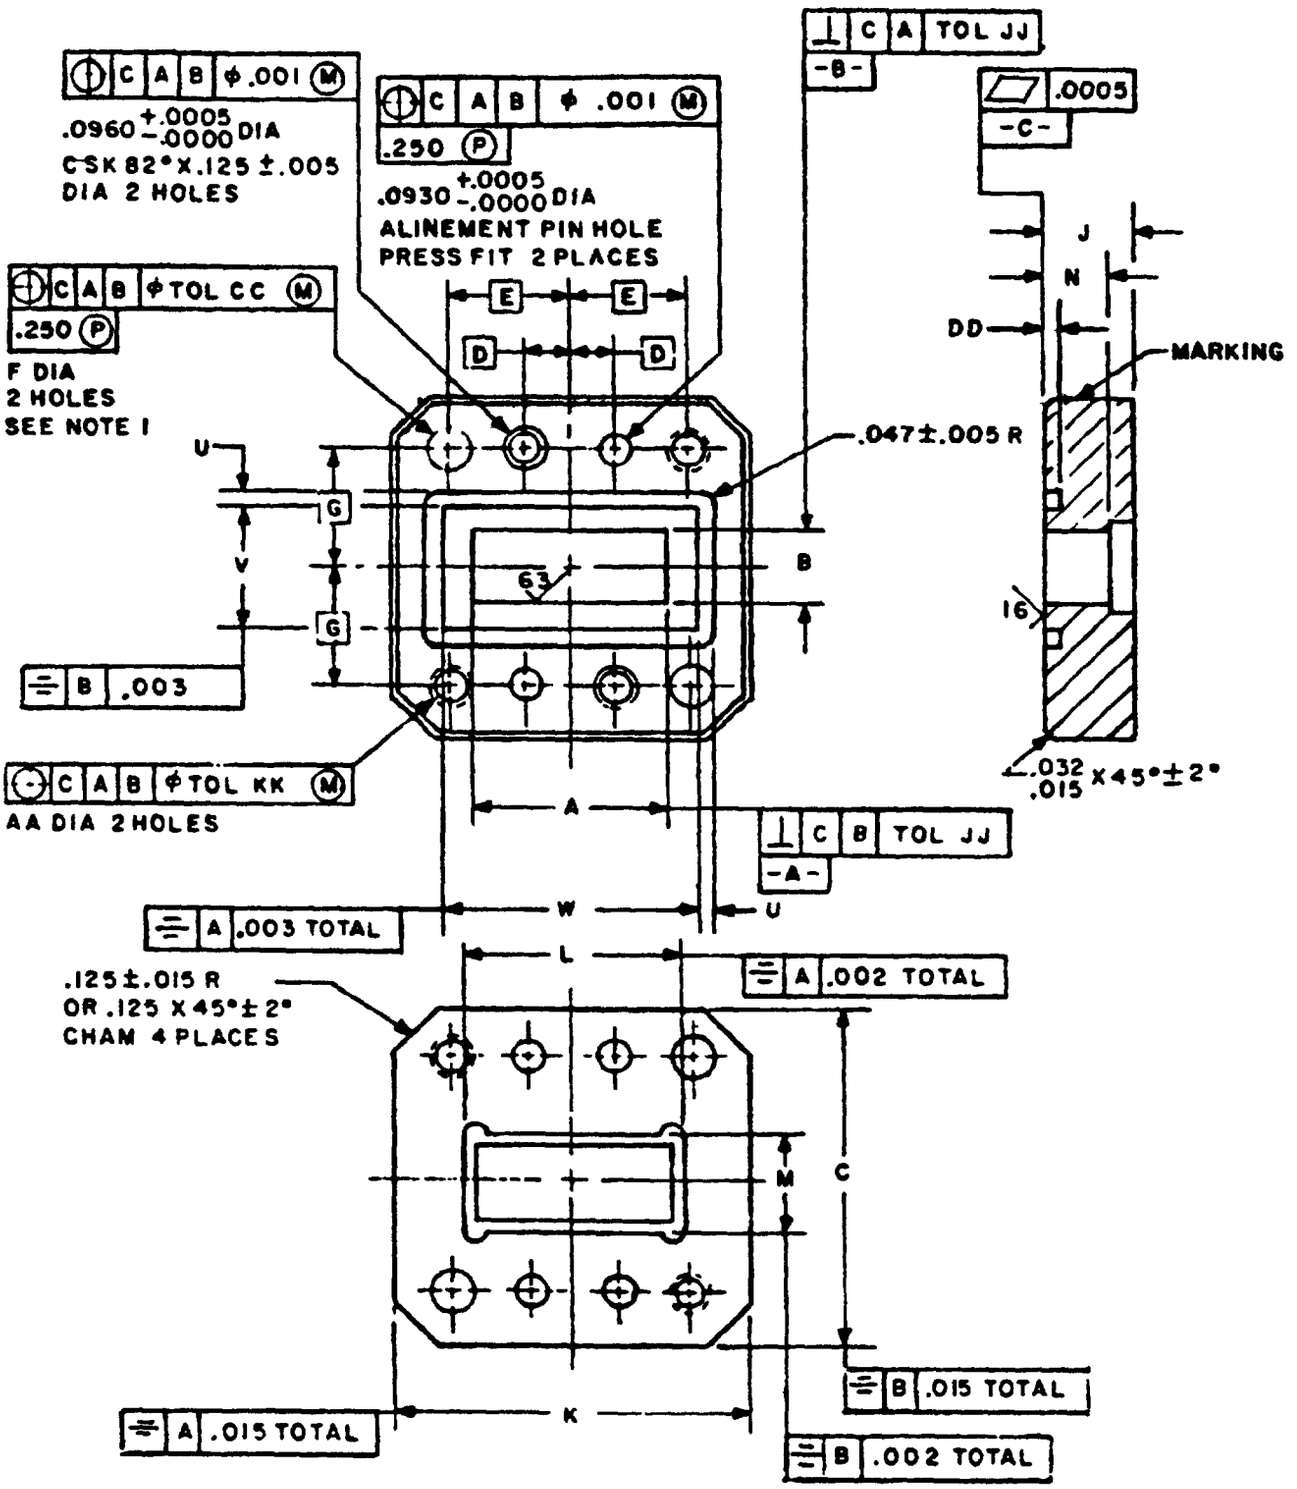

Configuration 9. Gasket flanges, socket mounted (part number 19 and 20).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

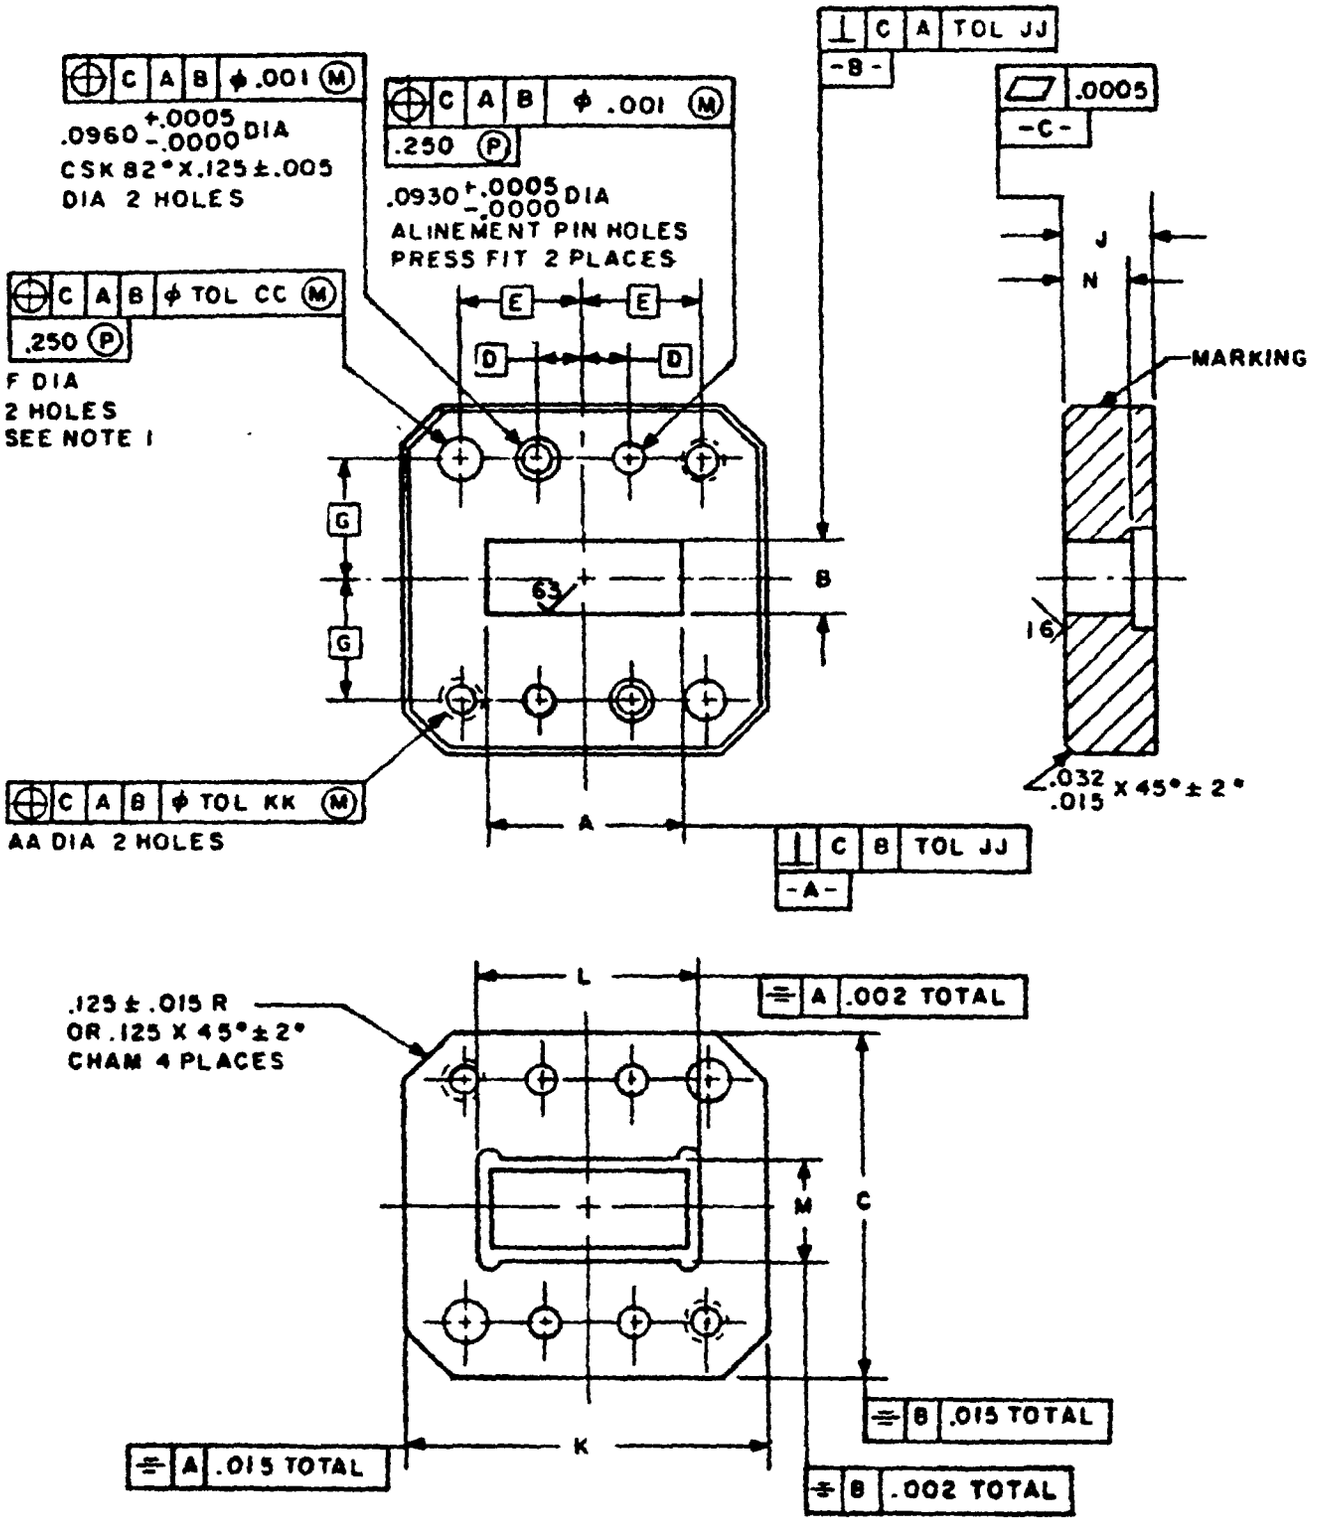

Configuration 10. Cover flanges, socket mounted (part number 21 and 22).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

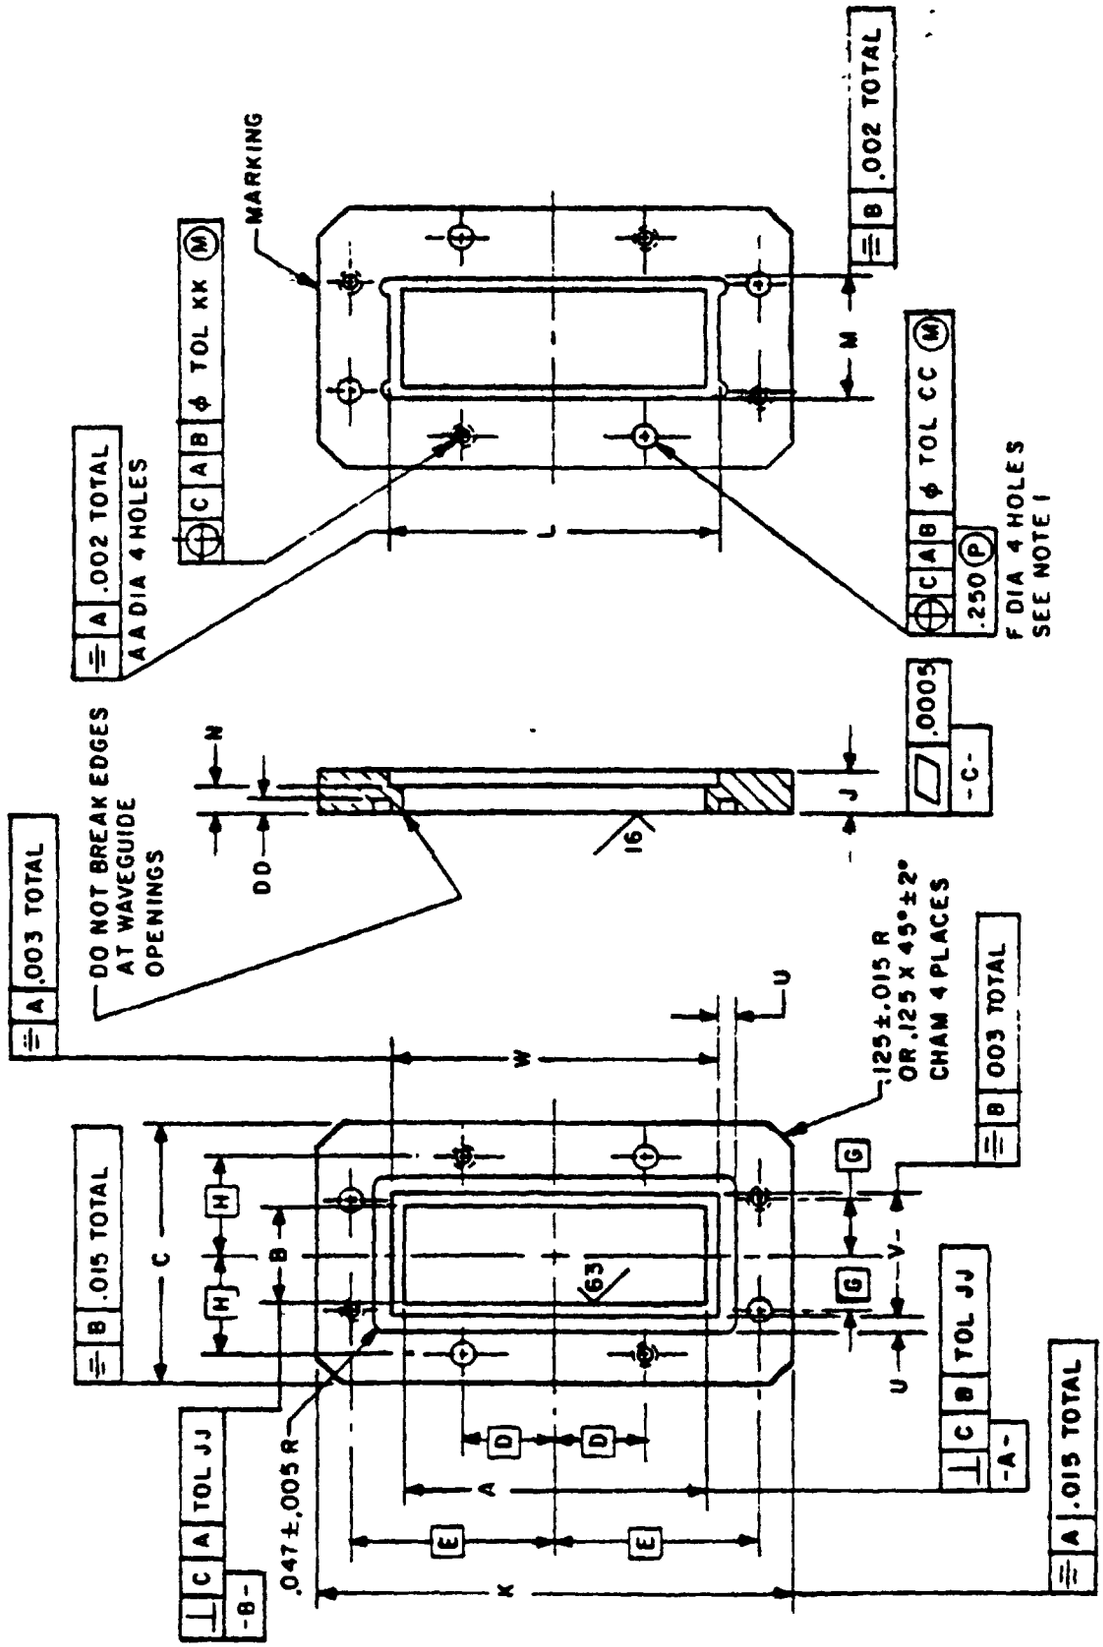

Configuration 11. Gasket flanges, socket mounted (part number 23).

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

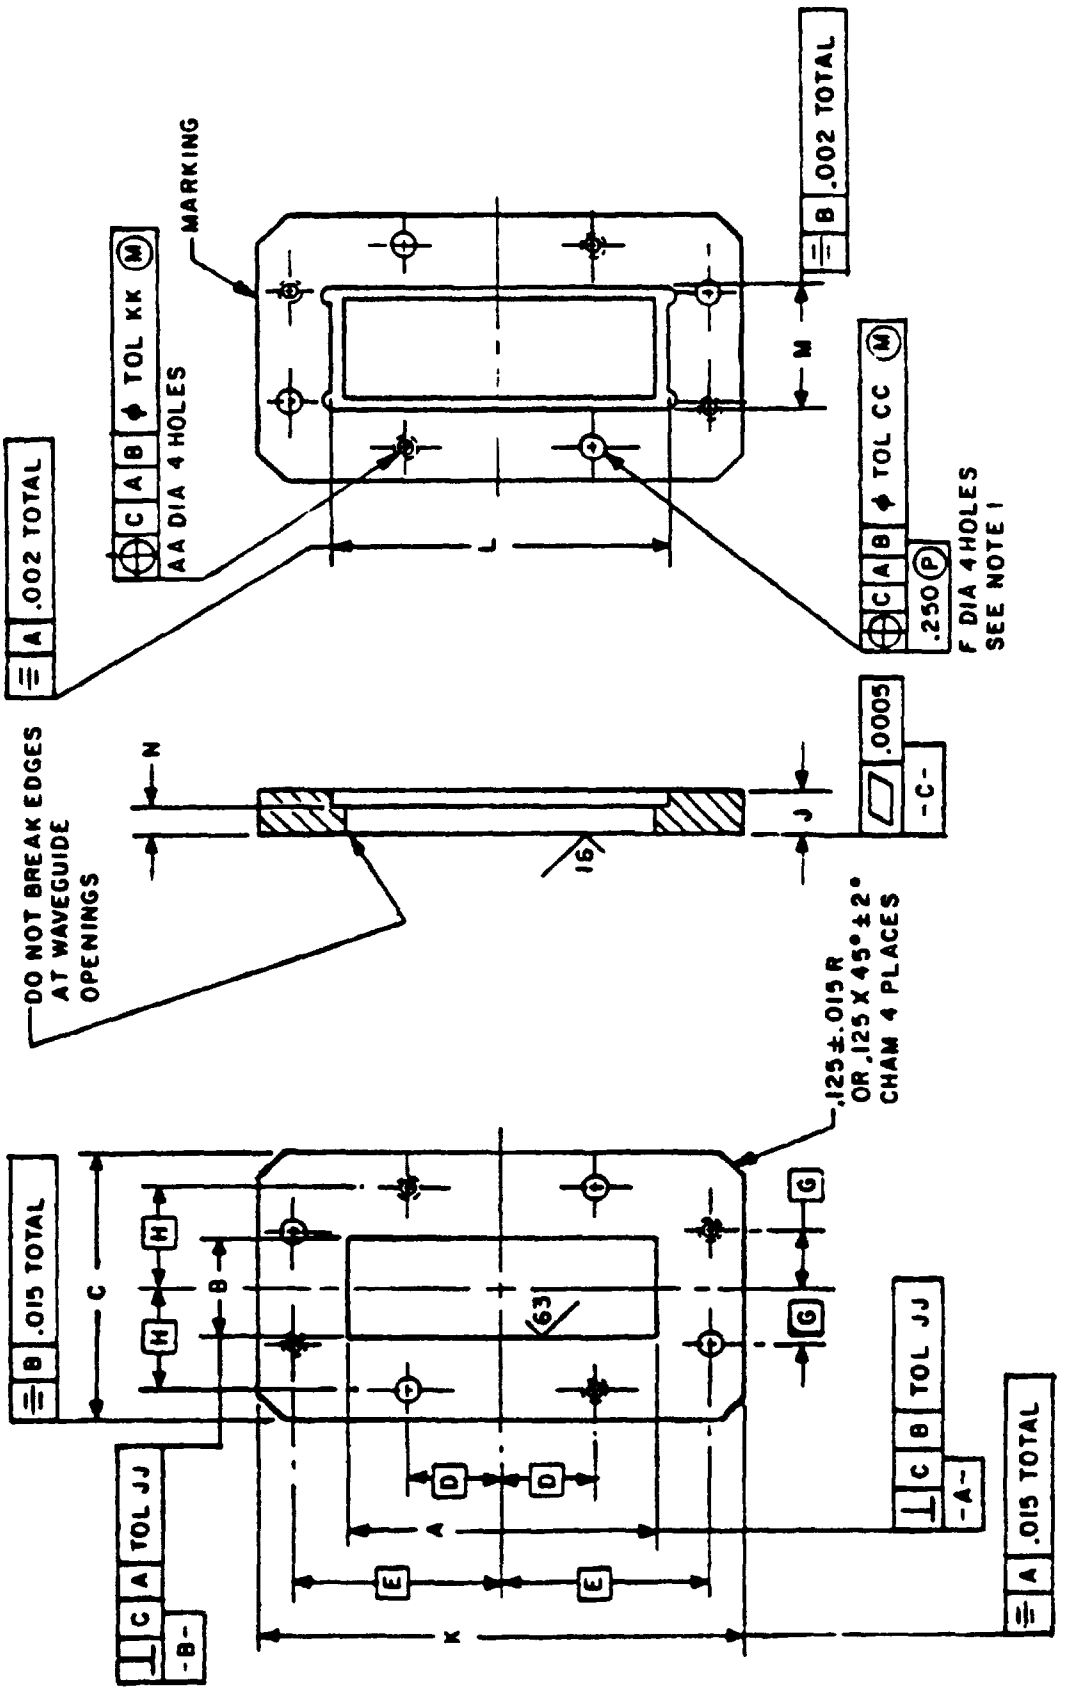

Configuration 12. Cover flange, socket mounted (part number 24).

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.0002	.005	.032	.81
.0005	.013	.046	1.17
.001	.02	.047	1.19
.002	.05	.06	1.5
.003	.08	.090	2.29
.004	.10	.0930	2.362
.005	.13	.0937	2.380
.008	.20	.094	2.39
.010	.25	.0960	2.438
.015	.38	.100	2.54
.016	.41	.125	3.18
.020	.51	.188	4.78
.030	.76	.250	6.35
		.500	12.70

NOTES:
1. The projected tolerance zone surface reference is datum C.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

07	/4-018	/75-07	08	/4-019 /4-020	/75-08	2	1.872 ±.003 (47.55) (.08)	.372 ±.003 (9.45) (.08)	2.500 ±.020 (63.50) (.51)
---	---	---	09	/1-157 /1-158 /1-160 5/	/75-09	3	1.020 ±.003 (25.91) (.08)	.255 ±.003 (6.48) (.08)	1.687 ±.015 (42.85) (.38)
---	---	---	10	/1-071 /1-072 /1-177 6/	/75-10	4	1.255 ± 003 (31.88) (.08)	.377 ±.003 (9.58) (.08)	1.875 ±.015 (47.62) (.38)
---	---	---	11	/1-077 /1-078 /1-178 7/	/75-12	5	.900 ±.002 (22.86) (.05)	.200 ±.002 (5.08) (.05)	.676 ±.010 (17.17) (.25)
---	---	---	12	/1-077 /1-078 /1-178 7/	/75-11	5	.900 ±.002 (22.86) (.05)	.200 ±.002 (5.08) (.05)	.676 ±.010 (17.17) (.25)
---	---	---	13	/1-077 8/	/75-14	5	.900 ±.002 (22.86) (.05)	.200 ±.002 (5.08) (.05)	.676 ±.010 (17.17) (.25)
---	---	---	14	/1-077 8/	/75-13	5	.900 ±.002 (22.86) (.05)	.200 ±.002 (5.08) (.05)	.676 ±.010 (17.17) (.25)
---	---	---	15	/4-013 /4-014	/75-15	6	10.250 ±.005 (260.35) (.13)	2.937 ±.005 (74.60) (.13)	5.930 ±.003 (150.62) (.08)
---	---	---	16	/4-021 /4-022	/75-16	6	10.125 ±.005 (257.18) (.13)	2.812 ±.005 (71.42) (.13)	5.930 ±.003 (150.62) (.08)
---	---	---	17	/4-032 /4-033	/75-18	7	.847 ±.003 (21.51) (.08)	.312 ±.003 (7.92) (.08)	1.375 ±.015 (34.92) (.38)
---	---	---	18	/4-032 /4-033	/75-17	8	.847 ±.003 (21.51) (.08)	.312 ±.003 (7.92) (.38)	1.375 ±.015 (34.92) (.38)
19	/4-027	/75-21	20	/4-028 /4-029	/75-22	9	.965 ±.002 (24.51) (.05)	.320 ±.002 (8.13) (.05)	1.50 ±.010 (38.1) (.25)
21	/4-027	/75-19	22	/4-028 /4-029	/75-20	10			
---	---	---	23	/4-023 /4-024	/75-24	11	1.668 ±.004 (42.37) (.10)	.506 ±.004 (12.85) (.10)	1.50 ±.010 (38.1) (.10)
---	---	---	24	/4-023 /4-024	/75-23	12			

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued.

Dash No. 3/	Dash No. 4/	Dimensions 1/ 2/ D BSC.	E BSC.	F BSC.	G BSC.	H BSC.	J	K	L
01	02	.750 (19.05)	2.250 (57.15)	---	1.500 (38.10)	---	.750 ±.015 (19.05) (.38)	5.500 +.060 -.000 (139.70) (1.52) -.000	3.014 +.004 -.000 (76.56) (.10) -.000
03	04	.375 (9.52)	1.187 (30.15)	---	.812 (20.62)	---	.625 ±.015 (15.88) (.38)	2.937 +.030 -.000 (74.60) (.76) -.000	1.512 +.003 -.000 (38.40) (.08) -.000
05	06	1.281 (32.54)	1.914 (48.62)	.257 ±.003 (6.53) (.08)	.578 (14.68)	1.164 (29.57)	.690 ±.020 (17.53) (.51)	4.50 ±.020 (114.3) (.51)	3.010 -.005 +.000 (76.45) (.13)
07	08	.563 (14.30)	1.914 (48.62)	---	.438 (11.13)	.914 (23.22)	.690 ±.020 (17.53) (.51)	3.500 ±.020 (88.90) (.51)	2.010 -.005 +.000 (51.05) (.13)
---	09	.640 (16.26)	---	---	.670 (17.02)	---	.500 ±.015 (12.70) (.38)	---	1.151 +.003 -.000 (29.24) (.08)
---	10	.676 (17.17)	---	---	.737 (18.72)	---	.438 ±.015 (11.13) (.38)	---	1.312 ±.015 (33.32) (.38)
---	11	.75 (19.0)	---	---	.150 (3.81)	---	.190 ±.010 (4.83) (.25)	1.800 ±.010 (45.72) (.25)	.963 +.003 -.000 (24.46) (.08)
---	12	.75 (19.0)	---	---	.150 (3.81)	---	.156 ±.010 (3.96) (.25)	1.800 ±.010 (45.72) (.25)	.963 +.003 -.000 (24.46) (.08)
---	13	.75 (19.0)	---	---	.150 (3.81)	---	.190 ±.010 (4.83) (.25)	1.800 ±.010 (45.72) (.25)	1.003 +.003 -.000 (25.48) (.08)
---	14	.75 (19.0)	---	---	.150 (3.81)	---	.156 ±.010 (3.96) (.25)	1.800 ±.010 (45.72) (.25)	1.003 +.003 -.000 (25.48) (.08)
---	15	2.000 (50.80)	4.000 (101.60)	5.875 (149.22) BSC	2.218 (56.34)	---	.625 ± .015 (15.88) (.38)	13.250 ±.03 (366.55) (.8)	---
---	16	2.000 (50.80)	4.000 (101.60)	5.875 (149.22) BSC	2.218 (56.34)	---	.625 ± .015 (15.88) (.38)	13.250 ±.03 (366.55 (.8)	---
---	17	.200 (5.08)	.423 (10.74)	.144 +.003 -.000 (3.66) (.08)	.500 (12.70)	---	.250 ±.015 (6.35) (.38)	1.375 ±.015 (34.92) (.38)	.977 +.003 -.000 (24.82) (.08)
---	18	.200 (5.08)	.423 (10.74)	.144 +.003 -.000 (3.66) (.08)	.500 (12.70)	---	.250 .015 (6.35) (.38)	1.375 .015 (34.92) (.38)	.977 +.003 -.000 (24.82) (.08)
19 21	20 22	.216 (5.49)	.562 (14.27)	---	.5625 (14.287)	---	.245 ±.010 (6.22) (.25)	1.62 ±.010 (41.1) (.25)	1.086 + .004 -.000 (27.58) (.10)
--- ---	23 24	.500 (12.70)	1.100 (27.94)	---	.314 (7.98)	.570 (14.48)	.250 ±.005 (6.35) (.13)	2.50 ±.010 (63.5) (.25)	1.800 +.004 -.000 (45.72) (.10)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-16T22:11Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued.

Dash No. 3/	Dash No. 4/	Dimensions 1/ 2/					
		M	N	P	R	S	T
01	02	1.178 +.004 (29.92) (.10) -.000	.500 ±.005 (12.70) (.13)	---	---	---	.090 ±.015 (2.29) (.38)
03	04	.627 +.003 (15.93) (.08) -.000	.375 ±.005 (9.52) (.13)	---	---	---	.063 ±.015 (1.60) (.38)
05	06	1.510 -.005 (38.35) (.13) +.000	.380 ±.005 (9.65) (.13)	.380 ±.020 (9.65) (.51)	3.250 ±.020 (82.55) (.51)	1.750 ±.020 (44.45) (.51)	---
07	08	1.010 -.005 (25.65) (.13) +.000	.380 ±.005 (9.65) (.13)	.380 ±.020 (9.65) (.51)	2.250 ±.020 (57.15) (.51)	1.250 ±.020 (31.75) (.51)	---
---	09	.641 +.003 (16.28) (.08) -.000		.250 ±.015 (6.35) (.38)	1.500 ±.015 (38.10) (.38)	---	---
---	10	---	---	.250 ±.015 (6.35) (.38)	1.531 ±.015 (38.89) (.38)	---	---
---	11	.263 +.003 (6.68) (.08) -.000	---	.140 ±.010 (3.56) (.25)	---	---	---
---	12	.263 +.003 (6.68) (.08) -.000	---	.110 ±.010 (2.79) (.25)	---	---	---
---	13	.303 +.003 (7.70) (.08) -.000	---	.140 ±.010 (3.56) (.25)	---	---	---
---	14	.303 +.003 (7.70) (.08) -.000	---	.110 ±.010 (2.79) (.25)	---	---	---
---	15	---	---	---	---	---	---
---	16	---	---	---	---	---	---
---	17	.442 +.003 (11.23) (.08) -.000	.145 ± .005 (3.68) (.13)	---	---	.175 ±.010 (4.44) (.25)	---
---	18	.442 +.003 (11.23) (.08) -.000	.145 ± .005 (3.68) (.13)	---	---	.175 ±.010 (4.44) (.25)	---
19 21	20 22	.440 +.002 (11.18) (.05) -.000	.125 ±.005 (3.18) (.13)	---	---	---	---
---	23 24	.638 +.004 (16.20) (.10) -.000	.125 ±.005 (3.18) (.13)	---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions - Continued.

Dash No. 3/	Dash No. 4/	Dimensions 1/ 2/						
		U	V	W	X	Y	Z	AA
01	02	---	1.419 ±.005 (36.04) (.13)	3.255 ±.005 (82.68) (.13)	---	---	---	.391 +.005 -.000 (9.93) (.13)
03	04	---	8.75 ±.005 (222.2) (.13)	1.750 ±.005 (44.45) (.13)	---	---	---	.204 +.004 -.000 (5.18) (.10)
05	06	3.500 ±.004 (88.90) (.10)	1.624 ±.004 (41.25) (.10)	3.124 ±.004 (79.35) (.10)	.003 (.08)	---	.002 Max (.05)	.257 ±.005 (6.53) (.13)
07	08	2.498 ±.004 (63.45) (.10)	1.122 ±.004 (28.50) (.10)	2.122 ±.004 (53.90) (.10)	.003 (.08)	---	.002 Max (.05)	.257 ±.005 (6.53) (.13)
---	09	---	---	---	---	---	---	.169 +.003 -.000 (4.29) (.08)
---	10	---	---	---	---	---	---	.169 +.003 -.000 (4.29) (.08)
---	11	---	---	---	---	.110 (2.79)	---	.138-32 UNC-2B THD thru
---	12	---	---	---	---	---	---	.149 ±.003 (3.78) (.08) Dia hole thru
---	13	---	---	---	---	.110 (2.79)	---	.138-32 UNC-2B THD thru
---	14	---	---	---	---	---	---	.149 ±.003 (3.78) (.08) Dia hole thru
---	15	---	---	---	---	---	---	.411 ±.005 (10.44) (.13)
---	16	---	---	---	---	---	---	.411 ±.005 (10.44) (.13)
---	17	.094 +.010 -.000 (2.39) (.25)	.437 ±.003 (11.10) (.08)	.967 ±.003 (24.56) (.08)	---	---	---	.138-32 UNC-2B
---	18	---	---	---	---	---	---	.138-32 UNC-2B
19	20	.094 +.010 (2.39) (.25)	.600 ±.004 (15.24) (.10)	1.214 ±.004 (30.84) (.10)	---	---	---	.138-32 UNC-2B
21	22	---	---	---	---	---	---	.138-32 UNC-2B
---	23	.094 +.010 (2.39) (.25)	.680 ±.002 (17.27) (.05)	1.792 ±.002 (45.52) (.05)	---	---	---	138-32 UNC-2B
---	24	---	---	---	---	---	---	.138-32 UNC-2B

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.


TABLE I. Part number characteristics and dimensions - Continued.

Dash No. 3/	Dash No. 4/	Dimensions 1/ 2/								
		BB	CC	DD	EE	FF	GG	HH	JJ	KK
01	02	---	---	.051 +.000 -.005 (1.30) (.13)	---	---	---	---	.004 (.10)	.016 (.41)
03	04	---	---	.028 +.000 -.003 (.71) (.08)	---	---	---	---	.004 (.10)	.014 (.36)
05	06	.531 ±.005 (13.49) (.13)	.004 (.10)	.053 ±.005 (1.34) (.13)	.094 ±.003 (2.39) (.08)	.310 ±.020 (7.87) (.51)	.05 Max (1.3)	.310 ±.020 (7.87) (.51)	.005 (.13)	.007 (.18)
07	08	.531 ±.005 (13.49) (.13)	---	.053 ±.005 (1.34) (.13)	.094 ±.003 (2.39) (.08)	.310 ±.020 (7.87) (.51)	.03 Max (.8)	.310 ±.020 (7.87) (.51)	.005 (.13)	.005 (.13)
---	09	---	---	---	---	---	---	---	.002 (.05)	.004 (.10)
---	10	---	---	---	---	---	.031 (.79)	---	.003 (.08)	.002 (.05)
---	11	---	---	---	---	---	---	---	.002 (.05)	.004 (.10)
---	12	---	---	---	---	---	---	---	.002 (.05)	.004 (.10)
---	13	---	---	---	---	---	---	---	.002 (.05)	.004 (.10)
---	14	---	---	---	---	---	---	---	.002 (.05)	.004 (.10)
---	15	---	---	---	---	---	---	---	.005 (.13)	.014 (.36)
---	16	---	---	---	---	---	---	---	.005 (.13)	.014 (.36)
---	17	---	.003 (.08)	.057 ±.001 (1.45) (.03)	---	---	---	---	.003 (.08)	.003 (.08)
---	18	---	.003 (.08)	---	---	---	---	---	.003 (.08)	.003 (.08)
19	20	---	.003 (.08)	.056 +.002 (1.42) (.05) -.000	---	---	---	---	.003 (.08)	.003 (.08)
21	22	---	.003 (.08)	---	---	---	---	---	.003 (.08)	.003 (.08)
---	23	---	.002) (.05)	.056 +.002 (1.42) (.05) -.000	---	---	---	---	.003 (.08)	.003 (.08)
---	24	---	.002 (.05)	---	---	---	---	---	.003 (.08)	.003 (08)

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3/ Material shall be copper alloy.
4/ Material shall be aluminum alloy.
5/ Waveguide shall be the same as MBS/1-157, 158, and 160 except the B dimension shall be .255 ±.003 (6.48 ±.08) and the D dimension .383 ±.005 (9.73 ±.13).
6/ Waveguide shall be the same as MBS/1-071, 072, and 177 except the B dimension shall be .248 ±.004 (6.30 ±.10) and the D dimension .376 ±.004 (9.55 ±.10).
7/ Waveguide shall be the same as MBS/1-077, 088, and 178 except the B dimension shall be .200 ±.004 (5.08 ±.10) and the D dimension .260 ±.004 (6.60 ±.10).
8/ Waveguide shall be the same as MBS/1-077 except the B dimension shall be .200 ±.004 (5.08 ±.10) and the D dimension .300 ±.004 (7.62 ±.10).

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

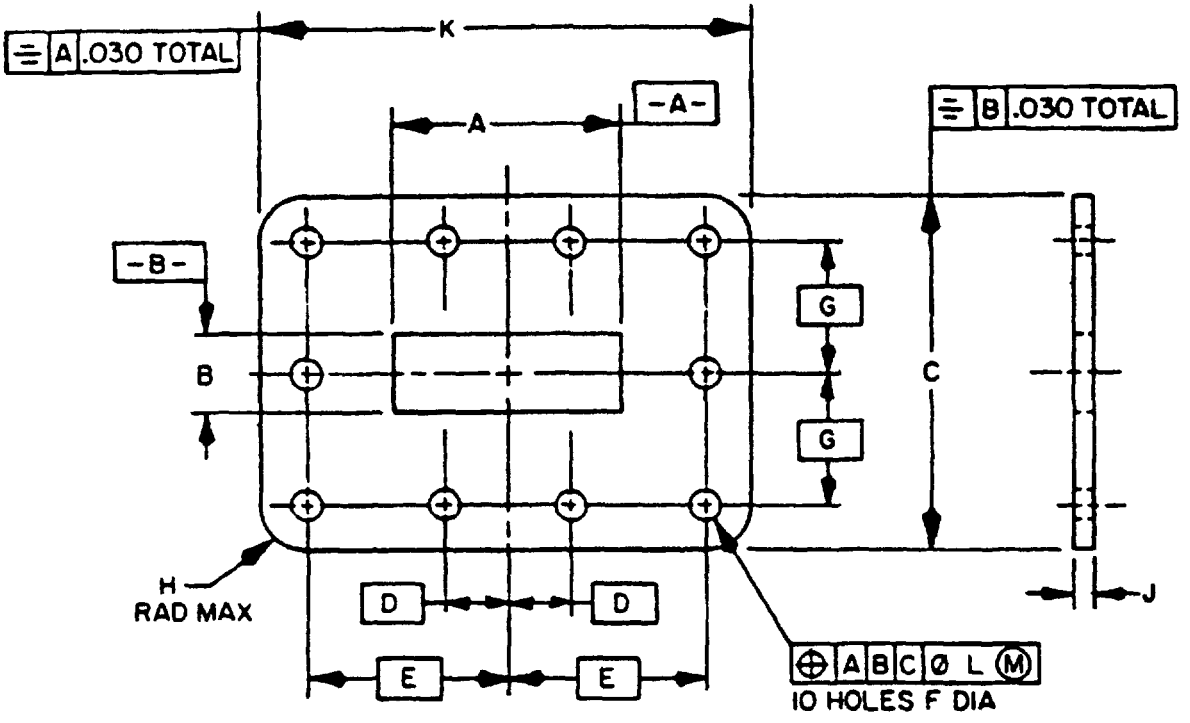


Used with part no. M3922/75-	A ±.015 (.38)	B ±.015 (.38)	C ±.015 (.38)	D BSC.	E BSC.	F ±.015 (.38)	G BSC.
01, 02	3.375 (85.72)	1.438 (36.53)	3.688 (93.68)	.750 (19.05)	2.250 (57.15)	.438 (11.13)	1.500 (38.10)
03, 04	1.750 (44.45)	.875 (22.22)	2.000 (50.80)	.375 (9.52)	1.188 (30.18)	.219 (5.56)	.812 (20.62)

Used with part no. M3922/75-	H	J	K	L
01, 02	.390 (9.91)	.125 ±.007 (3.18) (.18)	5.188 ±.015 (131.78) (.38)	.050 (1.27)
03, 04	.188 (4.78)	.062 ±.005 (1.57) (.13)	2.750 ±.015 (69.85) (.38)	.014 (.36)

Configuration 1. Gasket dimensions for part numbers 01, 02, 03, and 04.

FIGURE 2. Gaskets.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

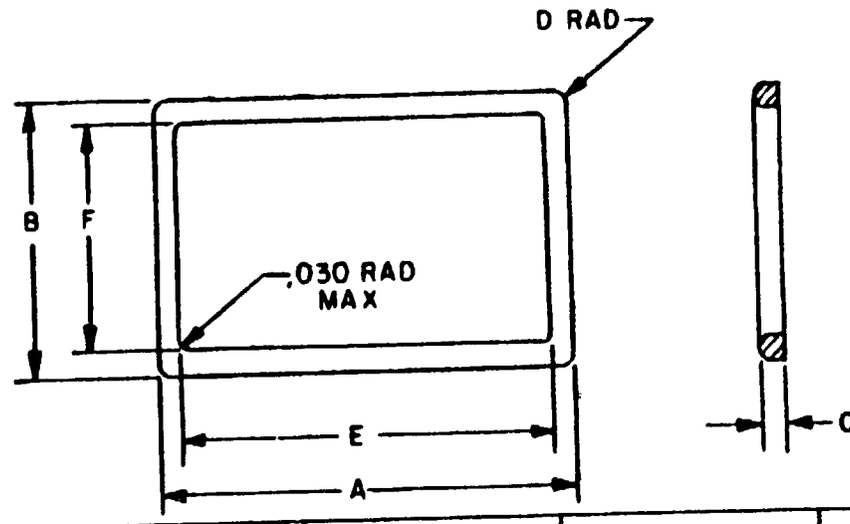

Used with part no. M3922/75-	A	B	C	D Rad	E	F
05, 06	3.451 ±.015 (87.66) (.38)	1.951 ±.004 (49.56) (.25)	.139 ±.004 (3.53) (.10)			
07, 08	2.449 ±.010 (62.20) (.25)	1.449 ±.010 (36.80) (.25)	.139 ±.004 (3.53) (.10)			
17			.067 ±.003 (1.70) (.08)	.047 ±.005 (1.19) (.13)	.969 ±.004 (24 61) (.10)	.439 ±.004 (11.15) (.10)
19			.067 ±.003 (1.70) (.08)	.047 ±.005 (1.19) (.13)	1.219 ±.004 (30.96) (.10)	.635 ±.004 (16.13) (.10)
20			.067 ±.003 (1.70) (.08)	.047 ±.005 (1.19) (.13)	1.219 ±.004 (30.96) (.10)	.635 ±.004 (16.13) (.10)
23			.067 ±.003 (1.70) (.08)	.047 ±.005 (1.19) (.13)	1.790 ±.004 (45.47) (.10)	.678 ±.004 (17.22) (.10)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

Configuration 2. Gasket dimensions for part number 05, 06, 07, 08, 17, 19, 20, and 23.

FIGURE 2. Gaskets - Continued.

Source: https://assist.dla.mil -- Downloaded: 20260-16T22:11Z
Check the source to verify that this is the current version before use.

TABLE II. Items supplied with flanges.

Item	M3922/75-01,02	M3922/75-03,04	M3922/75-05,06	M3922/75-07,08	M3922/75-15,16
Gasket	1 each (see figure 2, configuration 1)	1 each (see figure 2, configuration 1)	1 each (see figure 2, configuration 2)	1 each (see figure 2, configuration 2)	1 each (see MIL-G-24211/2-019)
Hex head cap screw	(9.53) 5 each, .375-16 UNC-2A 2.0 (50.80) long	(4.83) 6 each, .190-32 UNF-2A 1.50 (57.15) long	(6.35) 5 each, .250-20 UNC-2A 1.0 (25.40) long	(6.35) 5 each, .250-20 UNC-2A 1.0 (25.40) long	(9.53) 8 each, .375-16 UNC-2A 1.750 (44.45) long
Hex nut	(9.53) 5 each .375-16 UNC-2B	(4.83) 5 each, .190-32 UNF-2B	(6.35) 5 each, .250-20 UNC-2B	(6.35) 5 each, .250-20 UNC-2B	(9.53) 8 each, .375-16 UNC-2B
Spring lockwasher	5 each, .375 (9.53) x .094 (2.39) thick	5 each, .190 (4.83) x .047 (1.19) thick	5 each, .250 (6.35) x .062 (1.57) thick	5 each, .250 (6.35) x .062 (1.57) thick	8 each, .375 (9.53) x .094 (2.39) thick

Item	M3922/75-17	M3922/75-18	M3922/75-19&20	M3922/75-21&22	M3922/75-23	M3922/75-24
Gasket	1 each (see figure 2, configuration 2)	- - - -	1 each (see figure 2, configuration 2)	-- --	1 each (see figure 2, configuration 2)	-- - -
Hex head cap screw	(3.51) 2 each, .138-32 UNC-2A .50 long (12.7)	←	→	←	→	(3.51) 2 each, .138-32 UNC-2A .50 long (12.7)
Hex nut	-----	-----	-----	-----	-----	-----
Spring lockwasher	2 each, .138 x .031 thick (3.51) (0.79)	←	→	←	→	2 each, 138 x .013 thick (3.51) (0.79)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration:

Flange: See configurations 1 through 12 of figure 1 and table I.
Gasket: See configurations 1 and 2 of figure 2.

Material:

Flange: Metallic alloy as specified in table I.
Hex head cap screw, hex nut and spring lockwasher: Corrosion resisting steel in accordance with QQ-S-763, 300 series.

Gasket (Configuration 1): Class 4, Type A, Grade 60 Neoprene in accordance with MIL-R-6855.

Gasket (Configuration 2): Silicon rubber in accordance with AMS 3304.

Marking: See configurations 1 through 12 of figure 1.

Items supplied with flanges: See table II.

Part number: M3922/75 (dash number from table I).

Cross reference of part numbers: See table III.

TABLE III. Cross reference of part numbers to frequency range.

Part no. M3922/75	Frequency range (GHz)
01, 02	2.60-5.85
03, 04	5.85-12.4
05, 06	2.60-3.95
07, 08	3.95-5.85
09	7.00-11.0
10	7.05-10.0
11, 12, 13, 14	8.20-12.4
15, 16	.75-1.12
17,18	7.5-18.0
19,20,21,22	7.0-18.0
23, 24	4.3-10.5

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

SUBSTITUTABILITY DATA: Flanges covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table IV. This information in no way implies that the manufacturer's part numbers or NSN's are suitable as substitutes for the military part numbers.

TABLE IV. Substitute information.

Replacement Part numbers M3922/75	Manufacturer's code	Manufacturer's Part number	NSN
01	80058 80064 80064 80058 24469	UG 509/u RE49F554 RE-F2687361 UG1906/u SMS 75401	5985-00-280-3121
03	80058 80064 80064 80058 24469	UG511/u RE49F555 RE-F2687362 UG1909/u SMS75403	5985-00-665-0549
09	06351	M3922/75-09	---
10	06351	M3922/75-09	---
11	82577	929203-1C	---
12	82577	929203-2C	---
13	82577	929203-3C	---
14	82577	929203-4C	---
15	49956	705174	---
16	49956	707545	---
17	06351	MRC-F750G1	---
18	06351	MRC-F750C1	---
19	06351	MRC-F700BG1	---
20	06351	MRC-F700AG1	---
21	06351	MRC-F700BC1	---
22	06351	MRC-F700AC1	---
23	06351	MRC-F400G1	---
24	06351	MRC-F400C1	---

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, MC, SH

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0951)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12803 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Mil-F-3922/15B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:11Z
Check the source to verify that this is the current version before use.