
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (COVER) (WITH PRESSURIZATION FITTING)

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.

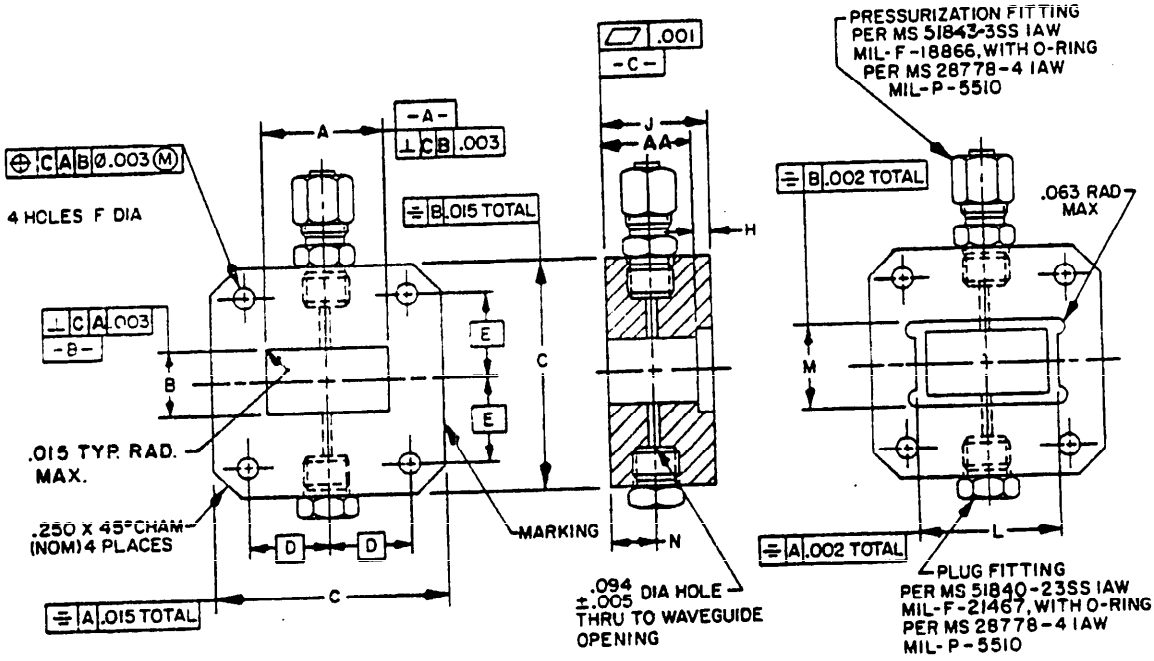


Configuration 1. Socket mount flange with fittings in broad wall of waveguide opening (part numbers -01 and -02).

FIGURE 1. Flanges.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

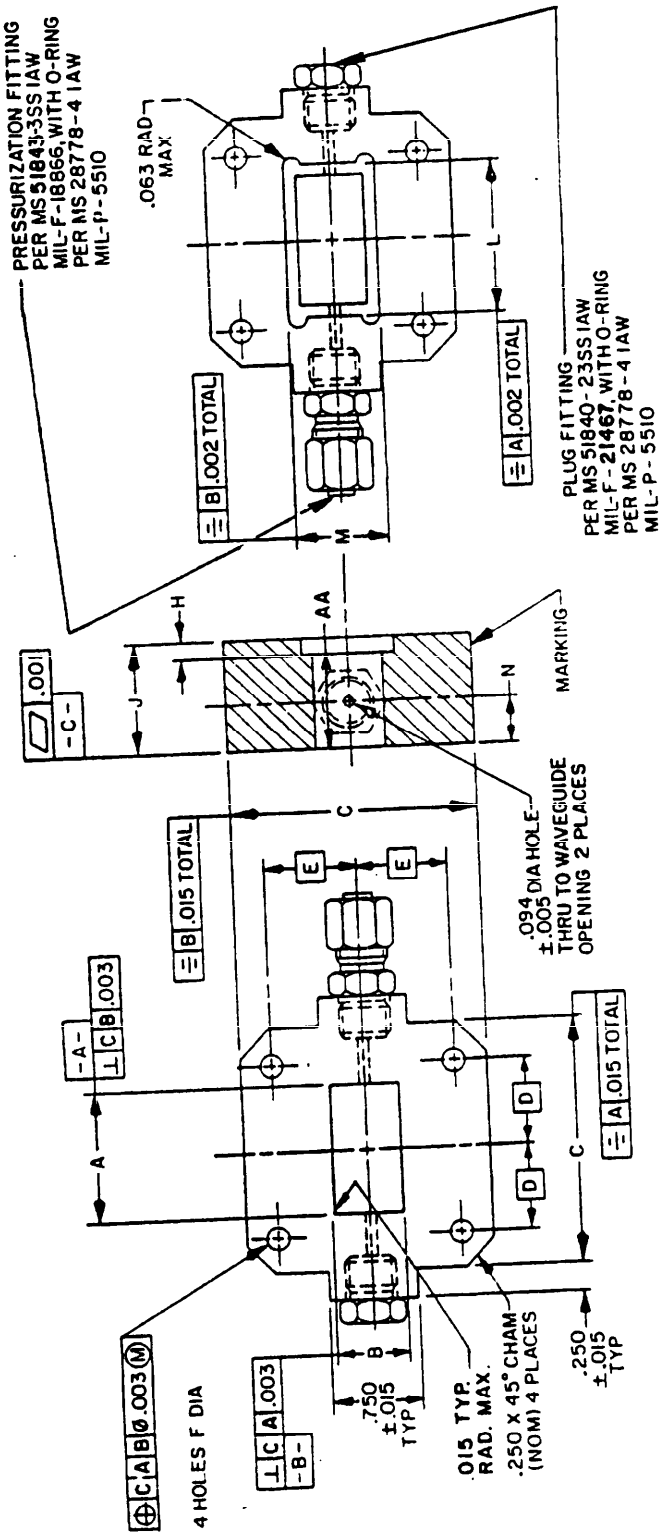

Configuration 2. Socket mount flange with fittings in narrow wall of waveguide opening (part numbers -03 and -04).

FIGURE 1. Flanges - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

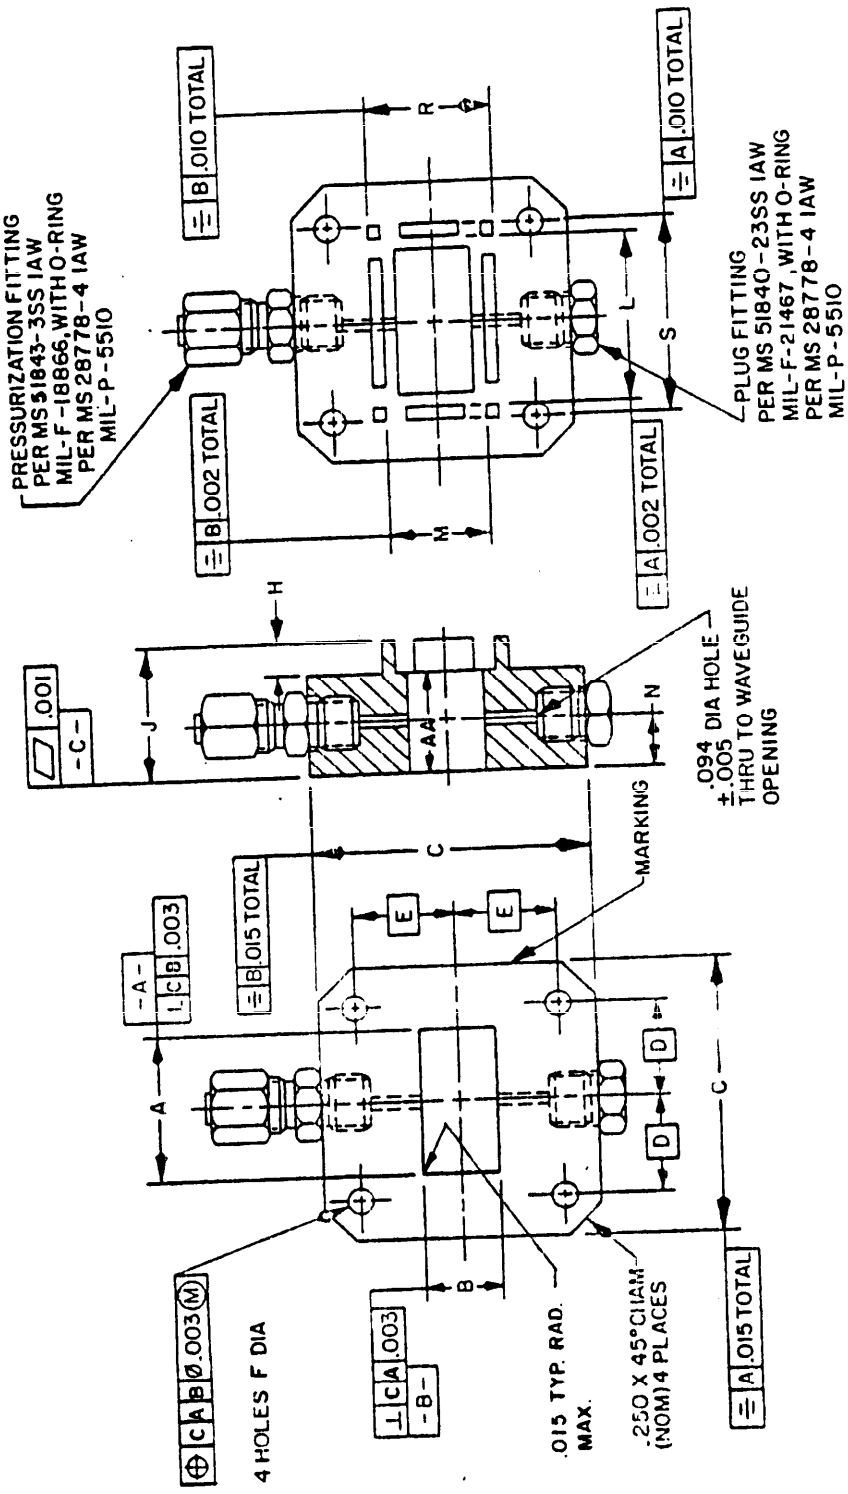

Configuration 3. Butt mount flange with fittings in broad wall of waveguide opening (part numbers -05 and -06).

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:10Z
Check the source to verify that this is the currentversion before use.

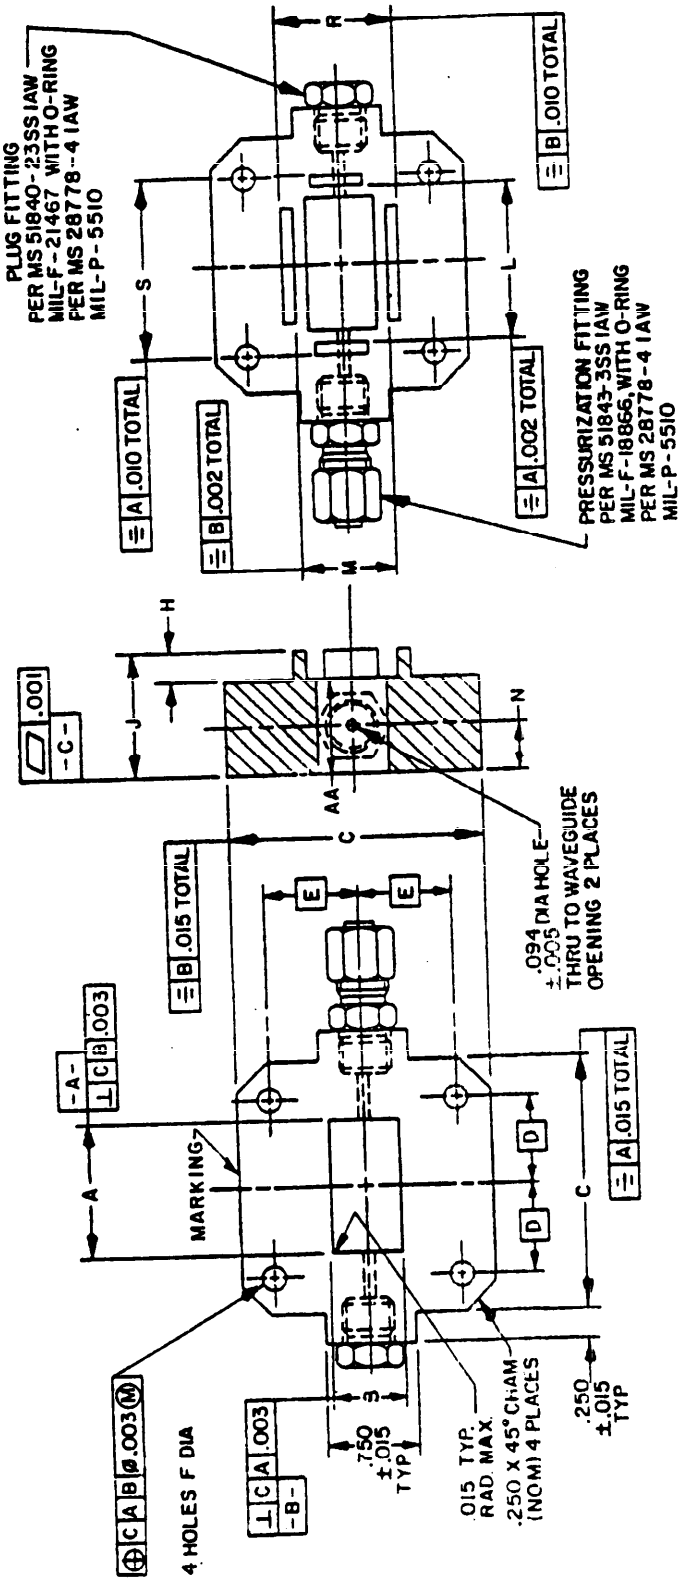

Configuration 4. Butt mount flange with fittings in narrow wall of waveguide opening (part numbers -07 and -08).

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:10Z
Check the source to verify that this is the current version before use.

TABLE I. Part number characteristics and dimensions.

Part number M3922/72-			Part number M3922/72-			Configuration No.	Dimensions					
	Used with			Used with								
Dash No. 1/	Waveguide M85/1-	Mating flange M3922/	Dash No. 2/	Waveguide M85/1-	Mating flange M3922/		A ±.003 (.08)	B ±.003 (.08)	C ±.015 (.38)	D BSC.	E BSC.	F Dia.
01	155, 156	69-001	02	157, 158, 160	69-002	1	1.020 (25.91)	.510 (12.95)	1.687 (42.85)	.640 (16.26)	.670 (17.02)	.169 +.003 -.000 (4.29) (.08)
03	155, 156	69-001	04	157, 158, 160	69-001, 002	2	1.020 (25.91)	.510 (12.95)	1.687 (42.85)	.640 (16.26)	.670 (17.02)	.169 +.003 -.000 (4.29) (.08)
05	155, 156	69-001	06	157, 158, 160	69-002	3	1.020 (25.91)	.510 (12.95)	1.687 (42.85)	.640 (16.26)	.670 (17.02)	.169 +.003 -.000 (4.29) (.08)
07	155, 156	69-001	08	157, 158, 160	69-001, 002	4	1.020 (25.91)	.510 (12.95)	1.687 (42.85)	.640 (16.26)	.670 (17.02)	.169 +.003 -.000 (4.29) (.08)

Dash No. 1/	Dash No. 2/	Dimensions							
		H ±.015 (.38)	J ±.015 (.38)	L	M	N ±.005 (.13)	R	S	AA ±.005 (.13)
01	02	.125 (3.18)	.750 (19.05)	1.153 +.003 -.000 (29.29) (.08)	.643 +.003 -.000 (16.33) (.08)	.350 (8.89)	---	---	.625 (15.88)
03	04	.125 (3.18)	.750 (19.05)	1.153 +.003 -.000 (29.29) (.08)	.643 +.003 -.000 (16.33) (.08)	.350 (8.89)	---	---	.625 (15.88)
05	06	.250 (6.35)	.875 (22.23)	1.153 +.003 -.000 (29.29) (.08)	.643 +.003 -.000 (16.33) (.08)	.312 (7.92)	.891 ±.010 (22.63) (.25)	1.431 ±.010 (36.35) (.25)	.625 (15.88)
07	08	.250 (6.35)	.875 (22.23)	1.153 +.003 -.000 (29.29) (.08)	.643 +.003 -.000 (16.33) (.08)	.312 (7.92)	.891 ±.010 (22.63) (.25)	1.431 ±.010 (36.35) (.25)	.625 (15.88)

1/ Material shall be copper alloy.
2/ Material shall be aluminum alloy.

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.001	.03	.015	.38
.002	.05	.063	1.60
.003	.08	.094	2.39
.005	.13	.250	6.35
.010	.25	.750	19.05

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Roughness of mating surfaces shall not exceed 63 microinches in accordance with ANSI-B46.1-1962, except that flaws shall be included in the roughness height measurement.

FIGURE 1. Flanges - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T22:10Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See configurations 1 through 4 and table I.

Material: Metallic alloy as specified in table I.

Surface roughness: The surface roughness for the four inside walls of each flange shall be the same as the surface roughness requirements of the interfacing waveguide.

Marking: See configurations 1 through 4.

Pressurization: Flanges shall be capable of holding a pressure of 30 lb_f/in^2 gage of dry nitrogen gas for a period of 5 minutes without leakage.

Note: The waveguide flanges listed in this specification are to be supplied with the associated pressurization fittings installed in the flanges.

Part number: M3922/72- (dash number from table I).

ENGINEERING INFORMATION:

Frequency range: See table II.

TABLE II. Engineering information.

Part number M3922/72-	Frequency range (GHz)
01,02,03,04, 05,06,07,08	7.0-11.0

Supersession data: See table III.

TABLE III. Supersession data.

Superseded type	Superseding part number M3922/72-
UG-1910/U	05

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-N442-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.