
MILITARY SPECIFICATION SHEET

FLANGES, WAVEGUIDE (CONTACT)
(ROUND, 4 HOLE)(SUBMILLIMETER)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the flanges described herein shall consist of this document and the latest issue of Specification MIL-F-3922.

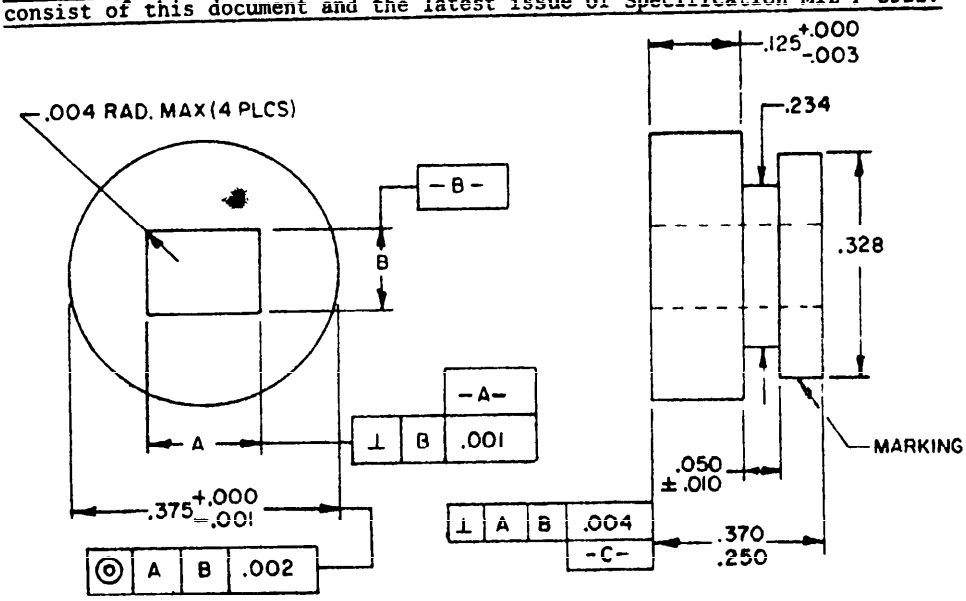

INCHES	MM
.001	.03
.002	.05
.003	.08
.004	.10
.010	.25
.050	1.27
.125	3.18
.234	5.94
.250	6.35
.328	8.33
.370	9.40
.375	9.53

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise indicated, tolerance is ±.005 (.13 mm).
4. See table I for lettered dimensions.

FIGURE 1. Flange.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 202610-16T22:10Z
Check the source to verify that this is the currentversion before use.

d physical dimensions: See figure 1 and table I. Design construction an

TABLE I. Flange dimensions.

Part number M3922/74 -			Dimensions 1/	
	Used with			
Dash number	Waveguide M85/3-	Mating flange M3922/74	A +.002 (.05) -.000	B +.0020 (.05) -.0000
001	026, 027, 028	001	.161 (4.09)	.1210 (3.07)
002	029, 030, 031	002	.146 (3.71)	.1135 (2.88)
003	032, 033, 034	003	.132 (3.35)	.1065 (2.71)
004	035, 036, 037	004	.124 (3.15)	.1025 (2.61)
005	038, 039, 040	005	.115 (2.92)	.0980 (2.49)

1/ Metric equivalents are in parentheses.

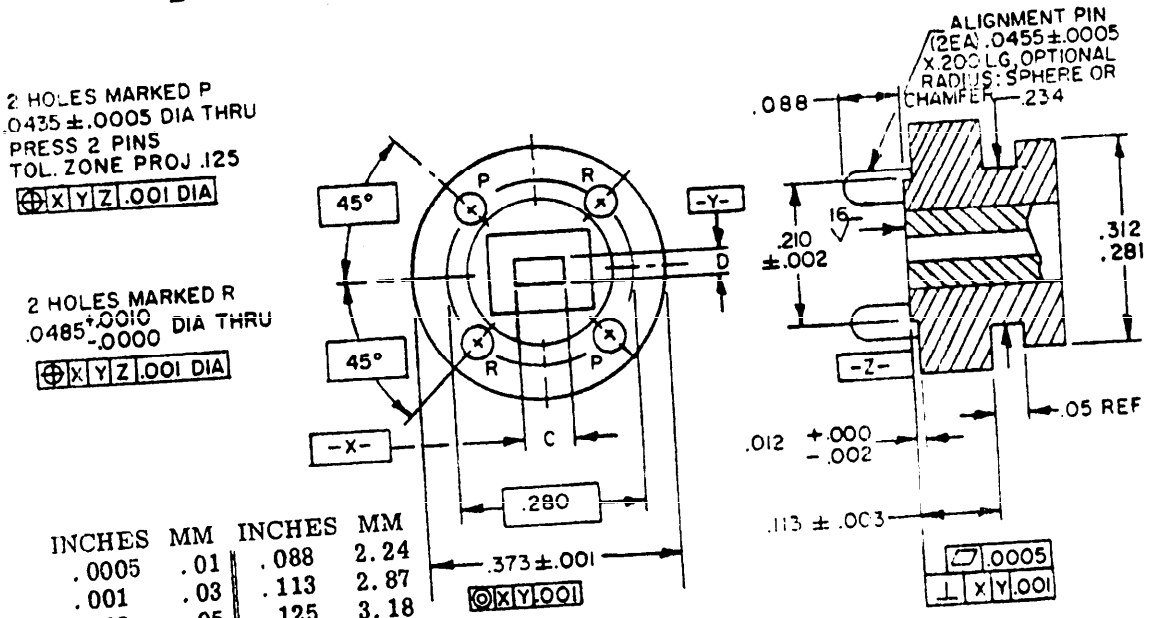

INCHES	MM	INCHES	MM
.0005	.01	.088	2.24
.001	.03	.113	2.87
.002	.05	.125	3.18
.003	.08	.200	5.08
.005	.13	.210	5.33
.012	.30	.234	5.94
.0435	1.10	.2800	7.11
.0455	1.16	.281	7.14
.0485	1.23	.312	7.92
.050	1.27	.373	9.47

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. See table II for lettered dimensions.

FIGURE 2. Finished flange and waveguide assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

TABLE II. Finished flange and waveguide assembly dimensions.

Part number M3922/74 -	Dimensions 1/	
	C ±.0005 (.01)	D ±.0005 (.01)
001	.0800 (2.03)	.0400 (1.02)
002	.0650 (1.65)	.0325 (.83)
003	.0510 (1.30)	.0255 (.65)
004	.0430 (1.09)	.0215 (.55)
005	.0340 (.86)	.0170 (.43)

1/ Metric equivalents are in parentheses.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.
Material: Copper alloy.
Marking: See figure 1.
Part number: M3922/74-(dash number from table I).
Coupling assembly: As specified in MIL-C-39004/2.

ENGINEERING INFORMATION:

Finished flange and waveguide assembly: See figure 2 and table II.
Frequency range and return loss data: See table III.

TABLE III. Frequency range and return loss data.

Part number M3922/74	Frequency range	Worst case return loss (dB)	
		Lowest frequency	Highest frequency
	GHz		
001	90.0 - 140.0	-30.1	-37.4
002	110.0 - 170.0	-26.4	-33.7
003	140.0 - 220.0	-22.1	-29.6
004	170.0 - 260.0	-19.7	-26.6
005	220.0 - 325.0	-16.3	-22.4

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, MU, SG
Navy - OS
Air Force - 11, 80
DSA - ES

User activities:
Army - ME
Navy - AS, MC, CG
Air Force - 14, 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0812)

Source: https://assist.dla.mil -- Downloaded: 20260-16T22:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Chief of Naval Material
ATTN: MAT 0434
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:10Z
Check the source to verify that this is the current version before use.